MELSEC System Q

Programmable Logic Controllers

User's Manual

Digital I/O Modules
QX□□ / QY□□

Art. no.: 130383
01 05 2003
SH(NA)-080042
Version L

• SAFETY PRECAUTIONS •

(Always read these instructions before using this equipment.)

Before using this product, please read this manual and the relevant manuals introduced in this manual carefully and pay full attention to safety to handle the product correctly.
The instructions given in this manual are concerned with this product. For the safety instructions of the programmable controller system, please read the CPU module user's manual.
In this manual, the safety instructions are ranked as "DANGER" and "CAUTION".

⚠ DANGER	Indicates that incorrect handling may cause hazardous conditions, resulting in death or severe injury.
⚠ CAUTION	Indicates that incorrect handling may cause hazardous conditions, resulting in medium or slight personal injury or physical damage.

Note that the ⚠CAUTION level may lead to a serious consequence according to the circumstances. Always follow the instructions of both levels because they are important to personal safety.

Please save this manual to make it accessible when required and always forward it to the end user.

[Design Instructions]

⚠ DANGER

• Install a safety circuit external to the PLC that keeps the entire system safe if there are problems with the external power supply or PLC. Not doing so may cause false output or malfunction, leading to accidents.

(1) Outside the PLC, construct mechanical damage preventing interlock circuits, e.g. emergency stop circuits, protective circuits, forward/reverse or other conflicting operation interlocking circuits, and upper and lower positioning limit switches.

(2) When the PLC detects either of the following problems, it will stop arithmetic operation and turn off all outputs in the case of (a). In the case of (b), it will stop arithmetic operation and hold or turn off all outputs according to the parameter setting.

(a) The overcurrent protection or overvoltage protection of the power supply module is activated.

(b) The self-diagnostic function of the PLC CPU has detected a fault such as the watchdog timer error.

In addition, all outputs may be turned on when there are problems undetectable by the PLC CPU, such as in the I/O controller. Build a fail-safe circuit or provide a mechanism externally of the PLC to operate the machine safely at such times. Refer to the CPU module user's manual for fail-safe circuit examples.

(3) Output could be left on or off when there is trouble in the output module's relays, transistors, etc. So build an external monitoring circuit that will monitor any output signal that could lead to a serious accident.

A - 1

[Design Instructions]

⚠ DANGER

- When overcurrent exceeding the rated load current or caused by a shorted load or the like flows in the output module for a long time, it may cause smoke or fire. To prevent this, configure an external safety circuit, such as fuses.
- Build a circuit that turns on the external power supply after the PLC power supply has been turned on. If the external power supply is turned on first, it could result in false output or malfunction.
- When there are communication problems with the data link, refer to the corresponding data link manual for the operating status of each station. Not doing so could result in false output or malfunction.
- When connecting a peripheral device to the CPU module or connecting a personal computer or the like to the intelligent function module to exercise control (data change) on the running PLC, configure up an interlock circuit in the sequence program to ensure that the whole system will always operate safely.
  Also before exercising other control (program change, operating status change (status control)) on the running PLC, read the manual carefully and fully confirm safety.
  Especially for the above control on the remote PLC from an external device, an immediate action may not be taken for PLC trouble due to a data communication fault.
  In addition to configuring up the interlock circuit in the sequence program, corrective and other actions to be taken as a system for the occurrence of a data communication fault should be predetermined between the external device and PLC CPU.

⚠ CAUTION

- Do not bundle the control wires or communication cables with the main circuit or power wires, or run them close to each other.
  They should be run 100mm (3.94in.) or more away from each other.
  Not doing so could result in noise that would cause malfunction.
- When the output module is used to control a lamp load, heater, solenoid valve or the like, large current (approximately 10 times greater than the normal) may flow when the output is turned from OFF to ON. Choose an output module having a sufficient rated current.

[Installation Instructions]

⚠ CAUTION

- Use the PLC in the environment that meets the general specifications given in this manual. Using this PLC in the environment outside the range of the general specifications could result in electric shock, fire, malfunction, or damage to, or deterioration of the product.
- Hold down the module-loading lever at the module bottom, and securely insert the module-fixing hook into the fixing hole in the base unit. Incorrect loading of the module can cause a malfunction, failure or drop.
  When using the PLC in the environment of much vibration, tighten the module with a screw. Tighten the screw in the specified torque range. Undertightening can cause a drop, short circuit or malfunction. Overtightening can cause a drop, short circuit or malfunction due to damage to the screw or module.
- When installing extension cables, be sure that the connectors of base unit are installed correctly. After installation, check them for looseness. Poor connections could cause an input or output failure.
- Securely load the memory card by pushing it into the memory card loading connector. After loading, make a check. Not doing so can cause malfunction due to a contact fault.
- Completely turn off the external power supply before loading or unloading the module. Not doing so could result in damage to the product.
- Do not directly touch the module's conductive parts.
  Doing so could cause malfunction or failure of the module.

[Wiring Instructions]

⚠ DANGER

- Completely turn off the external power supply before starting wiring. Not doing so could result in electric shock or damage to the product.
- When turning on the power supply or starting operation after wiring work, always mount the product with the supplied terminal cover.
  Not doing so could result in electric shock.

A - 3

[Wiring Instructions]

⚠ CAUTION

- Always ground the FG and LG terminals to the protective ground conductor. Not doing so could result in electric shock or malfunction.
- Before wiring the module, confirm the rated voltage and terminal layout of the product.
  Connecting a power supply that is different from the rating or incorrectly wiring the product could result in fire or failure.
- External connectors should be crimped or pressure-welded with the specified tools, or correctly soldered. Imperfect connections could result in short circuit, fires or malfunction.
- Tighten the terminal screws in the specified torque range.
  Undertightening could result in short circuit, fire or malfunction.
  Overtightening could cause damage to the screws and/or the module, resulting in drop, short circuit or malfunction.
- Be careful not to allow foreign matter such as chips and wire off-cuts to enter the module.
  Foreign matter could cause fire, failure, or malfunction.
- The module has an ingress prevention label on its top to prevent foreign matter, such as wire offcuts, from entering the module during wiring.
  Do not peel this label during wiring.
  Before starting system operation, be sure to peel this label because of heat dissipation.

[Startup/Maintenance Instructions]

⚠ DANGER

- Do not touch the terminals while power is on.
  Doing so could cause electric shock.
- Correctly connect the battery. Do not charge, disassemble, heat, place in fire, short circuit, or solder the battery.
  Mishandling of the battery can cause heat generation, burst or ignition which could result in injury or fire.
- Always turn off the external power supply completely before cleaning the module or retightening the terminal or module mounting screws.
  Not doing so could result in electric shock.
  Undertightening of terminal screws can cause a short circuit or malfunction.
  Overtightening of screws can cause damage to the screws and/or the module, resulting in drop, short circuit, or malfunction

A - 4

[Startup/Maintenance Instructions]

⚠ CAUTION
• The online operations conducted for the running CPU module by connecting a peripheral device (especially program modification, forced output, operating status change) should be performed after you have read the manual carefully read and fully confirmed safety. Operation mistakes could cause machine damage or accident. • Do not disassemble or modify the modules. Doing so could cause failure, malfunction, injury or fire. • Always switch off the external power supply completely before mounting or removing the module. Not doing so can cause failure or malfunction of the module. • Before touching the module, always touch grounded metal, etc. to discharge static electricity from human body, etc. Not doing so can cause the module to fail or malfunction.

[Disposal Instructions]

⚠ CAUTION
• When disposing of this product, treat it as industrial waste.

A - 5

REVISIONS

* The manual number is given on the bottom left of the back cover.

Print Date	* Manual Number	Revision
Dec., 1999	SH (NA)-080042-A	First edition
Feb., 2000	SH (NA)-080042-B	Addition model QH42P, QX48Y57, QX70, QX71, QX72, QY18A Addition Chapter 4 Partial correction Section 1.2, Chapter 5, 8.1, Chapters 4 to 8 (changed into Chapters 5 to 9)
Apr., 2000	SH (NA)-080042-C	Deletion QY18A
Jul., 2000	SH (NA)-080042-D	Addition model QX28,QX40-S1,QY18A,QY22,QI60 Addition Chapter 5 Partial correction Section 1.2 Chapters 5 to 9 (changed into Chapters 6 to 10)
Nov., 2000	SH (NA)-080042-E	Addition model QY70, QY71 Addition Section 1.3 Partial correction CONTENTS, Section 3.3, 5.1
Jan., 2001	SH (NA)-080042-F	Addition model QY68A Addition Section 10.2 Partial correction CONTENTS, Section 1.2, 3.3, 5.1, Chapters 7
Mar., 2001	SH (NA)-080042-G	Partial correction Section 2.4, 8.1
Jul., 2001	SH (NA)-080042-H	Addition model Q6TE-18S Addition Chapter 9, APP 1.3 Partial correction CONTENTS, Section 2.1, 2.2, 2.4, 5.1 Chapters 9 to 10 (changed into Chapters 10 to 11)
Jul., 2002	SH (NA)-080042-I	Addition model QX41-S1, QX42-S1, A6CON4

Japanese Manual Version SH-080024-L

This manual confers no industrial property rights or any rights of any other kind, nor does it confer any patent licenses. Mitsubishi Electric Corporation cannot be held responsible for any problems involving industrial property rights which may occur as a result of using the contents noted in this manual.

© 1999 MITSUBISHI ELECTRIC CORPORATION

Print Date	✻ Manual Number	Revision
Mar., 2003	SH (NA)-080042-J	Addition model QX82
May., 2003	SH (NA)-080042-K	Partial correction Section 1.2, 2.2
May., 2003	SH (NA)-080042-L	Addition model QX82-S1 Partial correction Section 1.2, 3.3 Addition Section 2.15

INTRODUCTION

Thank you for choosing the MITSUBISHI MELSEC-Q Series General-Purpose Programmable Logic Controller. Before using this product, please read this manual carefully to use the equipment to its optimum.

CONTENTS

About Manuals ..... A- 10

1. GENERAL SPECIFICATIONS OF INPUT AND OUTPUT MODULES AND INSTRUCTIONS FOR SELECTING THEM 1- 1 to 1- 12

1.1 General Specifications 1- 1
1.2 Selecting Instructions 1- 1
1.3 How to Make Settings on GX Developer 1- 8
1.3.1 Setting of I/O response time 1- 8
1.3.2 Setting of error-time output mode 1-10
1.3.3 QI60 switch setting 1-11

2. INPUT MODULE SPECIFICATIONS 2- 1 to 2-18

2.1 QX10 AC Input Module 2- 1
2.2 QX28 AC Input Module 2- 2
2.3 QX40 DC Input Module (Positive Common Type) 2- 3
2.4 QX40-S1 DC Input Module (Positive Common Type) 2- 4
2.5 QX41 DC Input Module (Positive Common Type) 2- 5
2.6 QX41-S1 DC Input Module (Positive Common Type) 2- 6
2.7 QX42 DC Input Module (Positive Common Type) 2- 8
2.8 QX42-S1 DC Input Module (Positive Common Type) 2- 9
2.9 QX70 DC Input Module (Positive Common/Negative Common Shared Type) 2-11
2.10 QX71 DC Input Module (Positive Common/Negative Common Shared Type) 2-12
2.11 QX72 DC Input Module (Positive Common/Negative Common Shared Type) 2-13
2.12 QX80 DC Input Module (Negative Common Type) 2-14
2.13 QX81 DC Input Module (Negative Common Type) 2-15
2.14 QX82 DC Input Module (Negative Common Type) 2-16
2.15 QX82-S1 DC Input Module (Negative Common Type) 2-17

3. OUTPUT MODULE SPECIFICATIONS 3- 1 to 3- 13

3.1 QY10 Contact Output Module 3- 1
3.2 QY18A Contact Output Module (All Points Independent) 3- 2
3.3 QY22 TRIAC Output Module 3- 3
3.4 QY40P Transistor Output Module (Sink Type) 3- 4
3.5 QY41P Transistor Output Module (Sink Type) 3- 5
3.6 QY42P Transistor Output Module (Sink Type) 3- 6
3.7 QY50 Transistor Output Module (Sink Type) 3- 7
3.8 QY68 Transistor Output Module (All Points Independent, Sink/Source Type) 3- 8
3.9 QY70 Transistor Output Module (Sink Type) 3- 9
3.10 QY71 Transistor Output Module (Sink Type) 3-10
3.11 QY80 Transistor Output Module (Source Type) 3-11

3.12 QY81P Transistor Output Module (Source Type) 3-12

4. INPUT/OUTPUT CONPOSITE MODULE 4- 1 to 4- 4

4.1 QH42P I/O Module 4- 1
4.2 QX48Y57 I/O Module 4- 3

5. INTERRUPT MODULE 5- 1 to 5- 2

5.1 QI60 Interrupt Module 5- 1

6. BLANK COVER MODULE 6- 1 to 6- 2

7. CONNECTORS 7- 1 to 7- 2

8. SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES 8- 1 to 8- 7

8.1 Specifications of Connector/Terminal Block Convertor Modules 8- 1
8.2 Connector/Terminal Block Convertor Module Connection Diagrams 8- 3
8.2.1 A6TBXY36 ..... 8- 3
8.2.2 A6TBXY54 ..... 8- 4
8.2.3 A6TBX70 ..... 8- 5
8.2.4 A6TBX36-E 8- 5
8.2.5 A6TBY36-E 8- 6
8.2.6 A6TBX54-E 8- 6
8.2.7 A6TBY54-E 8- 7
8.2.8 A6TBX70-E 8- 7

9. SPRING CLAMP TERMINAL BLOCK 9- 1 to 9- 2

9.1 Q6TE-18S 9- 1

10. NAMES OF MODULE PARTS 10- 1 to 10- 4

11. I/O MODULE TROUBLESHOOTING 11- 1 to 11- 4

11.1 Input Circuit Troubleshooting 11- 1
11.2 Output Circuit Troubleshooting 11- 4

APPENDICES App- 1 to App- 9

Appendix 1 External Dimensional Drawings ..... App- 1
Appendix 1.1 I/O modules ..... App- 1
Appendix 1.2 Connectors, connector/terminal block converter modules ..... App- 4
Appendix 1.3 Spring Clamp Terminal Block ..... App- 7
Appendix 2 Compatibility with MELSEC-AnS Series I/O modules ..... App- 8

About Manuals

The following manuals are also related to this product.

In necessary, order them by quoting the details in the tables below.

Related Manuals

Manual Name	Manual Number (Model Code)
Basic model QCPU (Q Mode) User's Manual (Hardware Design/Maintenance and Inspection) This manual provides the specifications of the CPU modules, power supply modules, base units, extension cables, memory cards and others. (Optional)	SH-080187 (13JR43)
Basic model QCPU (Q Mode) User's Manual (Function Explanation/Program Fundamentals) This manual explains the functions, programming methods, devices and so on necessary to create programs with the QCPU (Q mode). (Optional)	SH-080188 (13JR44)
High Performance model QCPU (Q Mode) User's Manual (Hardware Design/Maintenance and Inspection) This manual provides the specifications of the CPU modules, power supply modules, base units, extension cables, memory cards and others. (Optional)	SH-080037 (13JL97)
High Performance model QCPU (Q Mode) User's Manual (Function Explanation/Program Fundamentals) This manual explains the functions, programming methods, devices and so on necessary to create programs with the QCPU (Q mode). (Optional)	SH-080038 (13JL98)

Conformation to the EMC Directive and Low Voltage Instruction

For details on making Mitsubishi PLC conform to the EMC directive and low voltage instruction when installing it in your product, please refer to Chapter 3, "EMC Directive and Low Voltage Instruction" of the PLC CPU User's Manual(Hardware).
The CE logo is printed on the rating plate on the main body of the PLC that conforms to the EMC directive and low voltage instruction.

1. GENERAL SPECIFICATIONS OF INPUT AND OUTPUT MODULES AND INSTRUCTIONS FOR SELECTING THEM

This chapter describes the general specifications of I/O modules and instructions for selecting them.

1.1 General Specifications

Refer to the following manual for the general specifications of the I/O modules.

- Basic model QCPU (Q Mode) User's Manual (Hardware Design/Maintenance and Inspection)
- High Performance model QCPU (Q Mode) User's Manual (Hardware Design/ Maintenance and Inspection)

1.2 Selecting Instructions

(1) If an output module drives an inductive load, it must be switched ON for 1 second or longer and switched OFF for 1 second or longer.

(2) If a counter or timer which has a DC-DC converter as a load is used with an output module, using an average current to choose an output module can cause a fault due to periodic rush currents when it is turned ON or during operation.
To reduce the influence of rush currents for use of the above load, connect a resistor or an inductance to the load in series or use a module whose maximum load current is larger.





(3) Fuses installed in output modules cannot be replaced. They are designed to protect external wiring if the module outputs are shorted.
Therefore, output modules may not be protected from a short circuit.
If an output module becomes faulty due to any cause other than a short circuit, its fuse may not function.

(4) The number of signals, which can be turned ON simultaneously in an input module, varies according to the input voltage and ambient temperature.
Refer to the corresponding input module specifications.

1

(5) The following chart shows the service life of a relay output module.
Applicable module: QY10, QY18A

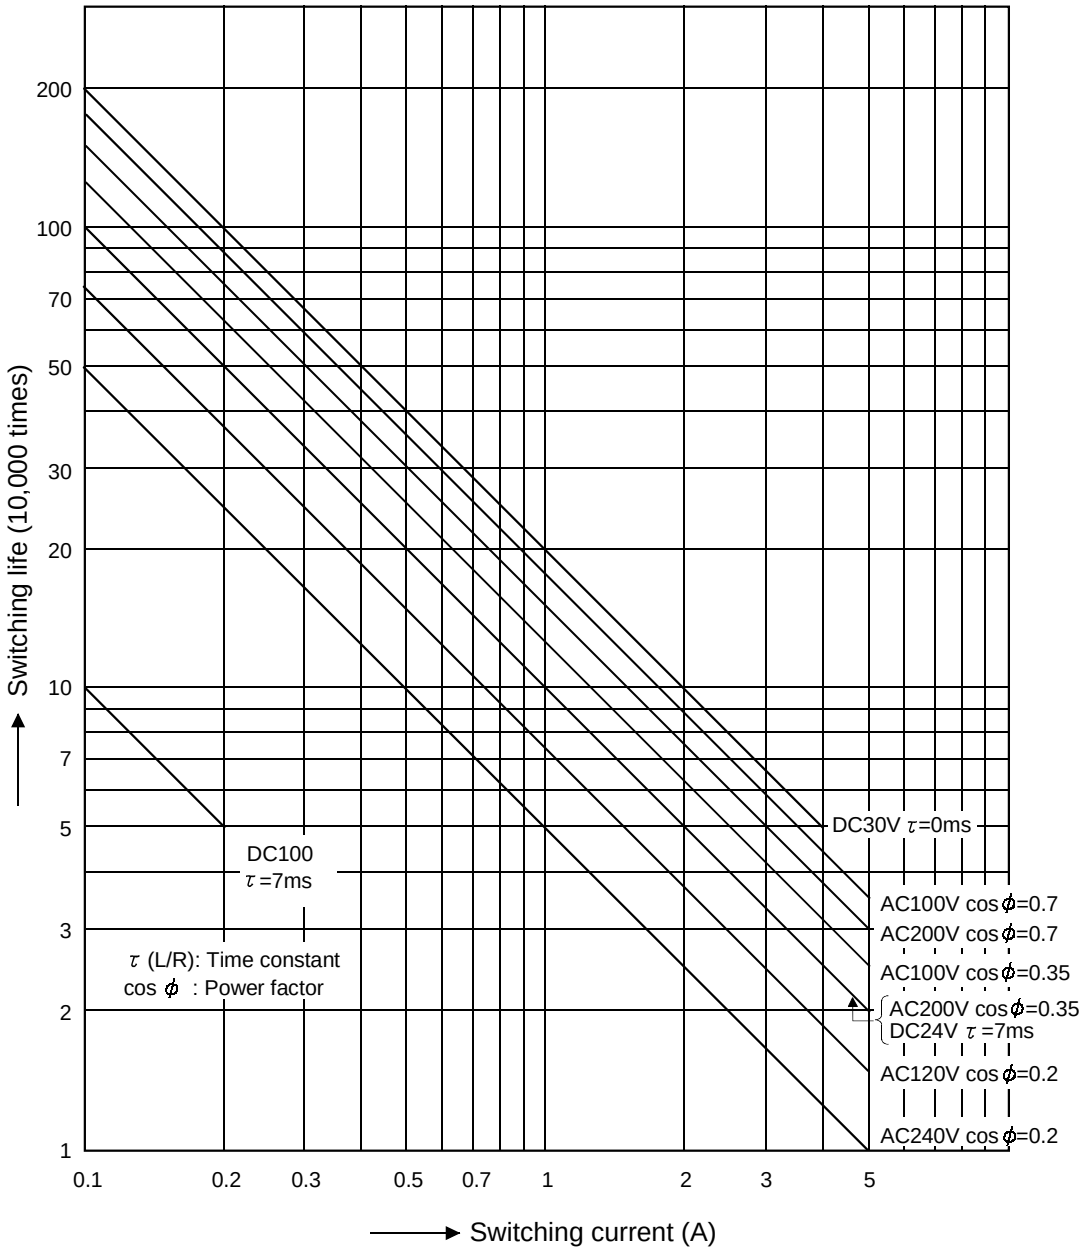

1 - 2

POINT

(1) When using the module for the application in which the relay contact is frequently switched, the relay life span should be considered. Therefore, it is recommended to use a triac output module.

(2) The relay life curve shows the value based on actual use, which is not guaranteed. Therefore, make sure to allow for a margin of error.
The relay life span differs according to the specifications as follows:

Rated switching voltage, current load	
200V AC 1.5A, 240V AC 1A (COS ϕ =0.7)	100 thousand operations
200V AC 0.4A, 240V AC 0.3A (COS ϕ =0.7)	300 thousand operations
200V AC 1A, 240V AC 0.5A (COS ϕ =0.35)	100 thousand operations
200V AC 0.3A, 240V AC 0.15A (COS ϕ =0.35)	300 thousand operations
24V DC 1A, 100V DC 0.1A (L/R=7ms)	100 thousand operations
24V DC 0.3A, 100V DC 0.03A (L/R=7ms)	300 thousand operations

(3) Relay life is substantially affected by the load type and inrush current characteristics.
The inrush current may cause the contact welding. Therefore, consideration should be given to it as well as constant current.
(a) Inductive load
When the inductive load such as electromagnetic contactor or solenoid is shut off, high counter-electromotive force is generated between the contacting materials to produce an arc discharge. Consideration should be made especially when the power factor is low, as it may decrease the life period.
In addition, make sure to consider the contact melting, as the inrush current equivalent to 5 to 15 times of constant current flows when the module is powered on.
(b) Lamp load
Make sure to consider the contact melting, as the inrush current equivalent to 10 to 15 times of constant current flows in the lamp circuit.
(c) Capacitive load
Make sure to consider the contact melting when a device such as condenser is used in a load circuit, as the inrush current equivalent to 20 to 40 times of constant current may flow in the circuit.
Also, pay full attention to the wire capacity if long length of wire is routed.

(6) Insulation-sleeved crimping terminals cannot be used with the terminal block.
It is recommended to cover the wire connections of the crimping terminals with mark or insulation tubes.

(7) Use wires of 0.3 to 0.75mm^2 core and 2.8mm (0.11in.) OD max. to connect to the terminal block.

(8) Do not use I/O modules under pressure higher than the atmospheric pressure of 0m (0ft.) altitude. Doing so can cause a malfunction.
When using I/O modules under pressure, please consult your sales representative.

(9) Tighten the module fixing and terminal block screws to the torques in the following ranges.

Screw Location	Tightening Torque Range
Module fixing screw (M3×12 screw)	36 to 48 N•cm
I/O module terminal block screw (M3 screw)	42 to 58 N•cm
I/O module terminal block mounting screw (M3 screw)	66 to 89 N•cm

(10)There are the following restrictions on the thermal protections activated by protected output modules.
The thermal protections are overload and overheat protective functions.
(a) QY40P, QY41P, QY42P, QH42P

Function	Description
Common (Overload and overheat protective functions)	• If an overcurrent keeps flowing due to overload, heat is generated to activate the overheat protective function. • Each protective function is designed to protect the internal elements of the module, not the external equipment.
Overload protective function	• The overload protective function is activated in 1 point increments in terms of 1A to 3A/point. • The overload protective function returns operation to normal when the load becomes a rated load
Overheat protective function	• The overheat protective function is activated in 1 point increments. • The overheat protective function automatically returns operation to normal when heat reduces.

(b) QY81P

Function	Description
Common (Overload and overheat protective functions)	• If an overcurrent keeps flowing due to overload, heat is generated to activate the overheat protective function. • Each protective function is designed to protect the internal elements of the module, not the external equipment.
Overload protective function	• The overload protective function is activated in 1 point increments in terms of 1A to 3A/point. • The overload protective function returns operation to normal when the load becomes a rated load.
Overheat protective function	• The overheat protective function is activated in 2 point increments. (It is activated in 2 point increments of Y0/Y1, Y2/Y3, ..., and when overheat protection is activated, that of 2 points is activated simultaneously. If an overheat condition persists, heat transferred may activate the other overheat protective function.) • If an output turns ON at the activation of the overheat protective function, the actual output voltage oscillates between 0V and load voltage. At the load voltage of 24V, the average voltage during oscillation is approx. 7V. No oscillation is encountered when the output is OFF at the activation of the overheat protective function. To ensure that the output is turned OFF at the activation of the overheat protective function, use an external load which switches OFF at 7V or more. • The overheat protective function automatically returns operation to normal when heat reduces.

(11)Input modules may import noise or the like as an input depending on the pulse width of a signal.
This pulse width has a value as listed below depending on the parameter-set response time. The operating environment should be fully considered when making the response time setting.

Response Time Setting (ms)	Minimum Value of Pulse Width That May Be Imported (ms)
1	0.3
5	3
10	6
20	12
70	45

(12)When confirming the product information on the CPU PLC, observe the system monitor in the DIAGNOSIS menu of the GX Developer.

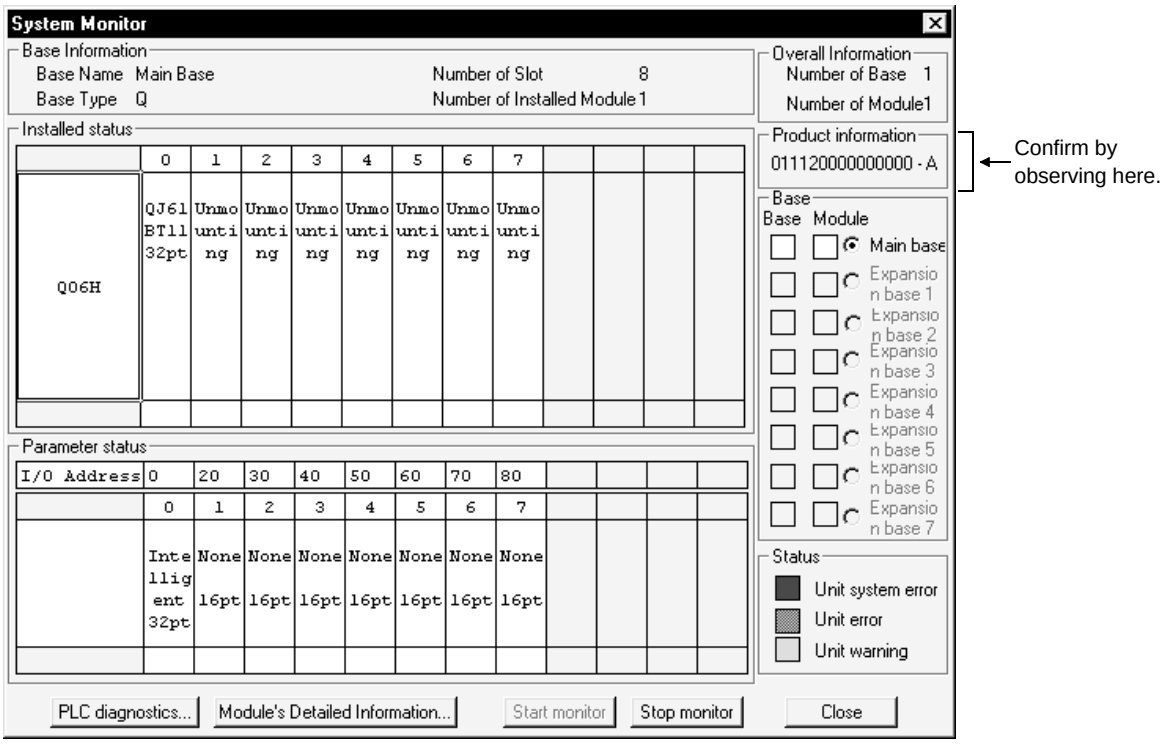

(13)When using the QH42P or QX48Y57, configure it with the following devices.

Part name	Detail
CPU PLC	Product of product information [011120000000000-A] or later
GX Developer	SW5D5C-GPPW or later

The CPU PLCs other than those listed above cannot be used.
When the SW4D5C-GPPW is used, the response time cannot be set (fixed at 10ms).
Set OUTPUT for the I/O allocation.

(14)Instructions for use of QY22

It is recommended to fit a fuse to each external terminal in order to prevent the external device and module from being burnt if a load short-circuit occurs.
The fuse recommended for fitting is the one conforming to IEC60127 Sheet 1.
The following fuses have been confirmed by Mitsubishi to operate properly.

Fuse Model	216 02.5	216 002
Rated current	2.5A	2A
Manufacturer	Littelfuse, Inc	

(15) Caution points when using QY68A

Installing a fuse to the external terminal to prevent burn out of external devices and modules in the case of a load short is recommended.

A rated voltage 3A fast type fuse is recommended.

Fuses confirmed for operation by this company are listed below.

Fuse Model	216 3.15	312 003
Rated current	3.15A	3A
Manufacturer	Littelfuse, Inc	

(16) Possible constructions for QI60 compatible time settings

When setting compatible times for QI60, use the constructions listed below.

If using other constructions, compatible times can not be set. (Fixed at 0.2 ms)

Product name	Contents
PLC CPU	Product information "021120000000000-B" or later
GX Developer	SW6D5C-GPPW or later

1.3 How to Make Settings on GX Developer

This section describes how to make settings using GX Developer.

1.3.1 Setting of I/O response time

Set the I/O response time in I/O assignment of PLC Parameter.

(1) For Input/I/O mix module
Choose [Input/I/O mix] in Type, choose [Detailed setting], and choose [I/O response time] in I/O response time.

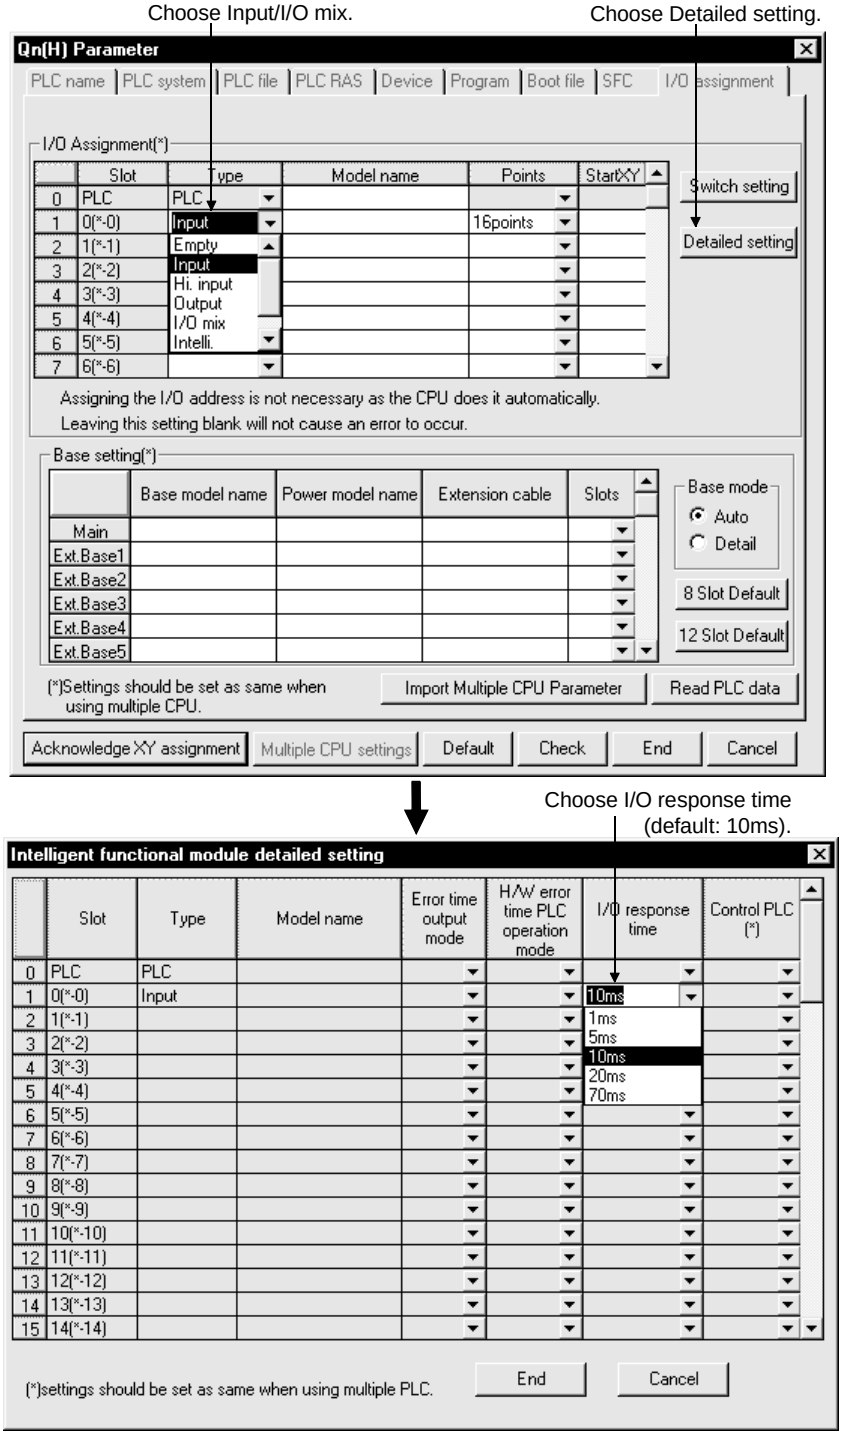

(2) For high-speed input module/QI60

Choose [Hi. input/Interrupt] in Type, choose [Detailed setting], and choose [I/O response time] in I/O response time.

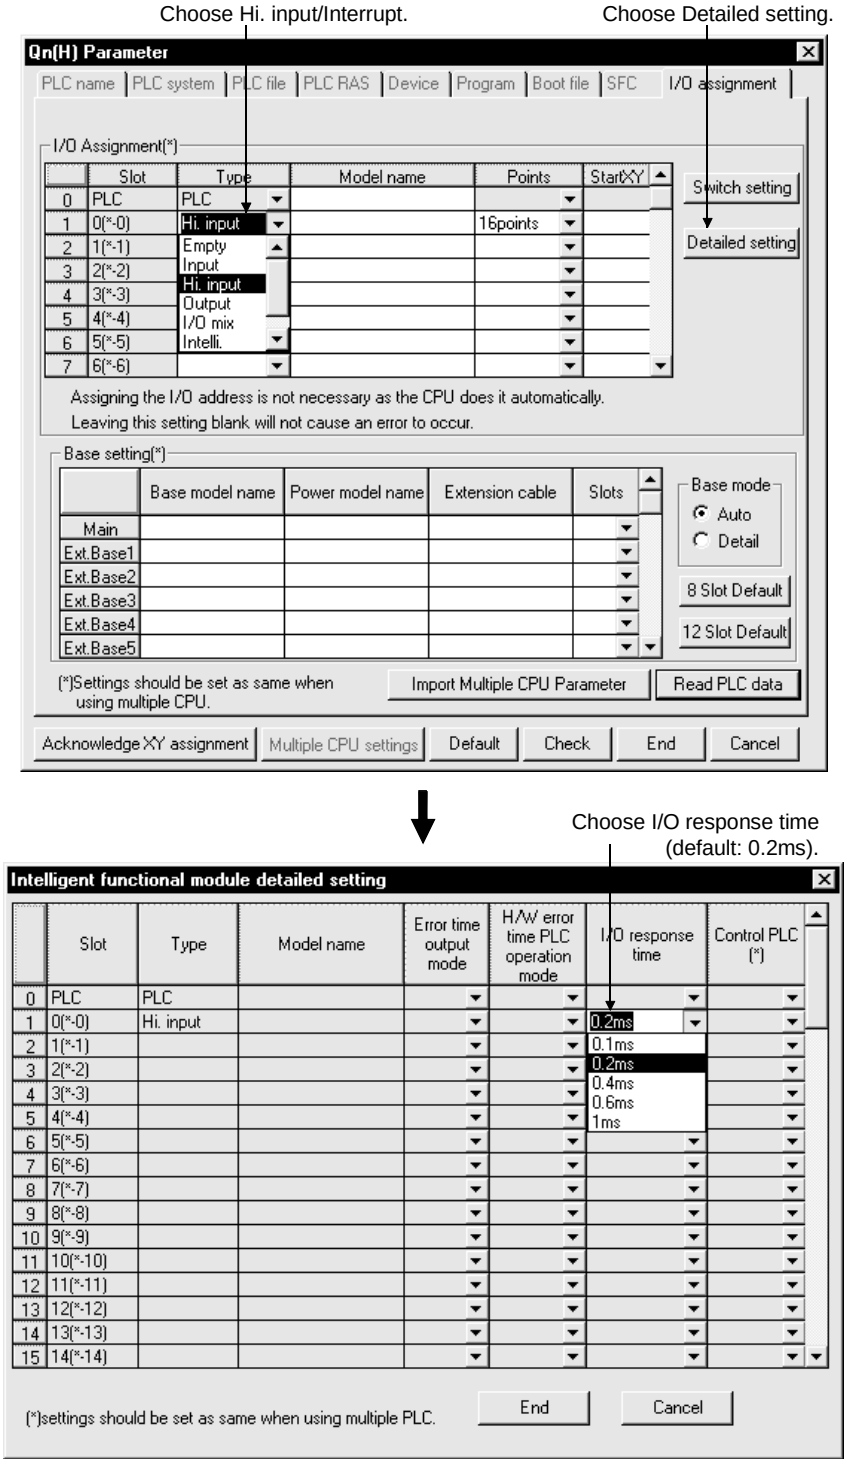

1 - 9

1.3.2 Setting of error-time output mode

Set the error-time output mode in I/O assignment of PLC Parameter.
Choose [Output/I/O mix] in Type, choose [Detailed setting], and choose [Clear/Hold] in Error time output mode.

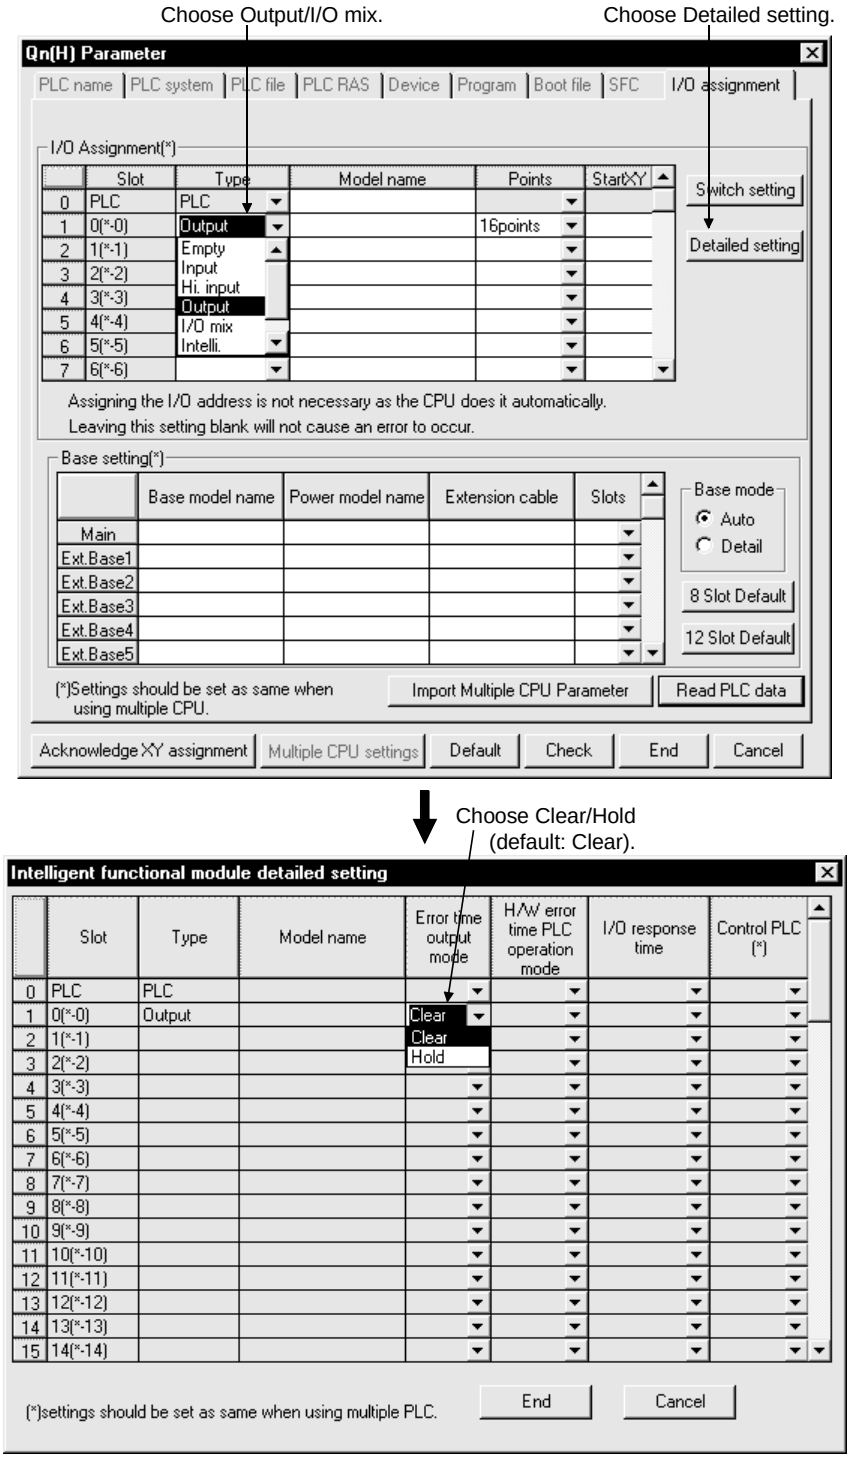

1.3.3 QI60 switch setting

Set the QI60 switches in I/O assignment of PLC Parameter.
Choose [Interrupt] in Type, choose [Switch setting], choose [HEX.] in Input format, and set the interrupt processing conditions in Switch 1.

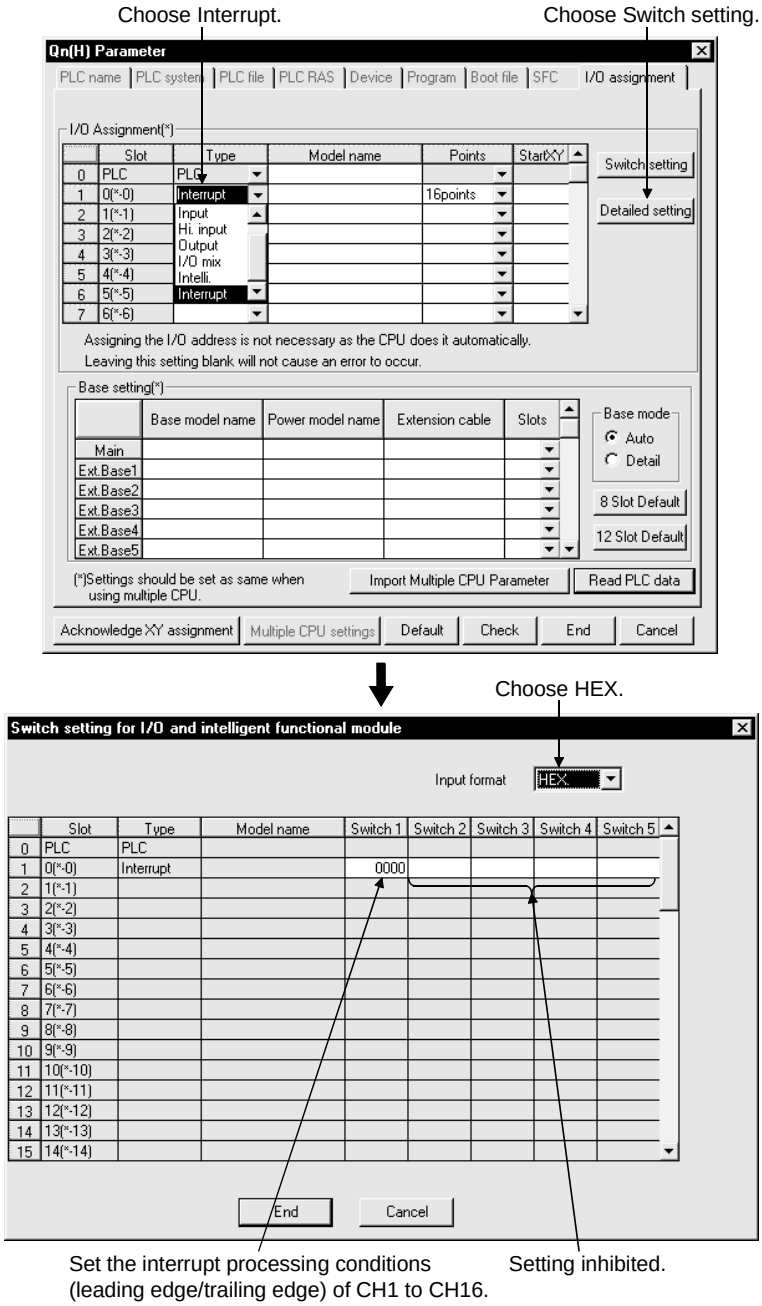

Set the interrupt processing condition with switch 1. The relationships between bits and inputs are as indicated below.

b15							to								b0
X15	X14	X13	X12	X11	X10	X9	X8	X7	X6	X5	X4	X3	X2	X1	X0

0: Leading edge, 1: Trailing edge

MEMO

1 - 12

2. INPUT MODULE SPECIFICATIONS

2.1 QX10 AC Input Module

Specifications \ Type		AC Input Module	
		QX10	Appearance
Number of input points		16 points	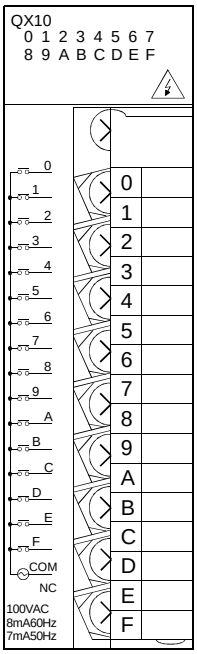
Isolation method		Photocoupler	
Rated input voltage, frequency		100-120VAC (+10/-15%) 50/60Hz (±3Hz) (distortion factor within 5%)	
Rated input current		Approx. 8mA (100VAC, 60Hz), approx. 7mA (100VAC, 50Hz)	
Input derating		Refer to the derating chart.	
Inrush current		Max. 200mA within 1ms (at 132VAC)	
ON voltage/ON current		80VAC or higher/5mA or higher (50Hz, 60Hz)	
OFF voltage/OFF current		30VAC or lower/1.7mA or lower (50Hz, 60Hz)	
Input impedance		Approx. 12kΩ (60Hz), approx. 15kΩ (50Hz)	
Response time	OFF to ON	15ms or less (100VAC 50Hz, 60Hz)	
	ON to OFF	20ms or less (100VAC 50Hz, 60Hz)	
Dielectric withstand voltage		1780VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 1500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP1X	
Common terminal arrangement		16 points/common (common terminal: TB17)	
Number of I/O points		16 (I/O allocation is set as a 16-points input module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		50mA (TYP. all points ON)	
Weight		0.17kg	

Derating Chart
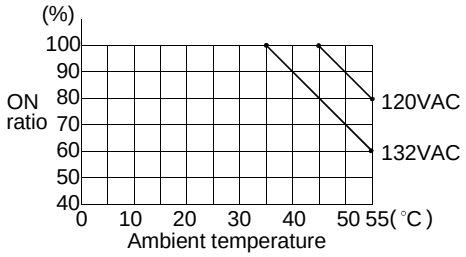
External Connections
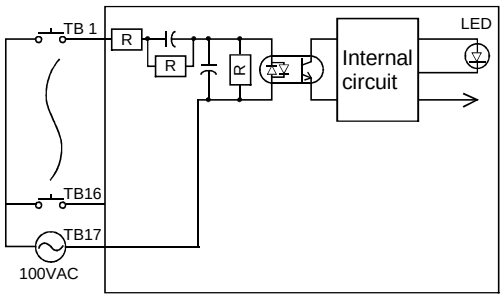

Terminal Block Number	Signal Name
TB1	X00
TB2	X01
TB3	X02
TB4	X03
TB5	X04
TB6	X05
TB7	X06
TB8	X07
TB9	X08
TB10	X09
TB11	X0A
TB12	X0B
TB13	X0C
TB14	X0D
TB15	X0E
TB16	X0F
TB17	COM
TB18	Vacant

2.2 QX28 AC Input Module

Specifications \ Type		AC Input Module QX28	Appearance
Number of input points		8 points	
Isolation method		Photocoupler	
Rated input voltage, frequency		100-240VAC (+10/-15%) 50/60Hz (±3Hz) (distortion factor within 5%)	
Rated input current		Approx. 17mA (200VAC, 60Hz), approx. 14mA (200VAC, 50Hz) Approx. 8mA (100VAC, 60Hz), approx. 7mA (100VAC, 50Hz)	
Input derating		Refer to the derating chart.	
Inrush current		Max. 500mA within 1ms (at 264VAC)	
ON voltage/ON current		80VAC or higher/5mA or higher (50Hz, 60Hz)	
OFF voltage/OFF current		30VAC or lower/1.7mA or lower (50Hz, 60Hz)	
Input impedance		Approx. 12kΩ (60Hz), approx. 15kΩ (50Hz)	
Response time	OFF to ON	10ms or less (100VAC 50Hz, 60Hz)	
	ON to OFF	20ms or less (100VAC 50Hz, 60Hz)	
Dielectric withstand voltage		2830VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 1500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP1X	
Common terminal arrangement		8 points/common (common terminal: TB17)	
Number of I/O points		16 (I/O allocation is set as a 16-points input module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		50mA (TYP. all points ON)	
Weight		0.20kg	

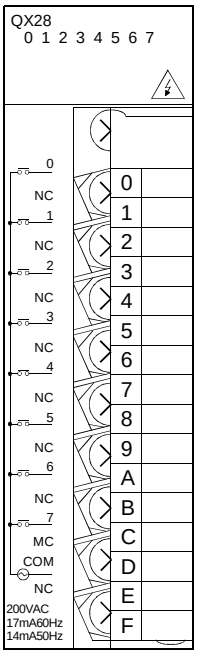

Derating Chart

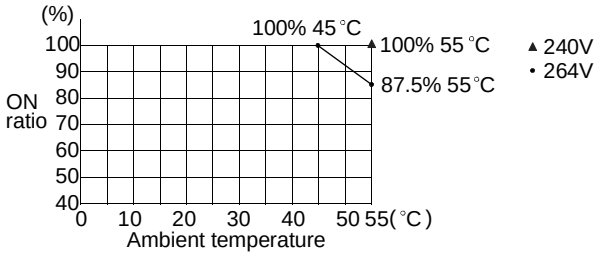

External Connections

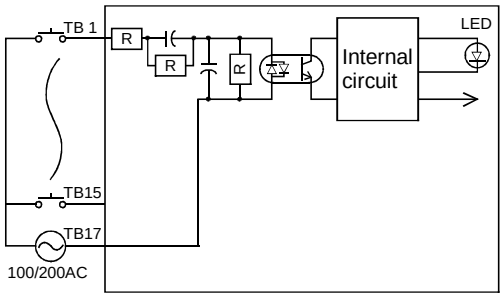

Terminal Block Number	Signal Name
TB1	X00
TB2	Vacant
TB3	X01
TB4	Vacant
TB5	X02
TB6	Vacant
TB7	X03
TB8	Vacant
TB9	X04
TB10	Vacant
TB11	X05
TB12	Vacant
TB13	X06
TB14	Vacant
TB15	X07
TB16	Vacant
TB17	COM
TB18	Vacant

2.3 QX40 DC Input Module (Positive Common Type)

Specifications \ Type		DC Input Module (Positive Common Type) QX40	Appearance
Number of input points		16 points	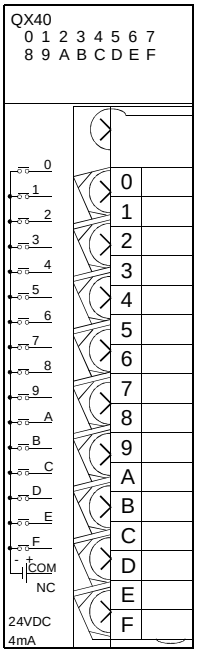
Isolation method		Photocoupler	
Rated input voltage		24VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 4mA	
Input derating		No	
ON voltage/ON current		19V or higher/3mA or higher	
OFF voltage/OFF current		11V or lower/1.7mA or lower	
Input impedance		Approx. 5.6kΩ	
Response time	OFF to ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗ Initial setting is 10ms.	
	ON to OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗ Initial setting is 10ms.	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		16 points/common (common terminal: TB17)	
Number of I/O points		16 (I/O allocation is set as a 16-points input module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		50mA (TYP. all points ON)	
Weight		0.16kg	

External Connections	Terminal Block Number	Signal Name
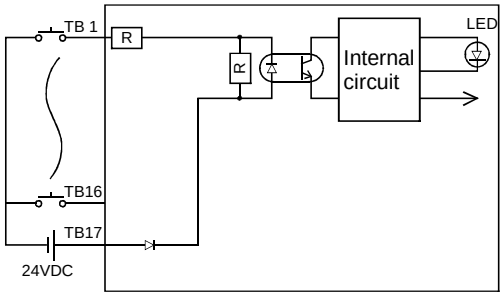	TB1	X00
	TB2	X01
	TB3	X02
	TB4	X03
	TB5	X04
	TB6	X05
	TB7	X06
	TB8	X07
	TB9	X08
	TB10	X09
	TB11	X0A
	TB12	X0B
	TB13	X0C
	TB14	X0D
	TB15	X0E
	TB16	X0F
	TB17	COM
	TB18	Vacant

∗: For the setting method, refer to the section 1.3.1.

2.4 QX40-S1 DC Input Module (Positive Common Type)

Specifications \ Type			DC Input Module (Positive Common Type) QX40-S1					Appearance
Number of input points			16 points					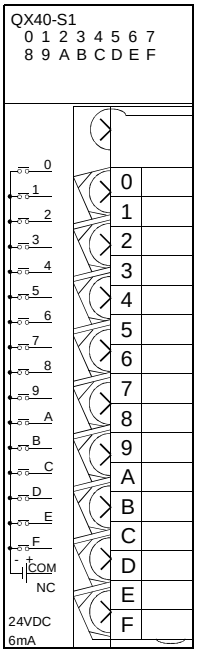
Isolation method			Photocoupler					
Rated input voltage			24VDC (+20/-15%, ripple ratio within 5%)					
Rated input current			Approx. 6mA					
Input derating			No					
ON voltage/ON current			19V or higher/4.0mA or higher					
OFF voltage/OFF current			11V or lower/1.7mA or lower					
Input impedance			Approx. 3.9kΩ					
Response time	Set value ＊1		0.1	0.2	0.4	0.6	1	
	OFF to ON	Typ	0.05ms	0.15ms	0.30ms	0.55ms	1.05ms	
		max	0.10ms	0.20ms	0.40ms	0.60ms	1.20ms	
	ON to OFF	Typ	0.15ms	0.20ms	0.35ms	0.60ms	1.10ms	
		max	0.20ms	0.30ms	0.50ms	0.70ms	1.30ms	
Dielectric withstand voltage			560VAC rms/3 cycles (altitude 2000m (6557.38ft.))					
Insulation resistance			10MΩ or more by insulation resistance tester					
Noise immunity			By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency					
			First transient noise IEC61000-4-4: 1kV					
Protection of degree			IP2X					
Common terminal arrangement			16 points/common (common terminal: TB17)					
Number of I/O points			16 (I/O allocation is set as a 16-points Hi. input module)					
Operation indicator			ON indication (LED)					
External connections			18-point terminal block (M3×6 screws)					
Applicable wire size			0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)					
Applicable crimping terminal			R1.25-3 (sleeved crimping terminals cannot be used.)					
5VDC internal current consumption			60mA (TYP. all points ON)					
Weight			0.20kg					

External Connections	Terminal Block Number	Signal Name
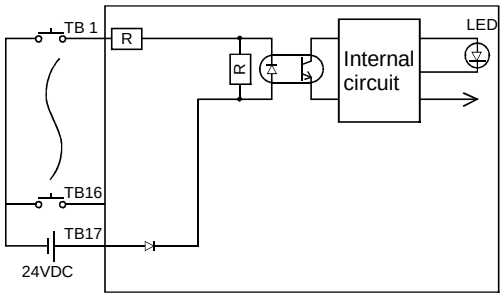	TB1	X00
	TB2	X01
	TB3	X02
	TB4	X03
	TB5	X04
	TB6	X05
	TB7	X06
	TB8	X07
	TB9	X08
	TB10	X09
	TB11	X0A
	TB12	X0B
	TB13	X0C
	TB14	X0D
	TB15	X0E
	TB16	X0F
	TB17	COM
	TB18	Vacant

＊1: CPU parameter setting. (Initial setting is 0.2ms)
Response time can be changed on SW5D5C-GPPW or later.
For the setting method, refer to the section 1.3.1.

2.5 QX41 DC Input Module (Positive Common Type)

Specifications \ Type		DC Input Module (Positive Common Type) QX41	Appearance
Number of input points		32 points	
Isolation method		Photocoupler	
Rated input voltage		24VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 4mA	
Input derating		Refer to the derating chart.	
ON voltage/ON current		19V or higher/3mA or higher	
OFF voltage/OFF current		11V or lower/1.7mA or lower	
Input impedance		Approx. 5.6kΩ	
Response time	OFF to ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms.	
	ON to OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms.	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		32 points/common (common terminal: B01, B02)	
Number of I/O points		32 (I/O allocation is set as a 32-points input module)	
Operation indicator		ON indication (LED)	
External connections		40-pin connector	
Applicable wire size		0.3mm^2 (For A6CON1 or A6CON4) ∗2	
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)	
Applicable connector/terminal block conversion module		A6TBXY36, A6TBXY54, A6TBX70	
5VDC internal current consumption		75mA (TYP. all points ON)	
Weight		0.15kg	

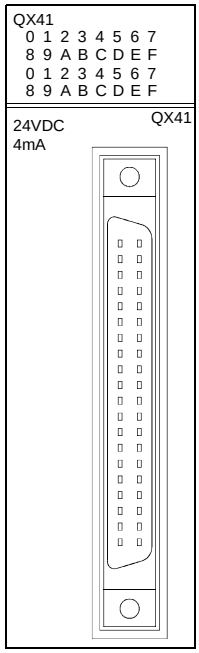

Derating Chart

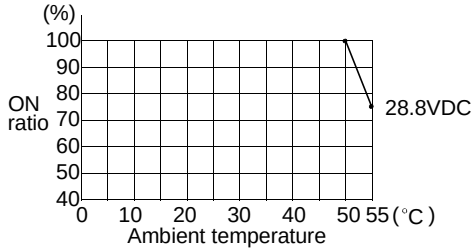

External Connections

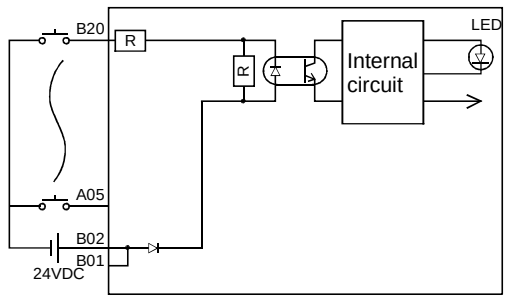

Pin-Outs

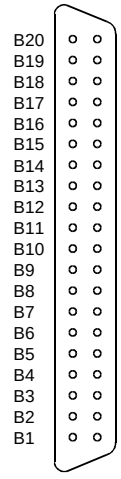

Module front view

Pin No.	Signal No.	Pin No.	Signal No.
B20	X00	A20	X10
B19	X01	A19	X11
B18	X02	A18	X12
B17	X03	A17	X13
B16	X04	A16	X14
B15	X05	A15	X15
B14	X06	A14	X16
B13	X07	A13	X17
B12	X08	A12	X18
B11	X09	A11	X19
B10	X0A	A10	X1A
B09	X0B	A09	X1B
B08	X0C	A08	X1C
B07	X0D	A07	X1D
B06	X0E	A06	X1E
B05	X0F	A05	X1F
B04	Vacant	A04	Vacant
B03	Vacant	A03	Vacant
B02	COM	A02	Vacant
B01	COM	A01	Vacant

∗1: For the setting method, refer to the section 1.3.1.

∗2: When using A6CON2 or A6CON3, refer to Chapter 7.

2.6 QX41-S1 DC Input Module (Positive Common Type)

Specifications \ Type			DC Input Module (Positive Common Type)				
			QX41-S1				Appearance
Number of input points			32 points				
Isolation method			Photocoupler				
Rated input voltage			24VDC (+20/-15%, ripple ratio within 5%)				
Rated input current			Approx. 4mA				
Input derating			Refer to the derating chart.				
ON voltage/ON current			19V or higher/3.0mA or higher				
OFF voltage/OFF current			9.5V or lower/1.5mA or lower				
Input impedance			Approx. 5.6kΩ				
Response time	Set value ∗1		0.1	0.2	0.4	0.6	1
	OFF to ON	Typ	0.05ms	0.15ms	0.30ms	0.55ms	1.05ms
		max	0.12ms	0.20ms	0.40ms	0.60ms	1.20ms
	ON to OFF	Typ	0.15ms	0.20ms	0.35ms	0.60ms	1.10ms
		max	0.20ms	0.30ms	0.50ms	0.70ms	1.30ms
Dielectric withstand voltage			560VAC rms/3 cycles (altitude 2000m (6557.38ft.))				
Insulation resistance			10MΩ or more by insulation resistance tester				
Noise immunity			By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency				
			First transient noise IEC61000-4-4: 1kV				
Protection of degree			IP2X				
Common terminal arrangement			32 points/common (common terminal: B01, B02)				
Number of I/O points			32 (I/O allocation is set as a 32-points Hi. input module)				
Operation indicator			ON indication (LED)				
External connections			40-pin connector				
Applicable wire size			0.3mm^2 (For A6CON1 or A6CON4) ∗2				
External wiring connector			A6CON1, A6CON2, A6CON3, A6CON4 (optional)				
Applicable connector/terminal block conversion module			A6TBXY36, A6TBXY54, A6TBX70				
5VDC internal current consumption			75mA (TYP. all points ON)				
Weight			0.15kg				

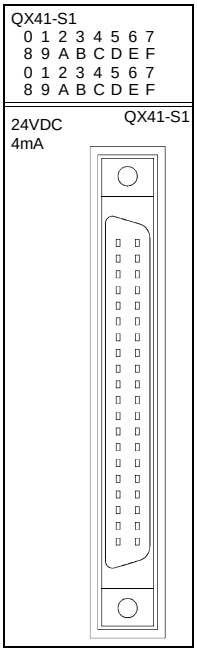

∗1: CPU parameter setting. (Initial setting is 0.2ms)
Response time can be changed on SW5D5C-GPPW or later.
For the setting method, refer to the section 1.3.1.

∗2: When using A6CON2 or A6CON3, refer to Chapter 7.

Derating Chart

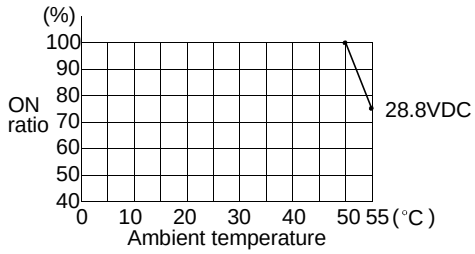

External Connections

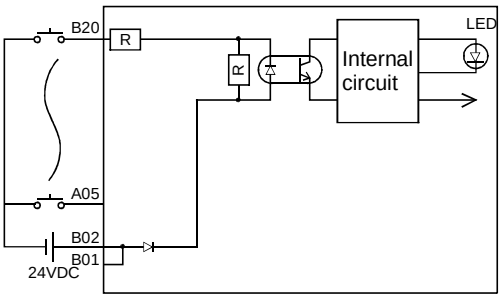

Pin-Outs

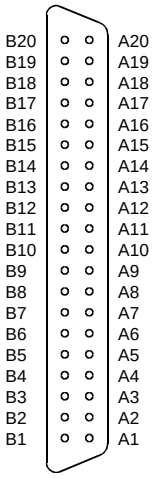

Module front view

Pin No.	Signal No.	Pin No.	Signal No.
B20	X00	A20	X10
B19	X01	A19	X11
B18	X02	A18	X12
B17	X03	A17	X13
B16	X04	A16	X14
B15	X05	A15	X15
B14	X06	A14	X16
B13	X07	A13	X17
B12	X08	A12	X18
B11	X09	A11	X19
B10	X0A	A10	X1A
B09	X0B	A09	X1B
B08	X0C	A08	X1C
B07	X0D	A07	X1D
B06	X0E	A06	X1E
B05	X0F	A05	X1F
B04	Vacant	A04	Vacant
B03	Vacant	A03	Vacant
B02	COM	A02	Vacant
B01	COM	A01	Vacant

2.7 QX42 DC Input Module (Positive Common Type)

Specifications \ Type		DC Input Module (Positive Common Type) QX42	Appearance
Number of input points		64 points	
Isolation method		Photocoupler	
Rated input voltage		24VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 4mA	
Input derating		Refer to the derating chart.	
ON voltage/ON current		19V or higher/3mA or higher	
OFF voltage/OFF current		11V or lower/1.7mA or lower	
Input impedance		Approx. 5.6kΩ	
Response time	OFF to ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms.	
	ON to OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms.	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		32 points/common (common terminal: 1B01, 1B02, 2B01, 2B02)	
Number of I/O points		64 (I/O allocation is set as a 32-points input module)	
Operation indicator		ON indication (LED), 32 point switch-over using switch	
External connections		40-pin connector	
Applicable wire size		0.3mm^2 (For A6CON1 or A6CON4) ∗4	
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)	
Applicable connector/terminal block conversion module		A6TBXY36, A6TBXY54, A6TBX70	
5VDC internal current consumption		90mA (TYP. all points ON)	
Weight		0.18kg	

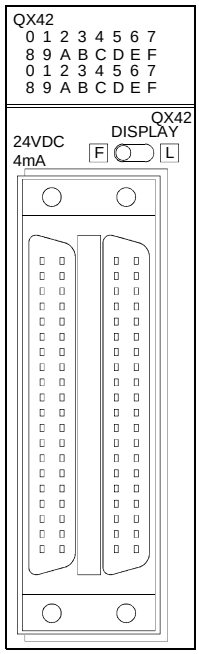

Derating Chart

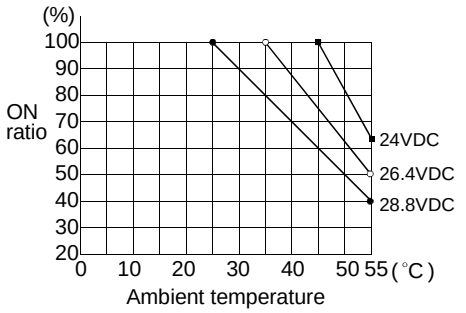

External Connections

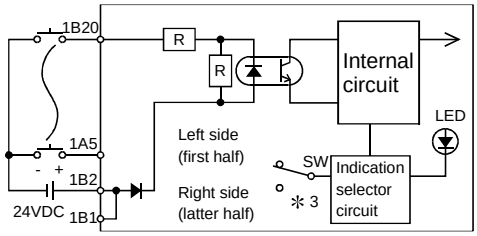

The above diagram shows the first half of 32 points (F).
The latter half of 32 points (L) are similar.

Pin-Outs



Module front view

Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.
1B20	X00	1A20	X10	2B20	X20	2A20	X30
1B19	X01	1A19	X11	2B19	X21	2A19	X31
1B18	X02	1A18	X12	2B18	X22	2A18	X32
1B17	X03	1A17	X13	2B17	X23	2A17	X33
1B16	X04	1A16	X14	2B16	X24	2A16	X34
1B15	X05	1A15	X15	2B15	X25	2A15	X35
1B14	X06	1A14	X16	2B14	X26	2A14	X36
1B13	X07	1A13	X17	2B13	X27	2A13	X37
1B12	X08	1A12	X18	2B12	X28	2A12	X38
1B11	X09	1A11	X19	2B11	X29	2A11	X39
1B10	X0A	1A10	X1A	2B10	X2A	2A10	X3A
1B09	X0B	1A09	X1B	2B09	X2B	2A09	X3B
1B08	X0C	1A08	X1C	2B08	X2C	2A08	X3C
1B07	X0D	1A07	X1D	2B07	X2D	2A07	X3D
1B06	X0E	1A06	X1E	2B06	X2E	2A06	X3E
1B05	X0F	1A05	X1F	2B05	X2F	2A05	X3F
1B04	Vacant	1A04	Vacant	2B04	Vacant	2A04	Vacant
1B03	Vacant	1A03	Vacant	2B03	Vacant	2A03	Vacant
1B02	COM	1A02	Vacant	2B02	COM2	2A02	Vacant
1B01	COM	1A01	Vacant	2B01	COM2	2A01	Vacant

∗1: For the setting method, refer to the section 1.3.1.
∗2: Pin number of 1□□□ indicates that of the left-hand side connector, and pin number of 2□□□ indicates that of the right-hand side connector.
∗3: Selection of left-hand (F) side provides the first half (X00 to X1F) LED indications, and selection of right-hand (L) side provides the latter half (X20 to X3F) LED indications.
∗4: When using A6CON2 or A6CON3, refer to Chapter 7.

2.8 QX42-S1 DC Input Module (Positive Common Type)

Specifications \ Type			DC Input Module (Positive Common Type)				
			QX42-S1				Appearance
Number of input points			64 points				
Isolation method			Photocoupler				
Rated input voltage			24VDC (+20/-15%, ripple ratio within 5%)				
Rated input current			Approx. 4mA				
Input derating			Refer to the derating chart.				
ON voltage/ON current			19V or higher/3.0mA or higher				
OFF voltage/OFF current			9.5V or lower/1.5mA or lower				
Input impedance			Approx. 5.6kΩ				
Response time	Set value ∗1		0.1	0.2	0.4	0.6	1
	OFF to ON	Typ	0.05ms	0.15ms	0.30ms	0.55ms	1.05ms
		max	0.12ms	0.20ms	0.40ms	0.60ms	1.20ms
	ON to OFF	Typ	0.15ms	0.20ms	0.35ms	0.60ms	1.10ms
		max	0.20ms	0.30ms	0.50ms	0.70ms	1.30ms
Dielectric withstand voltage			560VAC rms/3 cycles (altitude 2000m (6557.38ft.))				
Insulation resistance			10MΩ or more by insulation resistance tester				
Noise immunity			By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency				
			First transient noise IEC61000-4-4: 1kV				
Protection of degree			IP2X				
Common terminal arrangement			32 points/common (common terminal: 1B01, 1B02, 2B01, 2B02)				
Number of I/O points			64 (I/O allocation is set as a 64-points Hi. input module)				
Operation indicator			ON indication (LED)				
External connections			40-pin connector				
Applicable wire size			$0.3mm^2$ (For A6CON1 or A6CON4) ∗4				
External wiring connector			A6CON1, A6CON2, A6CON3, A6CON4 (optional)				
Applicable connector/terminal block conversion module			A6TBXY36, A6TBXY54, A6TBX70				
5VDC internal current consumption			90mA (TYP. all points ON)				
Weight			0.18kg				

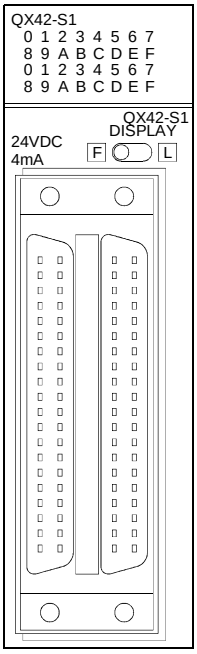

∗1: CPU parameter setting. (Initial setting is 0.2ms)
Response time can be changed on SW5D5C-GPPW or later.
For the setting method, refer to the section 1.3.1.

∗2: Pin number of 1 □ □ □ indicates that of the left-hand side connector, and pin number of 2 □ □ □ indicates that of the right-hand side connector.

∗3: Selection of left-hand (F) side provides the first half (X00 to X1F) LED indications, and selection of right-hand (L) side provides the latter half (X20 to X3F) LED indications.

∗4: When using A6CON2 or A6CON3, refer to Chapter 7.

Derating Chart

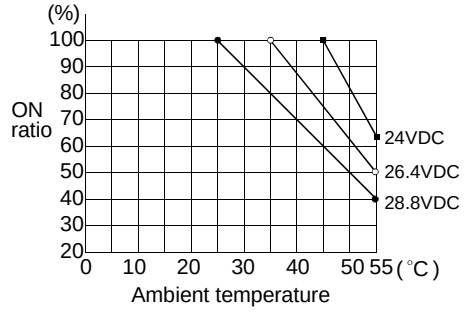

External Connections

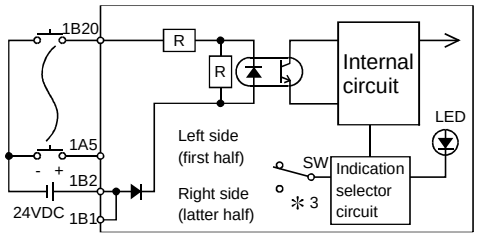

The above diagram shows the first half of 32 points (F).
The latter half of 32 points (L) are similar.

Pin-Outs

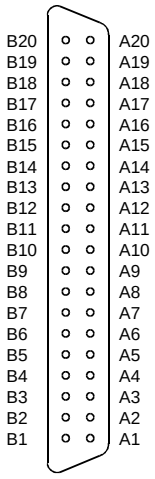

Module front view

Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.
1B20	X00	1A20	X10	2B20	X20	2A20	X30
1B19	X01	1A19	X11	2B19	X21	2A19	X31
1B18	X02	1A18	X12	2B18	X22	2A18	X32
1B17	X03	1A17	X13	2B17	X23	2A17	X33
1B16	X04	1A16	X14	2B16	X24	2A16	X34
1B15	X05	1A15	X15	2B15	X25	2A15	X35
1B14	X06	1A14	X16	2B14	X26	2A14	X36
1B13	X07	1A13	X17	2B13	X27	2A13	X37
1B12	X08	1A12	X18	2B12	X28	2A12	X38
1B11	X09	1A11	X19	2B11	X29	2A11	X39
1B10	X0A	1A10	X1A	2B10	X2A	2A10	X3A
1B09	X0B	1A09	X1B	2B09	X2B	2A09	X3B
1B08	X0C	1A08	X1C	2B08	X2C	2A08	X3C
1B07	X0D	1A07	X1D	2B07	X2D	2A07	X3D
1B06	X0E	1A06	X1E	2B06	X2E	2A06	X3E
1B05	X0F	1A05	X1F	2B05	X2F	2A05	X3F
1B04	Vacant	1A04	Vacant	2B04	Vacant	2A04	Vacant
1B03	Vacant	1A03	Vacant	2B03	Vacant	2A03	Vacant
1B02	COM	1A02	Vacant	2B02	COM2	2A02	Vacant
1B01	COM	1A01	Vacant	2B01	COM2	2A01	Vacant

2.9 QX70 DC Input Module (Positive Common/Negative Common Shared Type)

Specifications \ Type		DC Input Module (Positive Common/Negative Common Shared Type)	
		QX70	Appearance
Number of input points		16 points	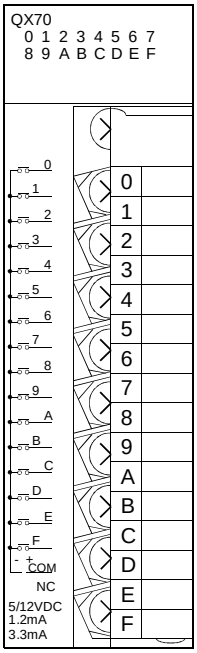
Insulation method		Photocoupler	
Rated input voltage		5VDC (+20/-15%, ripple ratio within 5%)	12VDC (+20/-15%, ripple ratio within 5%)
Rated input current		Approx. 1.2mA	Approx. 3.3mA
Input derating		None	
ON voltage/ON current		3.5V or higher/1mA or higher	
OFF voltage/OFF current		1V or lower/0.1mA or lower	
Input resistance		Approx. 3.3kΩ	
Response time	OFF→ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting)＊ Initial setting is 10ms	
	ON→OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting)＊ Initial setting is 10ms	
Dielectric maximum voltage		560VAC rms/3 cycles (altitude 2000m)	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 0.25kV	
Protection of degree		IP2X	
Common terminal arrangement		16 points/common (common terminal: TB17)	
Number of I/O points		16 (I/O allocation is set as a 16-points input module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screw)	
Applicable wire size		Core cable: 0.3 to 0.75mm^2 (Outside diameter: 2.8mm or smaller)	
Applicable connector terminal		R1.25-3 (Terminals with sleeve cannot be used)	
5VDC internal current consumption		55mA (TYP, all points ON)	
Weight		0.14kg	

External Connections

For open collector (positive common) connection

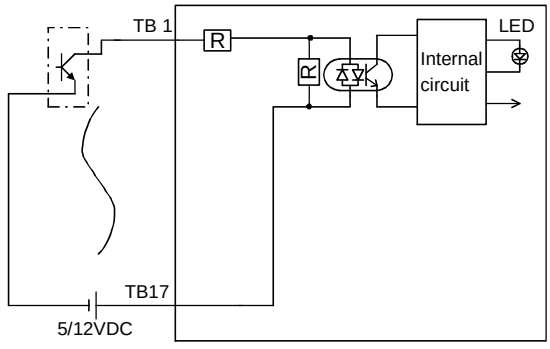

For TTL, LS-TTL, CMOS buffer (positive common) connections



For sensor (negative common) connections



Terminal Block No.	Signal Name
TB1	X00
TB2	X01
TB3	X02
TB4	X03
TB5	X04
TB6	X05
TB7	X06
TB8	X07
TB9	X08
TB10	X09
TB11	X0A
TB12	X0B
TB13	X0C
TB14	X0D
TB15	X0E
TB16	X0F
TB17	COM
TB18	Vacant

＊: For the setting method, refer to the section 1.3.1.

2.10 QX71 DC Input Module (Positive Common/Negative Common Shared Type)

Specifications \ Type		DC Input Module (Positive Common/Negative Common Shared Type)		Appearance
		QX71		
Number of input points		32 points		
Insulation method		Photocoupler		
Rated input voltage		5VDC (+20/-15%, ripple ratio within 5%)	12VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 1.2mA	Approx. 3.3mA	
Input derating		None		
ON voltage/ON current		3.5V or higher/1mA or higher		
OFF voltage/OFF current		1V or lower/0.1mA or lower		
Input resistance		Approx. 3.3kΩ		
Response time	OFF→ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ＊1 Initial setting is 10ms		
	ON→OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ＊1 Initial setting is 10ms		
Dielectric maximum voltage		560VAC rms/3 cycles (altitude 2000m)		
Insulation resistance		10MΩ or more by insulation resistance tester		
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency		
		First transient noise IEC61000-4-4: 0.25kV		
Protection of degree		IP2X		
Common terminal arrangement		32 points/common (common terminal: B01, B02)		
Number of I/O points		32 (I/O allocation is set as a 32-points input module)		
Operation indicator		ON indication (LED)		
External connections		40-pin connector		
Applicable wire size		0.3mm^2 (For A6CON1 or A6CON4) ＊2		
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)		
5VDC internal current consumption		70mA (TYP, all points ON)		
Weight		0.12kg		

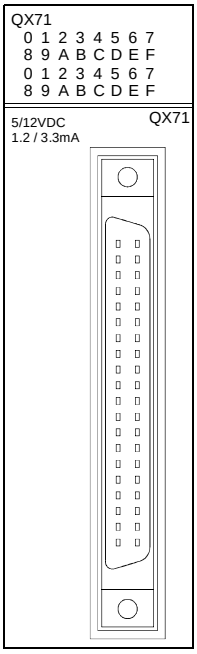

External Connections	Pin-Outs	Pin No.	Signal No.	Pin No.	Signal No.
For open collector (positive common) connection 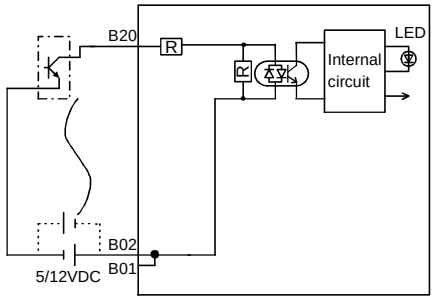 For TTL, LS-TTL, CMOS buffer (positive common) connections  For sensor (negative common) connections 	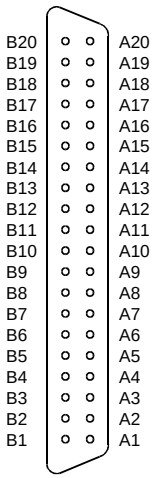 Module front view	B20	X00	A20	X10
		B19	X01	A19	X11
		B18	X02	A18	X12
		B17	X03	A17	X13
		B16	X04	A16	X14
		B15	X05	A15	X15
		B14	X06	A14	X16
		B13	X07	A13	X17
		B12	X08	A12	X18
		B11	X09	A11	X19
		B10	X0A	A10	X1A
		B09	X0B	A09	X1B
		B08	X0C	A08	X1C
		B07	X0D	A07	X1D
		B06	X0E	A06	X1E
		B05	X0F	A05	X1F
		B04	Vacant	A04	Vacant
		B03	Vacant	A03	Vacant
		B02	COM	A02	Vacant
		B01	COM	A01	Vacant

＊1: For the setting method, refer to the section 1.3.1.
＊2: When using A6CON2 or A6CON3, refer to Chapter 7.

2.11 QX72 DC Input Module (Positive Common/Negative Common Shared Type)

Specifications \ Type		DC Input Module (Positive Common/Negative Common Shared Type) QX72		Appearance
Number of input points		64 points		
Insulation method		Photocoupler		
Rated input voltage		5VDC (+20/-15%, ripple ratio within 5%)	12VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 1.2mA	Approx. 3.3mA	
Input derating		None		
ON voltage/ON current		3.5V or higher/3mA or higher		
OFF voltage/OFF current		1V or lower/0.1mA or lower		
Input resistance		Approx. 3.3kΩ		
Response time	OFF→ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms		
	ON→OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms		
Dielectric maximum voltage		560VAC rms/3 cycles (altitude 2000m)		
Insulation resistance		10MΩ or more by insulation resistance tester		
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency		
		First transient noise IEC61000-4-4: 0.25kV		
Protection of degree		IP2X		
Common terminal arrangement		32 points/common (common terminal: 1B01, 1B02, 2B01, 2B02)		
Number of I/O points		64 (I/O allocation is set as a 64-points input module)		
Operation indicator		ON indication (LED), 32-point switchover using switch		
External connections		40-pin connector		
Applicable wire size		$0.3mm^2$ (For A6CON1 or A6CON4) ∗4		
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)		
5VDC internal current consumption		85mA (TYP, all points ON)		
Weight		0.13kg		

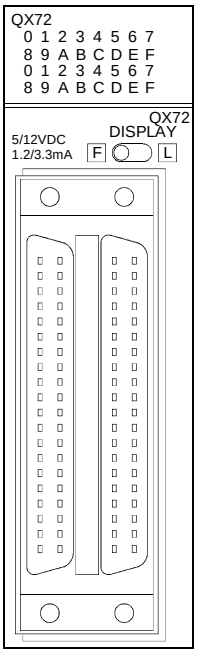

External Connections	Pin-Outs	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.
For open collector (positive common) connection 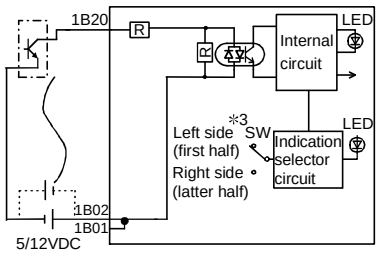 For TTL, LS-TTL, CMOS buffer (positive common) connections  For sensor (negative common) connections  The above diagram shows the first half of 32 points (F). The latter half of 32 points (L) are similar.	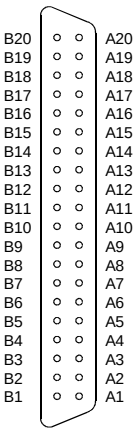 Module front view	1B20	X00	1A20	X10	2B20	X20	2A20	X30
		1B19	X01	1A19	X11	2B19	X21	2A19	X31
		1B18	X02	1A18	X12	2B18	X22	2A18	X32
		1B17	X03	1A17	X13	2B17	X23	2A17	X33
		1B16	X04	1A16	X14	2B16	X24	2A16	X34
		1B15	X05	1A15	X15	2B15	X25	2A15	X35
		1B14	X06	1A14	X16	2B14	X26	2A14	X36
		1B13	X07	1A13	X17	2B13	X27	2A13	X37
		1B12	X08	1A12	X18	2B12	X28	2A12	X38
		1B11	X09	1A11	X19	2B11	X29	2A11	X39
		1B10	X0A	1A10	X1A	2B10	X2A	2A10	X3A
		1B09	X0B	1A09	X1B	2B09	X2B	2A09	X3B
		1B08	X0C	1A08	X1C	2B08	X2C	2A08	X3C
		1B07	X0D	1A07	X1D	2B07	X2D	2A07	X3D
		1B06	X0E	1A06	X1E	2B06	X2E	2A06	X3E
		1B05	X0F	1A05	X1F	2B05	X2F	2A05	X3F
		1B04	Vacant	1A04	Vacant	2B04	Vacant	2A04	Vacant
		1B03	Vacant	1A03	Vacant	2B03	Vacant	2A03	Vacant
		1B02	COM1	1A02	Vacant	2B02	COM2	2A02	Vacant
		1B01	COM1	1A01	Vacant	2B01	COM2	2A01	Vacant

∗1: For the setting method, refer to the section 1.3.1.

∗2: Pin number of 1□ □ □ indicates that of the left-hand side connector, and pin number of 2 □ □ □ indicates that of the right-hand side connector.

∗3: Selection of left-hand (F) side provides the first half (X00 to X1F) LED indications, and selection of right-hand (L) side provides the latter half (X20 to X3F) LED indications.

∗4: When using A6CON2 or A6CON3, refer to Chapter 7.

2.12 QX80 DC Input Module (Negative Common Type)

Specifications \ Type		DC Input Module (Negative Common Type) QX80	Appearance
Number of input points		16 points	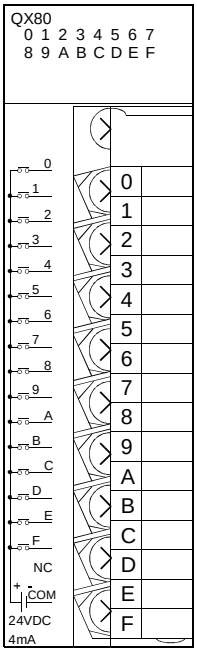
Isolation method		Photocoupler	
Rated input voltage		24VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 4mA	
Input derating		No	
ON voltage/ON current		19V or higher/3mA or higher	
OFF voltage/OFF current		11V or lower/1.7mA or lower	
Input impedance		Approx. 5.6kΩ	
Response time	OFF to ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗ Initial setting is 10ms.	
	ON to OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗ Initial setting is 10ms.	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		16 points/common (common terminal: TB18)	
Number of I/O points		16 (I/O allocation is set as a 16-points input module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		50mA (TYP. all points ON)	
Weight		0.16kg	

External Connections	Terminal Block Number	Signal Name
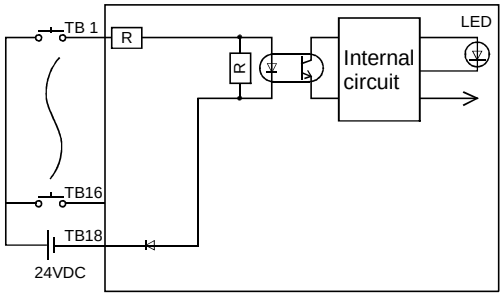	TB1	X00
	TB2	X01
	TB3	X02
	TB4	X03
	TB5	X04
	TB6	X05
	TB7	X06
	TB8	X07
	TB9	X08
	TB10	X09
	TB11	X0A
	TB12	X0B
	TB13	X0C
	TB14	X0D
	TB15	X0E
	TB16	X0F
	TB17	Vacant
	TB18	COM

∗: For the setting method, refer to the section 1.3.1.

2.13 QX81 DC Input Module (Negative Common Type)

Specifications \ Type		DC Input Module (Negative Common Type) QX81	Appearance
Number of input points		32 points	
Isolation method		Photocoupler	
Rated input voltage		24VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 4mA	
Input derating		Refer to the derating chart.	
ON voltage/ON current		19V or higher/3mA or higher	
OFF voltage/OFF current		11V or lower/1.7mA or lower	
Input impedance		Approx. 5.6kΩ	
Response time	OFF to ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms.	
	ON to OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms.	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		32 points/common (common terminal: 17, 18, 36)	
Number of I/O points		32 (I/O allocation is set as a 32-points input module)	
Operation indicator		ON indication (LED)	
External connections		37-pin D-sub connector	
Applicable wire size		0.3mm^2 (For A6CON1E) ∗2	
External wiring connector		A6CON1E, A6CON2E, A6CON3E (optional)	
Applicable connector/terminal block conversion module		A6TBX36-E, A6TBX54-E, A6TBX70-E	
5VDC internal current consumption		75mA (TYP. all points ON)	
Weight		0.16kg	

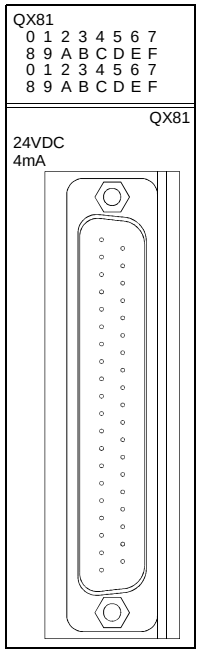

Derating Chart

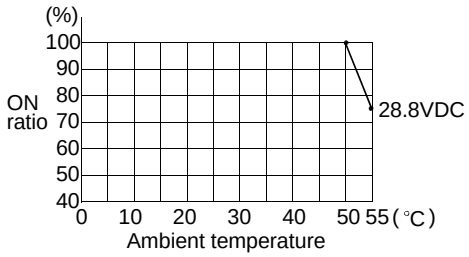

External Connections

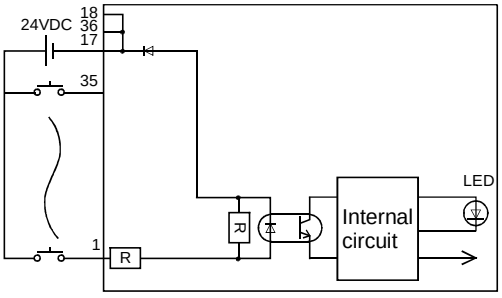

Pin-Outs



Module front view

Pin No.	Signal No.	Pin No.	Signal No.
1	X00	9	X10
20	X01	28	X11
2	X02	10	X12
21	X03	29	X13
3	X04	11	X14
22	X05	30	X15
4	X06	12	X16
23	X07	31	X17
5	X08	13	X18
24	X09	32	X19
6	X0A	14	X1A
25	X0B	33	X1B
7	X0C	15	X1C
26	X0D	34	X1D
8	X0E	16	X1E
27	X0F	35	X1F
17	COM	37	Vacant
36	COM	19	Vacant
18	COM		

∗1: For the setting method, refer to the section 1.3.1.

∗2: When using A6CON2E or A6CON3E, refer to Chapter 7.

2.14 QX82 DC Input Module (Negative Common Type)

Specifications \ Type		DC Input Module (Negative Common Type) QX82	Appearance
Number of input points		64 points	
Isolation method		Photocoupler	
Rated input voltage		24VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 4mA	
Input derating		Refer to the derating chart.	
ON voltage/ON current		19V or higher/3mA or higher	
OFF voltage/OFF current		11V or lower/1.7mA or lower	
Input impedance		Approx. 5.6kΩ	
Response time	OFF to ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms.	
	ON to OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms.	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		32 points/common (common terminal: 1B01, 1B02, 2B01, 2B02)	
Number of I/O points		64 (I/O allocation is set as a 32-points input module)	
Operation indicator		ON indication (LED), 32 point switch-over using switch	
External connections		40-pin connector	
Applicable wire size		0.3mm^2 (For A6CON1 or A6CON4) ∗4	
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)	
Applicable connector/terminal block conversion module		————	
5VDC internal current consumption		90mA (TYP. all points ON)	
Weight		0.18kg	

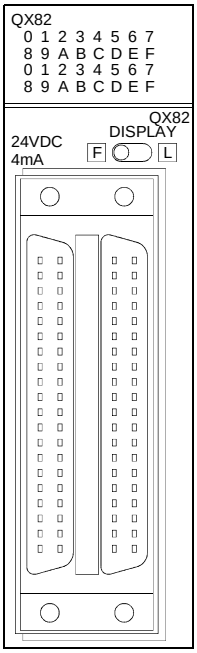

Derating Chart

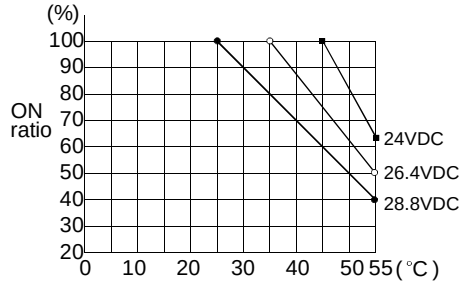

External Connections

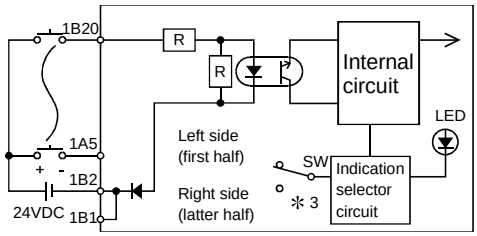

The above diagram shows the first half of 32 points (F).
The latter half of 32 points (L) are similar.

Pin-Outs

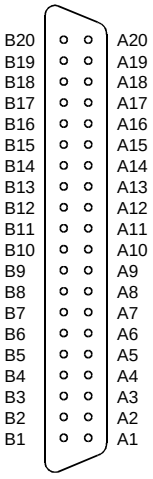

Module front view

Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.
1B20	X00	1A20	X10	2B20	X20	2A20	X30
1B19	X01	1A19	X11	2B19	X21	2A19	X31
1B18	X02	1A18	X12	2B18	X22	2A18	X32
1B17	X03	1A17	X13	2B17	X23	2A17	X33
1B16	X04	1A16	X14	2B16	X24	2A16	X34
1B15	X05	1A15	X15	2B15	X25	2A15	X35
1B14	X06	1A14	X16	2B14	X26	2A14	X36
1B13	X07	1A13	X17	2B13	X27	2A13	X37
1B12	X08	1A12	X18	2B12	X28	2A12	X38
1B11	X09	1A11	X19	2B11	X29	2A11	X39
1B10	X0A	1A10	X1A	2B10	X2A	2A10	X3A
1B09	X0B	1A09	X1B	2B09	X2B	2A09	X3B
1B08	X0C	1A08	X1C	2B08	X2C	2A08	X3C
1B07	X0D	1A07	X1D	2B07	X2D	2A07	X3D
1B06	X0E	1A06	X1E	2B06	X2E	2A06	X3E
1B05	X0F	1A05	X1F	2B05	X2F	2A05	X3F
1B04	Vacant	1A04	Vacant	2B04	Vacant	2A04	Vacant
1B03	Vacant	1A03	Vacant	2B03	Vacant	2A03	Vacant
1B02	COM	1A02	Vacant	2B02	COM2	2A02	Vacant
1B01	COM	1A01	Vacant	2B01	COM2	2A01	Vacant

∗1: For the setting method, refer to the section 1.3.1.
∗2: Pin number of 1□□□ indicates that of the left-hand side connector, and pin number of 2□□□ indicates that of the right-hand side connector.
∗3: Selection of left-hand (F) side provides the first half (X00 to X1F) LED indications, and selection of right-hand (L) side provides the latter half (X20 to X3F) LED indications.
∗4: When using A6CON2 or A6CON3, refer to Chapter 7.

2.15 QX82-S1 DC Input Module (Negative Common Type)

Specifications \ Type			DC Input Module (Negative Common Type)				
			QX82-S1				Appearance
Number of input points			64 points				
Isolation method			Photocoupler				
Rated input voltage			24VDC (+20/-15%, ripple ratio within 5%)				
Rated input current			Approx. 4mA				
Input derating			Refer to the derating chart.				
ON voltage/ON current			19V or higher/3.0mA or higher				
OFF voltage/OFF current			9.5V or lower/1.5mA or lower				
Input impedance			Approx. 5.6kΩ				
Response time	Set value ∗1		0.1	0.2	0.4	0.6	1
	OFF to ON	Typ	0.05ms	0.15ms	0.30ms	0.55ms	1.05ms
		max	0.12ms	0.20ms	0.40ms	0.60ms	1.20ms
	ON to OFF	Typ	0.15ms	0.20ms	0.35ms	0.60ms	1.10ms
		max	0.20ms	0.30ms	0.50ms	0.70ms	1.30ms
Dielectric withstand voltage			560VAC rms/3 cycles (altitude 2000m (6557.38ft.))				
Insulation resistance			10MΩ or more by insulation resistance tester				
Noise immunity			By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency				
			First transient noise IEC61000-4-4: 1kV				
Protection of degree			IP2X				
Common terminal arrangement			32 points/common (common terminal: 1B01, 1B02, 2B01, 2B02)				
Number of I/O points			64 (I/O allocation is set as a 64-points Hi. input module)				
Operation indicator			ON indication (LED)				
External connections			40-pin connector				
Applicable wire size			0.3mm^2 (For A6CON1 or A6CON4) ∗4				
External wiring connector			A6CON1, A6CON2, A6CON3, A6CON4 (optional)				
Applicable connector/terminal block conversion module			————				
5VDC internal current consumption			90mA (TYP. all points ON)				
Weight			0.18kg				

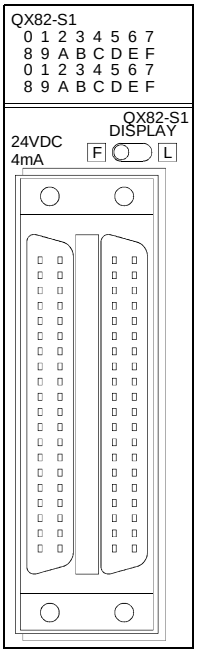

∗1: CPU parameter setting. (Initial setting is 0.2ms)
Response time can be changed on SW5D5C-GPPW or later.
For the setting method, refer to the section 1.3.1.

∗2: Pin number of 1□□□ indicates that of the left-hand side connector, and pin number of 2□□□ indicates that of the right-hand side connector.

∗3: Selection of left-hand (F) side provides the first half (X00 to X1F) LED indications, and selection of right-hand (L) side provides the latter half (X20 to X3F) LED indications.

∗4: When using A6CON2 or A6CON3, refer to Chapter 7.

Derating Chart

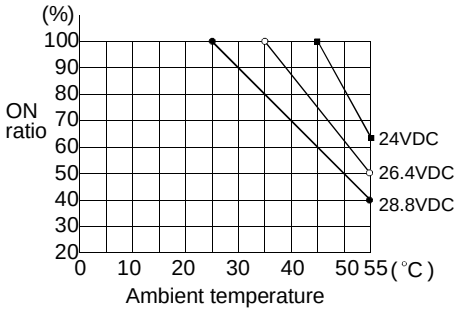

External Connections

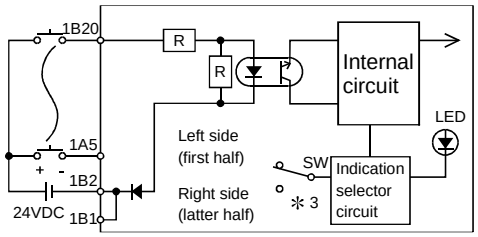

The above diagram shows the first half of 32 points (F).
The latter half of 32 points (L) are similar.

Pin-Outs

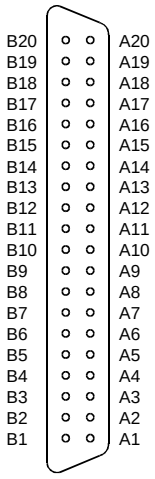

Module front view

Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.
1B20	X00	1A20	X10	2B20	X20	2A20	X30
1B19	X01	1A19	X11	2B19	X21	2A19	X31
1B18	X02	1A18	X12	2B18	X22	2A18	X32
1B17	X03	1A17	X13	2B17	X23	2A17	X33
1B16	X04	1A16	X14	2B16	X24	2A16	X34
1B15	X05	1A15	X15	2B15	X25	2A15	X35
1B14	X06	1A14	X16	2B14	X26	2A14	X36
1B13	X07	1A13	X17	2B13	X27	2A13	X37
1B12	X08	1A12	X18	2B12	X28	2A12	X38
1B11	X09	1A11	X19	2B11	X29	2A11	X39
1B10	X0A	1A10	X1A	2B10	X2A	2A10	X3A
1B09	X0B	1A09	X1B	2B09	X2B	2A09	X3B
1B08	X0C	1A08	X1C	2B08	X2C	2A08	X3C
1B07	X0D	1A07	X1D	2B07	X2D	2A07	X3D
1B06	X0E	1A06	X1E	2B06	X2E	2A06	X3E
1B05	X0F	1A05	X1F	2B05	X2F	2A05	X3F
1B04	Vacant	1A04	Vacant	2B04	Vacant	2A04	Vacant
1B03	Vacant	1A03	Vacant	2B03	Vacant	2A03	Vacant
1B02	COM	1A02	Vacant	2B02	COM2	2A02	Vacant
1B01	COM	1A01	Vacant	2B01	COM2	2A01	Vacant

2 - 18

3. OUTPUT MODULE SPECIFICATIONS

3.1 QY10 Contact Output Module

Specifications \ Type		Contact Output Module QY10	Appearance
Number of output points		16 points	
Isolation method		Relay	
Rated switching voltage, current		24VDC 2A (resistive load) 240VAC 2A (cos ϕ =1) /point, 8A/common	
Minimum switching load		5VDC 1mA	
Maximum switching load		264VAC 125VDC	
Response time	OFF to ON	10ms or less	
	ON to OFF	12ms or less	
Life	Mechanical	20 million times or more	
	Electrical	Rated switching voltage/current load More than 100 thousand times or more	
		200VAC 1.5A, 240VAC 1A (COS ϕ =0.7) 100 thousand times or more 200VAC 0.4A, 240VAC 0.3A (COS ϕ =0.7) 300 thousand times or more	
		200VAC 1A, 240VAC 0.5A (COS ϕ =0.35) 100 thousand times or more 200VAC 0.3A, 240VAC 0.15A (COS ϕ =0.35) 300 thousand times or more	
		24VDC 1A, 100VDC 0.1A (L/R=7ms) 100 thousand times or more 24VDC 0.3A, 100VDC 0.03A (L/R=7ms) 300 thousand times or more	
Maximum switching frequency		3600 times/hour	
Surge suppressor		No	
Fuse		No	
Dielectric withstand voltage		2830VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10M Ω or more by insulation resistance tester	
Noise immunity		By noise simulator of 1500Vp-p noise voltage, 1 μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP1X	
Common terminal arrangement		16 points/common (common terminal: TB17)	
Number of I/O points		16 (I/O allocation is set as a 16-points output module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3 × 6 screws)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		430mA (TYP. all points ON)	
Weight		0.22kg	

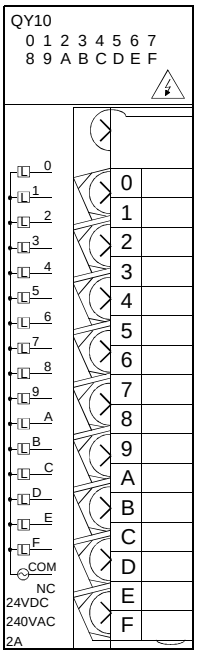

External Connections	Terminal Block Number	Signal Name
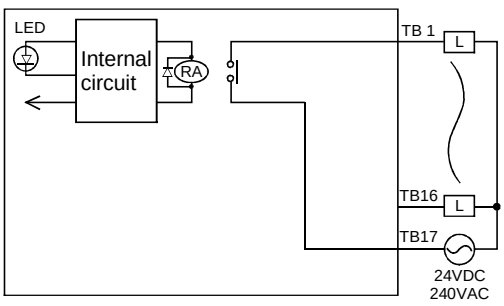	TB1	Y00
	TB2	Y01
	TB3	Y02
	TB4	Y03
	TB5	Y04
	TB6	Y05
	TB7	Y06
	TB8	Y07
	TB9	Y08
	TB10	Y09
	TB11	Y0A
	TB12	Y0B
	TB13	Y0C
	TB14	Y0D
	TB15	Y0E
	TB16	Y0F
	TB17	COM
	TB18	Vacant

3.2 QY18A Contact Output Module (All Independent)

Specifications \ Type		Contact Output Module (All points Independent)	
		QY18A	Appearance
Number of output points		8 points	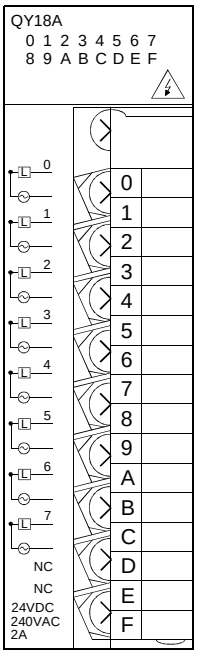
Isolation method		Relay isolation	
Rated switching voltage/current		24VDC 2A (resistive load) / 240VAC 2A (cos ϕ =1) } point	
Min. switching load		5VDC 1mA	
Max. switching load		264VAC 125VDC	
Response time	OFF to ON	10ms or shoter	
	ON to OFF	12ms or shoter	
Life	Mechanical	20 million cycles or more	
	Electrical	Rated switching voltage/current load: 100 thousand cycles or more	
		200VAC 1.5A, 240VAC 1A (COS ϕ =0.7) 100 thousand cycles or more 200VAC 0.4A, 240VAC 0.3A (COS ϕ =0.7) 300 thousand cycles or more	
		200VAC 1A, 240VAC 0.5A (COS ϕ =0.35) 100 thousand cycles or more 200VAC 0.3A, 240VAC 0.15A (COS ϕ =0.35) 300 thousand cycles or more	
		24VDC 1A, 100VDC 0.1A (L/R=7ms) 100 thousand cycles or more 24VDC 0.3A, 100VDC 0.03A (L/R=7ms) 300 thousand cycles or more	
Max. switching frequency		3600 cycles/hour	
Surge killer		None	
Fuse		None	
Dielectric maximum voltage		2830VAC rms/3 cycles (altitude 2000m)	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 1500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP1X	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3$\times$6 screws)	
Number of I/O points		16 (I/O allocation is set as a 16-points output module)	
Applicable wire size		Core cable: 0.3 to 0.75mm^2 (Outside diameter: 2.8mm or smaller)	
Applicable connector terminal		R1.25-3 (Terminals with sleeve cannot be used)	
5VDC internal current consumption		430mA (TYP. all points ON)	
Weight		0.22kg	

External Connections	Terminal Block No.	Signal Name
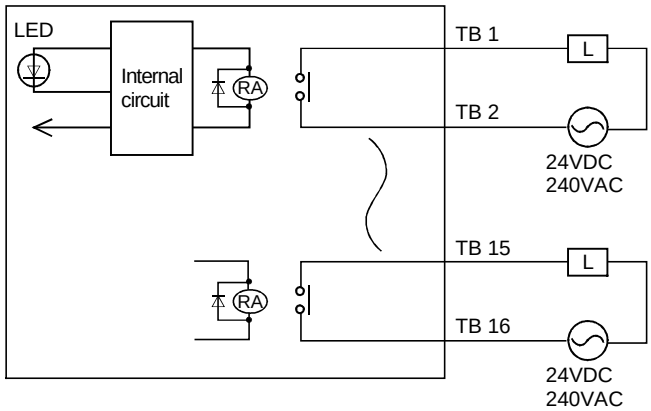	TB1	Y00
	TB2	
	TB3	Y01
	TB4	
	TB5	Y02
	TB6	
	TB7	Y03
	TB8	
	TB9	Y04
	TB10	
	TB11	Y05
	TB12	
	TB13	Y06
	TB14	
	TB15	Y07
	TB16	
	TB17	Vacant
	TB18	Vacant

3.3 QY22 TRIAC Output Module

Specifications \ Type		TRIAC Output Module	
		QY22	Appearance
Number of output points		16 points	
Isolation method		Photocoupler	
Rated load voltage		100-240VDC (+20/-15%)	
Maximum load current		0.6A/point, 4.8A/common	
Minimum load voltage/current		24VAC 100mA, 100VAC 25mA, 240VAC 25mA	
Maximum rush current		20A/cycle or less	
Leakage current at OFF		3mA or lower (for 240V, 60Hz), 1.5mA or lower (for 120V, 60Hz)	
Maximum voltage drop at ON		1.5V or lower	
Response time	OFF to ON	1ms + 0.5Hz or less	
	ON to OFF	1ms + 0.5Hz or less (rated load, resistance load)	
Surge killer		CR absorber	
Fuse		None (Attaching a fuse to each external wiring is recommended. Refer to Section 1.2 (14))	
Dielectric maximum voltage		2830VAC rms/3 cycles (altitude 2000m)	
Insulation resistance		10MΩ or higher by insulation resistance meter	
Noise immunity		By noise simulator of 1.5kVp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP1X	
Common terminal arrangement		16 points/common (common terminal: TB18)	
Number of I/O points		16 (I/O allocation is set as a 16-points output module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Applicable wire size		Core cable: 0.3 to 0.75mm^2 (Outside diameter: 2.8mm or smaller)	
Applicable connector terminal		R1.25-3 (Terminals with sleeve cannot be used)	
5VDC internal current consumption		250mA (Max., all points ON)	
Weight		0.40kg	

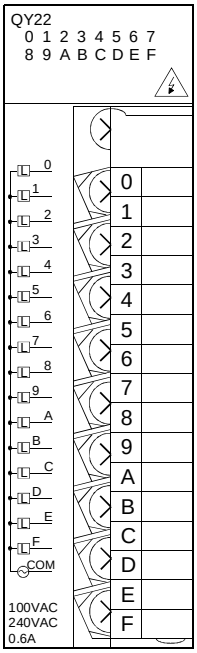

External Connections

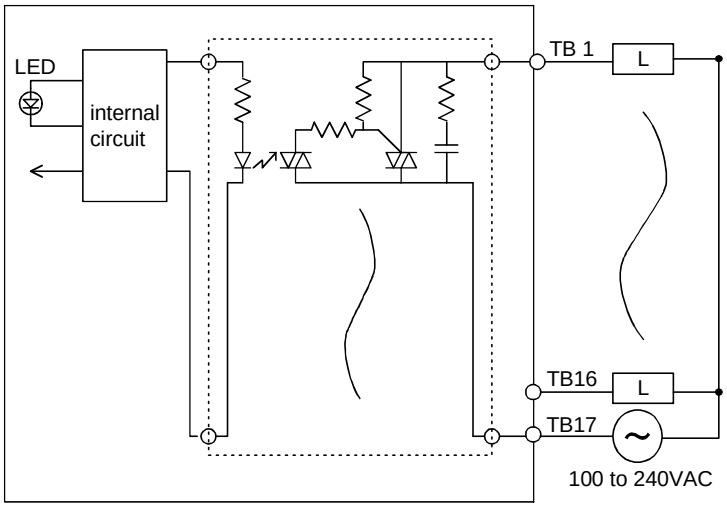

Terminal Block Number	Signal Name
TB1	Y00
TB2	Y01
TB3	Y02
TB4	Y03
TB5	Y04
TB6	Y05
TB7	Y06
TB8	Y07
TB9	Y08
TB10	Y09
TB11	Y0A
TB12	Y0B
TB13	Y0C
TB14	Y0D
TB15	Y0E
TB16	Y0F
TB17	COM
TB18	Vacant

∗1: Wire the module taking care so that the wiring does not interfere with the left-side module.

3.4 QY40P Transistor Output Module (Sink Type)

Specifications \ Type		Transistor Output Module (Sink Type) QY40P	Appearance
Number of output points		16 points	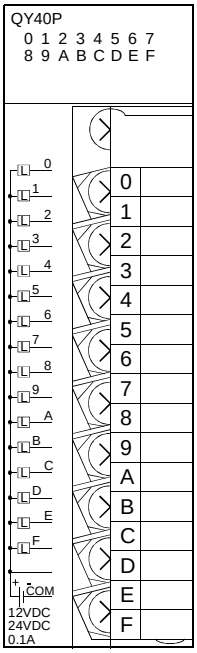
Isolation method		Photocoupler	
Rated load voltage		12-24VDC (+20/-15%)	
Maximum load current		0.1A/point, 1.6A/common	
Maximum inrush current		0.7A, 10ms or less	
Leakage current at OFF		0.1mA or less	
Maximum voltage drop at ON		0.1VDC (TYP.) 0.1A, 0.2VDC (MAX.) 0.1A	
Response time	OFF to ON	1ms or less	
	ON to OFF	1ms or less (rated load, resistive load)	
Surge suppressor		Zener diode	
Fuse		No	
External supply power	Voltage	12-24VDC (+20/-15%) (ripple ratio within 5%)	
	Current	10mA (at 24VDC) (Max. all points ON)	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		16 points/common (common terminal: TB18)	
Protection function		Yes (thermal protection, short circuit protection) • Thermal protection is activated in increments of 1 point. • Short circuit protection is activated in increments of 1 point.	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Number of I/O points		16 (I/O allocation is set as a 16-points output module)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		65mA (TYP. all points ON)	
Weight		0.16kg	

External Connections	Terminal Block Number	Signal Name
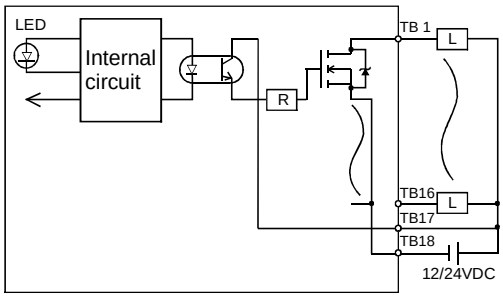	TB1	Y00
	TB2	Y01
	TB3	Y02
	TB4	Y03
	TB5	Y04
	TB6	Y05
	TB7	Y06
	TB8	Y07
	TB9	Y08
	TB10	Y09
	TB11	Y0A
	TB12	Y0B
	TB13	Y0C
	TB14	Y0D
	TB15	Y0E
	TB16	Y0F
	TB17	12/24VDC
	TB18	COM

3 - 4

3.5 QY41P Transistor Output Module (Sink Type)

Specifications \ Type		Transistor Output Module (Sink Type) QY41P	Appearance
Number of output points		32 points	
Isolation method		Photocoupler	
Rated load voltage		12-24VDC (+20/-15%)	
Maximum load current		0.1A/point, 2A/common	
Maximum inrush current		0.7A, 10ms or less	
Leakage current at OFF		0.1mA or less	
Maximum voltage drop at ON		0.1VDC (TYP.) 0.1A, 0.2VDC (MAX.) 0.1A	
Response time	OFF to ON	1ms or less	
	ON to OFF	1ms or less (rated load, resistive load)	
Surge suppressor		Zener diode	
Fuse		No	
External supply power	Voltage	12-24VDC (+20/-15%) (ripple ratio within 5%)	
	Current	20mA (at 24VDC)	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		32 points/common (common terminal: A01, A02)	
Number of I/O points		32 (I/O allocation is set as a 32-points output module)	
Protection function		Yes (thermal protection, short circuit protection) • Thermal protection is activated in increments of 1 point. • Short circuit protection is activated in increments of 1 point.	
Operation indicator		ON indication (LED)	
External connections		40-pin connector	
Applicable wire size		0.3mm^2 (For A6CON1 or A6CON4)*	
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)	
Applicable connector/terminal block conversion module		A6TBXY36, A6TBXY54	
5VDC internal current consumption		105mA (TYP. all points ON)	
Weight		0.15kg	

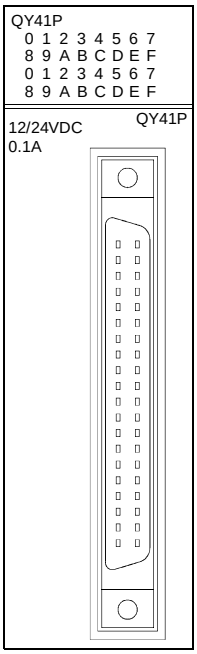

External Connections

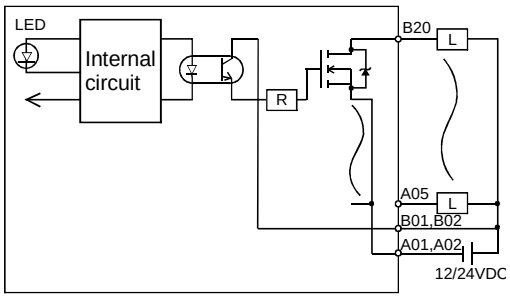

Pin-Outs



Module front view

Pin No.	Signal No.	Pin No.	Signal No.
B20	Y00	A20	Y10
B19	Y01	A19	Y11
B18	Y02	A18	Y12
B17	Y03	A17	Y13
B16	Y04	A16	Y14
B15	Y05	A15	Y15
B14	Y06	A14	Y16
B13	Y07	A13	Y17
B12	Y08	A12	Y18
B11	Y09	A11	Y19
B10	Y0A	A10	Y1A
B09	Y0B	A09	Y1B
B08	Y0C	A08	Y1C
B07	Y0D	A07	Y1D
B06	Y0E	A06	Y1E
B05	Y0F	A05	Y1F
B04	Vacant	A04	Vacant
B03	Vacant	A03	Vacant
B02	12/24VDC	A02	COM
B01	12/24VDC	A01	COM

*: When using A6CON2 or A6CON3, refer to Chapter 7.

3.6 QY42P Transistor Output Module (Sink Type)

Specifications \ Type		Transistor Output Module (Sink Type) QY42P	Appearance
Number of output points		64 points	
Isolation method		Photocoupler	
Rated load voltage		12-24VDC (+20/-15%)	
Maximum load current		0.1A/point, 2A/common	
Maximum inrush current		0.7A, 10ms or less	
Leakage current at OFF		0.1mA or less	
Maximum voltage drop at ON		0.1VDC (TYP.) 0.1A, 0.2VDC (MAX.) 0.1A	
Response time	OFF to ON	1ms or less	
	ON to OFF	1ms or less (rated load, resistive load)	
Surge suppressor		Zener diode	
Fuse		No	
External supply power	Voltage	12-24VDC (+20/-15%) (ripple ratio within 5%)	
	Current	20mA (at 24VDC)/common	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		32 points/common (common terminal: 1A01, 1A02, 2A01, 2A02)	
Number of I/O points		64 (I/O allocation is set as a 64-points output module)	
Protection function		Yes (thermal protection, short circuit protection) • Thermal protection is activated in increments of 1 point. • Short circuit protection is activated in increments of 1 point.	
Operation indicator		ON indication (LED), 32 point switch-over using switch	
External connections		40-pin connector	
Applicable wire size		0.3mm^2 (For A6CON1 or A6CON4)＊3	
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)	
Applicable connector/terminal block conversion module		A6TBXY36, A6TBXY54	
5VDC internal current consumption		150mA (TYP. all points ON)	
Weight		0.17kg	

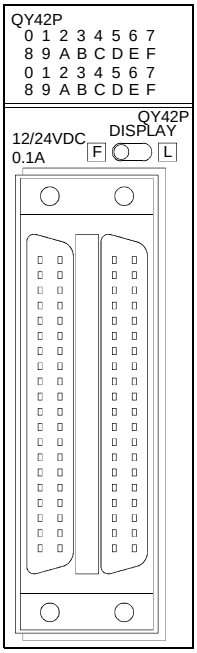

External Connections

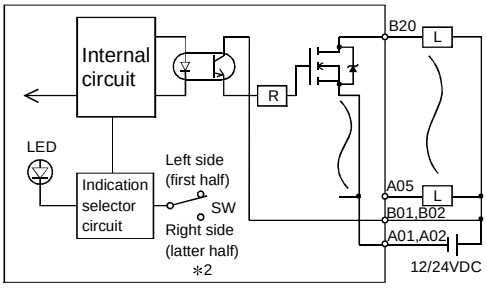

The above diagram shows the first half of 32 points (F).
The latter half of 32 points (L) are similar.

Pin-Outs



Module front view

Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.
1B20	Y00	1A20	Y10	2B20	Y20	2A20	Y30
1B19	Y01	1A19	Y11	2B19	Y21	2A19	Y31
1B18	Y02	1A18	Y12	2B18	Y22	2A18	Y32
1B17	Y03	1A17	Y13	2B17	Y23	2A17	Y33
1B16	Y04	1A16	Y14	2B16	Y24	2A16	Y34
1B15	Y05	1A15	Y15	2B15	Y25	2A15	Y35
1B14	Y06	1A14	Y16	2B14	Y26	2A14	Y36
1B13	Y07	1A13	Y17	2B13	Y27	2A13	Y37
1B12	Y08	1A12	Y18	2B12	Y28	2A12	Y38
1B11	Y09	1A11	Y19	2B11	Y29	2A11	Y39
1B10	Y0A	1A10	Y1A	2B10	Y2A	2A10	Y3A
1B09	Y0B	1A09	Y1B	2B09	Y2B	2A09	Y3B
1B08	Y0C	1A08	Y1C	2B08	Y2C	2A08	Y3C
1B07	Y0D	1A07	Y1D	2B07	Y2D	2A07	Y3D
1B06	Y0E	1A06	Y1E	2B06	Y2E	2A06	Y3E
1B05	Y0F	1A05	Y1F	2B05	Y2F	2A05	Y3F
1B04	Vacant	1A04	Vacant	2B04	Vacant	2A04	Vacant
1B03	Vacant	1A03	Vacant	2B03	Vacant	2A03	Vacant
1B02	12/24 VDC	1A02	COM1	2B02	12/24 VDC	2A02	COM2
1B01	12/24 VDC	1A01	COM1	2B01	12/24 VDC	2A01	COM2

＊1: Pin number of 1□□□ indicates that of the left-hand side connector, and pin number of 2□□□ indicates that of the right-hand side connector.
＊2: Selection of left-hand (F) side provides the first half (Y00 to Y1F) LED indications, and selection of right-hand (L) side provides the latter half (Y20 to Y3F) LED indications.
＊3: When using A6CON2 or A6CON3, refer to Chapter 7.

3.7 QY50 Transistor Output Module (Sink Type)

Specifications \ Type		Transistor Output Module (Sink Type) QY50	Appearance
Number of output points		16 points	
Isolation method		Photocoupler	
Rated load voltage		12-24VDC (+20/-15%)	
Maximum load current		0.5A/point, 4A/common	
Maximum inrush current		4A, 10ms or less	
Leakage current at OFF		0.1mA or less	
Maximum voltage drop at ON		0.2VDC (TYP.) 0.5A, 0.3VDC (MAX.) 0.5A	
Response time	OFF to ON	1ms or less	
	ON to OFF	1ms or less (rated load, resistive load)	
Surge suppressor		Zener diode	
Fuse		6.7A (unchangeable) (fuse blow capacity: 50A)	
Fuse blow indication		Yes (When fuse blows, LED indicates it and signal is output to CPU)	
External supply power	Voltage	12-24VDC (+20/-15%) (ripple ratio within 5%)	
	Current	20mA (at 24VDC)	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		16 points/common (common terminal: TB18)	
Number of I/O points		16 (I/O allocation is set as a 16-points output module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		80mA (TYP. all points ON)	
Weight		0.17kg	

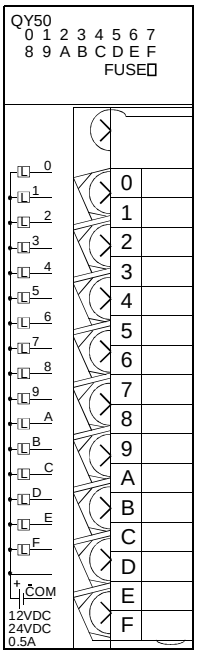

External Connections	Terminal Block Number	Signal Name
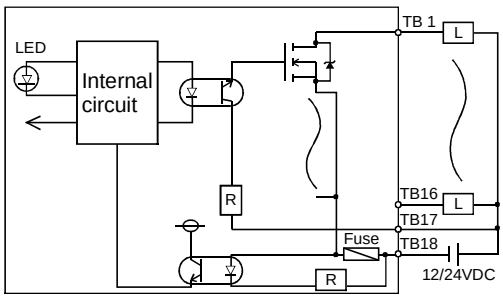	TB1	Y00
	TB2	Y01
	TB3	Y02
	TB4	Y03
	TB5	Y04
	TB6	Y05
	TB7	Y06
	TB8	Y07
	TB9	Y08
	TB10	Y09
	TB11	Y0A
	TB12	Y0B
	TB13	Y0C
	TB14	Y0D
	TB15	Y0E
	TB16	Y0F
	TB17	12/24VDC
	TB18	COM

3 - 7

3.8 QY68A Transistor Output Module (All Points Independent, Sink/Source Type)

Specifications \ Type		Transistor Output Module (All Points Independent, Sink/Source Type) QY68A	Appearance
Number of output points		8 points	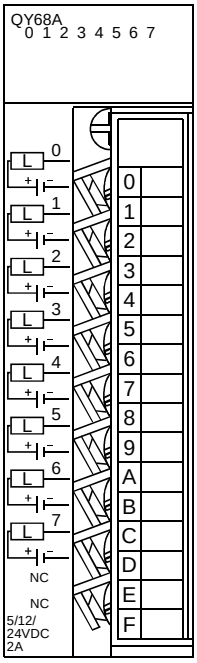
Isolation method		Photocoupler	
Rated load voltage		5-24VDC (+20/-10%)	
Maximum load current		2A/point, 8A/unit	
Maximum inrush current		8A, 10ms or less	
Leakage current at OFF		0.1mA or less	
Maximum voltage drop at ON		0.3VDC (MAX.) 2A	
Response time	OFF to ON	3ms or less	
	ON to OFF	10ms or less (resistive load)	
Surge suppressor		Zener diode	
Fuse		None (Attaching a fuse to external wiring is recommended. Refer to Section 1.2 (15))	
External supply power		None	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		All points Independent	
Number of I/O points		16 (I/O allocation is set as a 16-points output module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Applicable wire size		0.3 to 0.75mm² core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		110mA (TYP. all points ON)	
Weight		0.14kg	

External Connections	Terminal Block Number	Signal Name
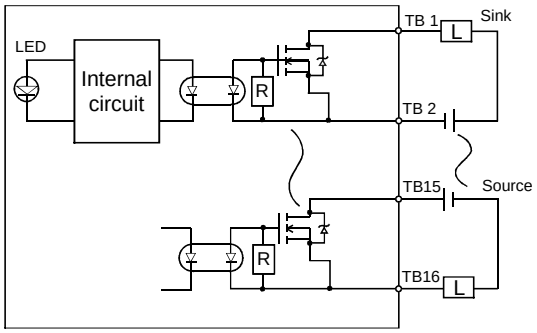	TB1	Y00
	TB2	
	TB3	Y01
	TB4	
	TB5	Y02
	TB6	
	TB7	Y03
	TB8	
	TB9	Y04
	TB10	
	TB11	Y05
	TB12	
	TB13	Y06
	TB14	
	TB15	Y07
	TB16	
	TB17	Vacant
	TB18	Vacant

3.9 QY70 Transistor Output Module (Sink Type)

Specifications \ Type		Transistor Output Module (Sink Type)	
		QY70	Appearance
Number of output points		16 points	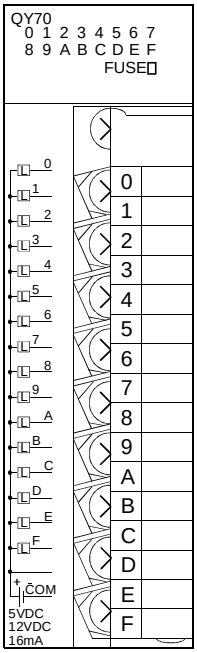
Isolation method		Photocoupler	
Rated load voltage		5/12VDC (+25/-10%)	
Maximum load current		16mA/point, 256mA/common	
Maximum inrush current		40mA, 10ms or less	
Output voltage at OFF		VOH: 3.5VDC (VCC=5VDC, IOH=0.4mA)	
Maximum voltage drop at ON		VOL: 0.3VDC	
Response time	OFF to ON	0.5ms or less	
	ON to OFF	0.5ms or less (resistive load)	
Surge suppressor		None	
Fuse		1.6A (unchangeable) (fuse blow capacity: 50A)	
Fuse blow indication		Yes (When fuse blows, LED indicates it and signal is output to CPU)	
External supply power	Voltage	5/12VDC (+25/-10%) (ripple ratio within 5%)	
	Current	90mA (at 12VDC) (Max. all points ON)	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		16 points/common (common terminal: TB18)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Number of I/O points		16 (I/O allocation is set as a 16-points output module)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		95mA (TYP. all points ON)	
Weight		0.14kg	

External Connections	Terminal Block Number	Signal Name
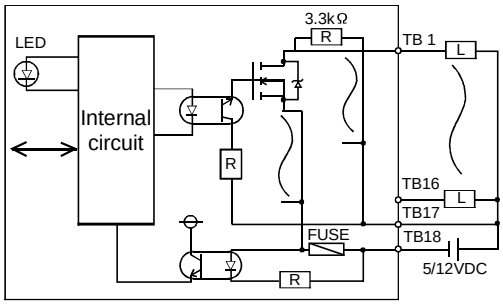	TB1	Y00
	TB2	Y01
	TB3	Y02
	TB4	Y03
	TB5	Y04
	TB6	Y05
	TB7	Y06
	TB8	Y07
	TB9	Y08
	TB10	Y09
	TB11	Y0A
	TB12	Y0B
	TB13	Y0C
	TB14	Y0D
	TB15	Y0E
	TB16	Y0F
	TB17	5/12VDC
	TB18	COM

3.10 QY71 Transistor Output Module (Sink Type)

Specifications \ Type		Transistor Output Module (Sink Type) QY71	Appearance
Number of output points		32 points	
Isolation method		Photocoupler	
Rated load voltage		5/12VDC (+25/-10%)	
Maximum load current		16mA/point, 512mA/common	
Maximum inrush current		40mA, 10ms or less	
Output voltage at OFF		VOH: 3.5VDC (VCC=5VDC, IOH=0.4mA)	
Maximum voltage drop at ON		VOL: 0.3VDC	
Response time	OFF to ON	0.5ms or less	
	ON to OFF	0.5ms or less (resistive load)	
Surge suppressor		None	
Fuse		1.6A (unchangeable) (fuse blow capacity: 50A)	
Fuse blow indication		Yes (When fuse blows, LED indicates it and signal is output to CPU)	
External supply power	Voltage	5/12VDC (+25/-10%) (ripple ratio within 5%)	
	Current	170mA (at 12VDC)	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 0.25kV	
Protection of degree		IP2X	
Common terminal arrangement		32 points/common (common terminal: A01, A02)	
Number of I/O points		32 (I/O allocation is set as a 32-points output module)	
Operation indicator		ON indication (LED)	
External connections		40-pin connector	
Applicable wire size		0.3mm^2 (For A6CON1 or A6CON4) *	
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)	
5VDC internal current consumption		150mA (TYP. all points ON)	
Weight		0.14kg	

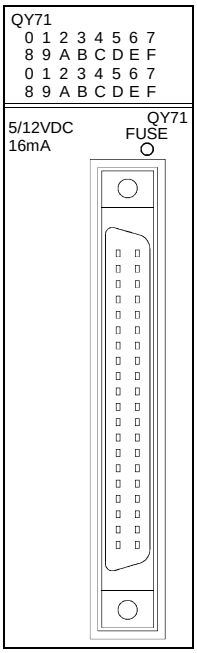

External Connections

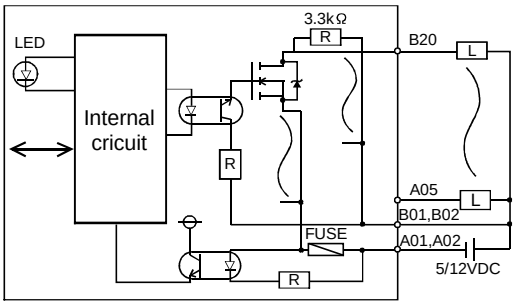

Pin-Outs

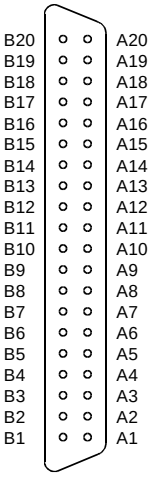

Module front view

Pin No.	Signal No.	Pin No.	Signal No.
B20	Y00	A20	Y10
B19	Y01	A19	Y11
B18	Y02	A18	Y12
B17	Y03	A17	Y13
B16	Y04	A16	Y14
B15	Y05	A15	Y15
B14	Y06	A14	Y16
B13	Y07	A13	Y17
B12	Y08	A12	Y18
B11	Y09	A11	Y19
B10	Y0A	A10	Y1A
B09	Y0B	A09	Y1B
B08	Y0C	A08	Y1C
B07	Y0D	A07	Y1D
B06	Y0E	A06	Y1E
B05	Y0F	A05	Y1F
B04	Vacant	A04	Vacant
B03	Vacant	A03	Vacant
B02	5/12VDC	A02	COM
B01	5/12VDC	A01	COM

*: When using A6CON2 or A6CON3, refer to Chapter 7.

3.11 QY80 Transistor Output Module (Source Type)

Specifications \ Type		Transistor Output Module (Source Type) QY80	Appearance
Number of output points		16 points	
Isolation method		Photocoupler	
Rated load voltage		12-24VDC (+20/-15%)	
Maximum load current		0.5A/point, 4A/common	
Maximum inrush current		4A, 10ms or less	
Leakage current at OFF		0.1mA or less	
Maximum voltage drop at ON		0.2VDC (TYP.) 0.5A, 0.3VDC (MAX.) 0.5A	
Response time	OFF to ON	1ms or less	
	ON to OFF	1ms or less (rated load, resistive load)	
Surge suppressor		Zener diode	
Fuse		6.7A (unchangeable) (fuse blow capacity: 50A)	
Fuse blow indication		Yes (When fuse blows, LED indicates it and signal is output to CPU)	
External supply power	Voltage	12-24VDC (+20/-15%) (ripple ratio within 5%)	
	Current	20mA (at 24VDC)	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		16 points/common (common terminal: TB17)	
Number of I/O points		16 (I/O allocation is set as a 16-points output module)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screws)	
Applicable wire size		0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)	
Applicable crimping terminal		R1.25-3 (sleeved crimping terminals cannot be used.)	
5VDC internal current consumption		80mA (TYP. all points ON)	
Weight		0.17kg	

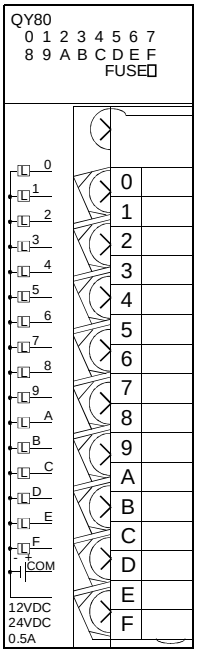

External Connections	Terminal Block Number	Signal Name
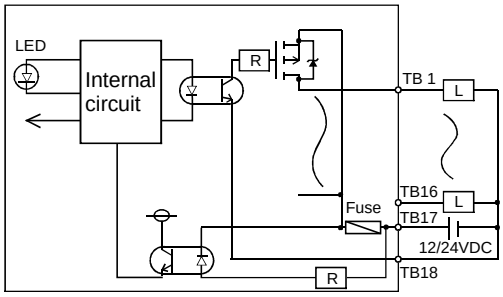	TB1	Y00
	TB2	Y01
	TB3	Y02
	TB4	Y03
	TB5	Y04
	TB6	Y05
	TB7	Y06
	TB8	Y07
	TB9	Y08
	TB10	Y09
	TB11	Y0A
	TB12	Y0B
	TB13	Y0C
	TB14	Y0D
	TB15	Y0E
	TB16	Y0F
	TB17	COM
	TB18	0V

3.12 QY81P Transistor Output Module (Source Type)

Specifications \ Type		Transistor Output Module (Source Type) QY81P	Appearance
Number of output points		32 points	
Isolation method		Photocoupler	
Rated load voltage		12-24VDC (+20/-15%)	
Maximum load current		0.1A/point, 2A/common	
Maximum inrush current		0.7A, 10ms or less	
Leakage current at OFF		0.1mA or less	
Maximum voltage drop at ON		0.1VDC (TYP.) 0.1A, 0.2VDC (MAX.) 0.1A	
Response time	OFF to ON	1ms or less	
	ON to OFF	1ms or less (rated load, resistive load)	
Surge suppressor		Zener diode	
Fuse		No	
External supply power	Voltage	12-24VDC (+20/-15%) (ripple ratio within 5%)	
	Current	40mA (at 24VDC)	
Dielectric withstand voltage		560VAC rms/3 cycles (altitude 2000m (6557.38ft.))	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		32 points/common (common terminal: 17, 18, 36)	
Number of I/O points		32 (I/O allocation is set as a 32-points output module)	
Protection function		Yes (thermal protection, short circuit protection) • Thermal protection is activated in increments of 2 points. • Short circuit protection is activated in increments of 1 point.	
Operation indicator		ON indication (LED)	
External connections		37-pin D-sub connector	
Applicable wire size		0.3mm^2 (For A6CON1E) ∗	
External wiring connector		A6CON1E, A6CON2E, A6CON3E (optional)	
Applicable connector/terminal block conversion module		A6TBY36-E, A6TBY54-E	
5VDC internal current consumption		95mA (TYP. all points ON)	
Weight		0.15kg	

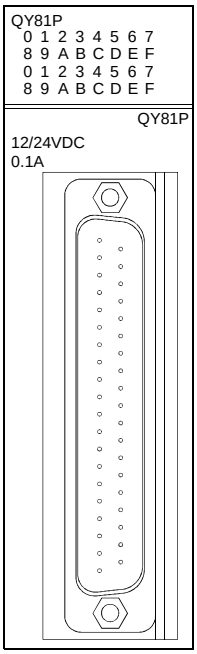

Derating Chart	Pin-Outs	Pin No.	Signal No.	Pin No.	Signal No.
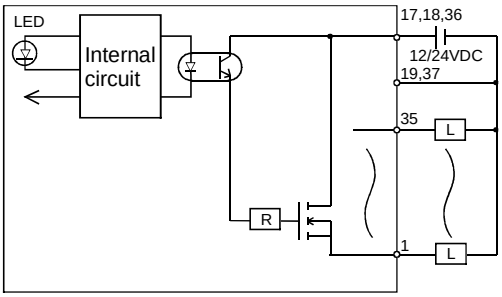		1	Y00	9	Y10
		20	Y01	28	Y11
		2	Y02	10	Y12
		21	Y03	29	Y13
		3	Y04	11	Y14
		22	Y05	30	Y15
		4	Y06	12	Y16
		23	Y07	31	Y17
		5	Y08	13	Y18
		24	Y09	32	Y19
		6	Y0A	14	Y1A
		25	Y0B	33	Y1B
		7	Y0C	15	Y1C
		26	Y0D	34	Y1D
		8	Y0E	16	Y1E
		27	Y0F	35	Y1F
		17	COM	37	0V
		36	COM	19	0V
		18	COM		

Module front view

∗: When using A6CON2E or A6CON3E, refer to Chapter 7.

MEMO

3 - 13

4. INPUT/OUTPUT CONPOSITE MODULE

4.1 QH42P I/O Module

(1) DC Input Specification (Positive Common Type)

Specifications \ Type		QH42P I/O Module (Input Specification)
Number of input points		32 points
Insulation method		Photocoupler
Rated input voltage		24VDC (+20/-15%, ripple ratio within 5%)
Rated input current		Approx. 4mA
Input derating		See the derating chart.
ON voltage/ON current		19V or higher/3mA or higher
OFF voltage/OFF current		11V or lower/1.7mA or lower
Input resistance		Approx. 5.6kΩ
Response time	OFF→ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms
	ON→OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms
Dielectric maximum voltage		560VAC rms/3 cycles (altitude 2000m)
Insulation resistance		10MΩ or more by insulation resistance tester
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency
		First transient noise IEC61000-4-4: 1kV
Protection of degree		IP2X
Common terminal arrangement		32 points/common (common terminal: 1B01, 1B02)
Number of I/O occupied points		32 points (For I/O allocation on I/O mixed module, set 32 points.)
Operation indicator		ON indication (LED), 32-point switchover using switch
External connections		40-pin connector
Applicable wire size		0.3mm^2 (For A6CON1 or A6CON4) ∗4
External wiring connector		A6CON1, A6CON2, A6CON3, A6CON4 (optional)
Mixed connector/terminal block conversion module		A6TBXY36, A6TBXY54, A6TBX70
5VDC internal current consumption		130mA (TYP, all points ON)
Weight		0.20kg

External Connections

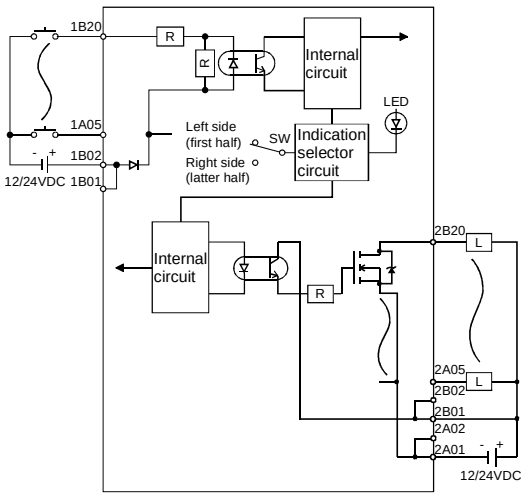

Derating Chart

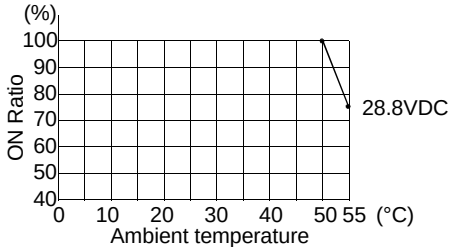

∗1: For the setting method, refer to the Section 1.3.1.

∗2: Selection of left-hand (F) side provides the first half (X00 to X1F) LED indications, and selection of right-hand (L) side provides the latter half (Y00 to Y1F) LED indications.

∗3: When using the main module, use the constructions listed in Section 1.2 (13).

∗4: When using A6CON2 or A6CON3, refer to Chapter 7.

(2) Transistor Output Specification (Sink Type)

Specifications \ Type		QH42P I/O Module (Output Specification)	Appearance
Number of output points		32 points	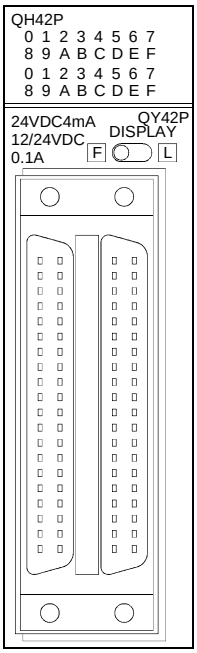
Insulation method		Photocoupler	
Rated load voltage		12-24VDC (+20/-15%)	
Max. load current		0.1A/point, 2A/common	
Max. rush current		0.7A/10ms or less	
Leakage current at OFF		0.1mA or lower	
Max. voltage drop at ON		0.1VDC (TYP.) 0.1A, 0.2VDC (MAX.) 0.1A	
Response time	OFF→ON	1ms or shorter	
	ON→OFF	1ms or shorter (rated load, resistance load)	
Surge killer		Zener diode	
Fuse		None	
External power supply	Voltage	12-24VDC (+20/-15%) (ripple ratio within 5%)	
	Current	15mA (at 24VDC)/common (Max., all points ON)	
Common terminal arrangement		32 points/common (common terminal: 2A01, 2A02)	
Protection function		Provided (thermal protector, protector against shortcircuit) • Thermal protectors operate independently of each other. • Protectors against shortcircuit operate independently of each other.	

Pin-Outs	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.	Pin No.	Signal No.
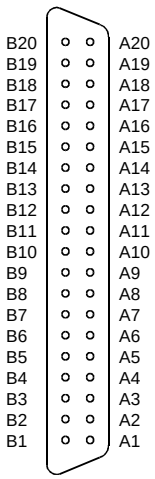	1B20	X00	1A20	X10	2B20	Y00	2A20	Y10
	1B19	X01	1A19	X11	2B19	Y01	2A19	Y11
	1B18	X02	1A18	X12	2B18	Y02	2A18	Y12
	1B17	X03	1A17	X13	2B17	Y03	2A17	Y13
	1B16	X04	1A16	X14	2B16	Y04	2A16	Y14
	1B15	X05	1A15	X15	2B15	Y05	2A15	Y15
	1B14	X06	1A14	X16	2B14	Y06	2A14	Y16
	1B13	X07	1A13	X17	2B13	Y07	2A13	Y17
	1B12	X08	1A12	X18	2B12	Y08	2A12	Y18
	1B11	X09	1A11	X19	2B11	Y09	2A11	Y19
	1B10	X0A	1A10	X1A	2B10	Y0A	2A10	Y1A
	1B09	X0B	1A09	X1B	2B09	Y0B	2A09	Y1B
	1B08	X0C	1A08	X1C	2B08	Y0C	2A08	Y1C
	1B07	X0D	1A07	X1D	2B07	Y0D	2A07	Y1D
	1B06	X0E	1A06	X1E	2B06	Y0E	2A06	Y1E
	1B05	X0F	1A05	X1F	2B05	Y0F	2A05	Y1F
	1B04	Vacant	1A04	Vacant	2B04	Vacant	2A04	Vacant
	1B03	Vacant	1A03	Vacant	2B03	Vacant	2A03	Vacant
	1B02	COM1	1A02	Vacant	2B02	12/24VDC	2A02	COM2
	1B01	COM1	1A01	Vacant	2B01	12/24VDC	2A01	COM2

Module front view

∗1: Pin number of 1 □□□ indicates that of the left-hand side connector, and pin number of 2 □□□ indicates that of the right-hand side connector.

4.2 QX48Y57 I/O Module

(1) DC Input Specification (Positive Common Type)

Specifications \ Type		QX48Y57 I/O Module (Input Specification)	Appearance
Number of input points		8 points	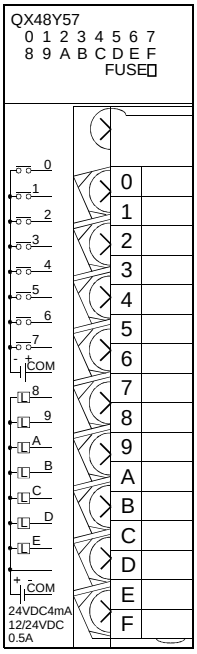
Insulation method		Photocoupler	
Rated input voltage		24VDC (+20/-15%, ripple ratio within 5%)	
Rated input current		Approx. 4mA	
Input derating		None	
ON voltage/ON current		19V or higher/3mA or higher	
OFF voltage/OFF current		11V or lower/1.7mA or lower	
Input resistance		Approx. 5.6kΩ	
Response time	OFF→ON	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms	
	ON→OFF	1ms/5ms/10ms/20ms/70ms or less (CPU parameter setting) ∗1 Initial setting is 10ms	
Dielectric maximum voltage		560VAC rms/3 cycles (altitude 2000m)	
Insulation resistance		10MΩ or more by insulation resistance tester	
Noise immunity		By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency	
		First transient noise IEC61000-4-4: 1kV	
Protection of degree		IP2X	
Common terminal arrangement		8 points/common (common terminal: TB9)	
Number of I/O occupied points		16 points (For I/O allocation on I/O mixed module, set 16 points.)	
Operation indicator		ON indication (LED)	
External connections		18-point terminal block (M3×6 screw)	
Applicable wire size		Core cable: 0.3 to 0.75mm^2 (Outside diameter: 2.8mm or smaller)	
Applicable connector terminal		R1.25-3 (Terminals with sleeve cannot be used)	
5VDC internal current consumption		80mA (TYP, all points ON)	
Weight		0.20kg	

External Connections	Terminal Block No.	Signal Name
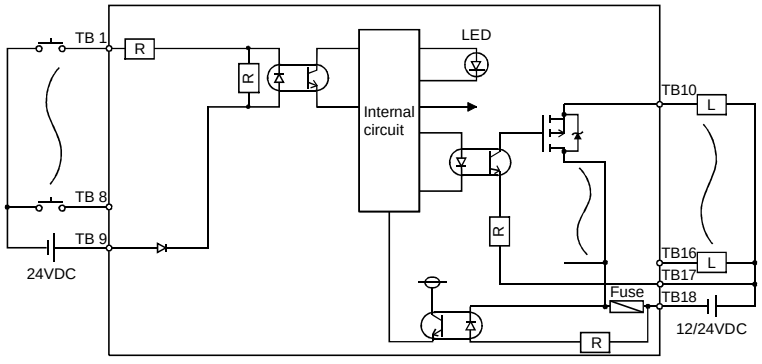	TB1	X00
	TB2	X01
	TB3	X02
	TB4	X03
	TB5	X04
	TB6	X05
	TB7	X06
	TB8	X07
	TB9	COM1
	TB10	Y08
	TB11	Y09
	TB12	Y0A
	TB13	Y0B
	TB14	Y0C
	TB15	Y0D
	TB16	Y0E
	TB17	12/24VDC
	TB18	COM2

∗1: For the setting method, refer to the Section 1.3.1.

∗2: When using the main module, use the constructions listed in Section 1.2 (13).

(2) Transistor Output Specifications (Sink Type)

Specifications \ Type		QX48Y57 I/O Module (Output Specification)
Number of output points		7 points
Insulation method		Photocoupler
Rated load voltage		12-24VDC (+20/-15%)
Max. load current		0.5A/point, 2A/common
Max. rush current		4A/10ms or less
Leakage current at OFF		0.1mA or lower
Max. voltage drop at ON		0.2VDC (TYP.) 0.5A, 0.3VDC (MAX.) 0.5A
Response time	OFF→ON	1ms or shorter
	ON→OFF	1ms or shorter (rated load, resistance load)
Surge killer		Zener diode
Fuse		4A (Not replaceable) (Fuse breakage capacity: 50A)
Fuse breakage indication		Provided (When fuse is broken, LED lights and a signal is output to CPU)＊3
External power supply	Voltage	12-24VDC (+20/-15%) (ripple ratio within 5%)
	Current	10mA (at 24VDC)
Common terminal arrangement		7 points/common (common terminal: TB18)

＊3: When the external power supply is turned off, fuse breakage is not detected.

4 - 4

5. INTERRUPT MODULE

5.1 QI60 Interrupt Module

Specifications \ Type			Interrupt Module				
			QI60				Appearance
Number of input points			16 points				
Isolation method			Photocoupler				
Rated input voltage			24VDC (+20/-15%, ripple ratio within 5%)				
Rated input current			Approx. 6mA				
Input derating			No				
ON voltage/ON current			19V or higher/4.0mA or higher				
OFF voltage/OFF current			11V or lower/1.7mA or lower				
Input impedance			Approx. 3.9kΩ				
Response time	Set value ＊1		0.1	0.2	0.4	0.6	1
	OFF to ON	Typ	0.05ms	0.15ms	0.30ms	0.55ms	1.05ms
		max	0.10ms	0.20ms	0.40ms	0.60ms	1.20ms
	ON to OFF	Typ	0.15ms	0.20ms	0.35ms	0.60ms	1.10ms
		max	0.20ms	0.30ms	0.50ms	0.70ms	1.30ms
Dielectric withstand voltage			560VAC rms/3 cycles (altitude 2000m (6557.38ft.))				
Insulation resistance			10MΩ or more by insulation resistance tester				
Noise immunity			By noise simulator of 500Vp-p noise voltage, 1μs noise width and 25 to 60Hz noise frequency				
			First transient noise IEC61000-4-4: 1kV				
Protection of degree			IP2X				
Common terminal arrangement			16 points/common (common terminal: TB17)				
Number of I/O points			16 (I/O allocation is set as a 16-points interrupt module) ＊4				
Interrupt processing condition			Set by setting the CPU parameter switch. ＊3				
Operation indicator			ON indication (LED)				
External connections			18-point terminal block (M3×6 screws)				
Applicable wire size			0.3 to 0.75mm^2 core (2.8mm (0.11in.) OD max.)				
Applicable crimping terminal			R1.25-3 (sleeved crimping terminals cannot be used.)				
5VDC internal current consumption			60mA (TYP. all points ON)				
Weight			0.20kg				

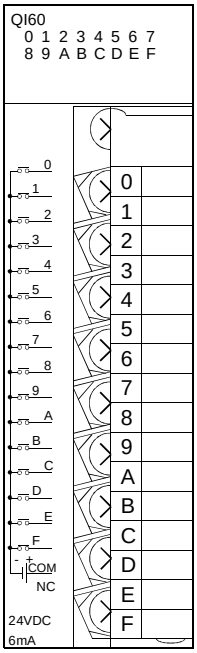

External Connections	Terminal Block Number	Signal Name
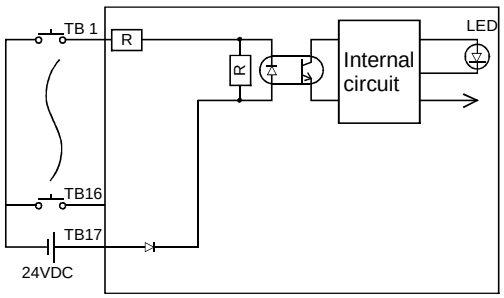	TB1	X00
	TB2	X01
	TB3	X02
	TB4	X03
	TB5	X04
	TB6	X05
	TB7	X06
	TB8	X07
	TB9	X08
	TB10	X09
	TB11	X0A
	TB12	X0B
	TB13	X0C
	TB14	X0D
	TB15	X0E
	TB16	X0F
	TB17	COM
	TB18	Vacant

＊1: For usage of the main module, refer to the QCPU (Q-mode) User's Manual (Function Explanation/Program Basics Version).
＊2: Use the CPU parameter settings to select. (Default: 0.2ms). Refer to Section 1.3.1 for the setting method.
＊3: For the setting method, refer to the section 1.3.3.
＊4: When making settings with an SW5D5C-GPPW or earlier GX Developer, select "16 point intelligent module."

MEMO

5 - 2

6. BLANK COVER MODULE

This chapter provides the specifications of the blank cover module used to protect the vacant slot (between I/O modules) of the base module from dust.

Table 6.1 Blank Cover Module Specifications

Item \ Type	QG60
Number of I/O points occupied	16 points
I/O allocation	16 vacant points
Application	Used as a dustproof cover for a slot not loaded with an I/O module (especially a vacant slot between modules).
External dimensions (mm (inch))	98 (3.86) (H) × 27.4 (1.08) (W) × 90 (3.55) (D)
Weight (kg)	0.07

* Load the blank cover module with the connector cover of the base module fitted.

6 - 1

MEMO

6 - 2

7. CONNECTORS

The 40-pin connectors and 37-pin D-sub connectors used with the input and output modules are to be user-prepared.
The following tables list the connector types and applicable models, and introduce crimp-contact and pressure-displacement tools.

(1) 40-pin connectors

(a) 40-pin connectors

Type	Model Name	Applicable Wire Size	Applicable Model
Soldering type connector	A6CON1	0.3mm^2 (AWG#22)	QX41, QX41-S1, QX42, QX42-S1, QX71, QX72, QX82, QY41P, QY42P, QY71, QH42P
Crimp-contact type connector	A6CON2	AWG#24 to 28	
Pressure-displacement type connector	A6CON3	AWG#28 (twisted) AWG#30 (single wire)	
Soldering type connector	A6CON4	0.3mm^2 (AWG#22)	

(b) 40-pin connector crimp-contact and pressure-displacement tools

Type	Model Name	Contact
Crimp-contact tool	FCN-363T-T005/H	FUJITSU COMPONENT LIMITED
Pressure-displacement tool	FCN-367T-T012/H (locator plate)	
	FCN-707T-T001/H (cable cutter)	
	FCN-707T-T101/H (hand press)	

(2) 37-pin D-sub connectors

(a) 37-pin D-sub connectors

Type	Model Name	Applicable Wire Size	Applicable Model
Soldering type connector	A6CON1E	0.3mm^2 (AWG#22)	QX81, QY81P
Crimp-contact type connector	A6CON2E	AWG#24 to 24	
Pressure-displacement type connector	A6CON3E	AWG#28 (twisted) AWG#30 (single wire)	

(b) 37-pin D-sub connector crimp-contact and pressure-displacement tools

<table>
<tr><th>Type</th><th>Model Name</th><th>Contact</th></tr>
<tr><td>Crimp-contact tool</td><td>90312-1</td><td rowspan="4">AMP Incorporated

Americas:
Worldwide Headquarters of
AMP Incorporated
Harrisburg, PA, U.S.A.
Phone: (717) 564-0100
Fax: (717) 986-7813

Far East:
AMP Singapore Pte. Ltd.
Singapore
Phone: (65) 482-0311
Fax: (65) 482-1012

Europe:
AMP Deutschland G.m.b.H.
Langen, Germany
Phone: (49) 6103-7090
Fax: (49) 6103-709223</td></tr>
<tr><td rowspan="3">Pressure-displacement tool</td><td>91257-1 (die set)</td></tr>
<tr><td>91220-1 (cable cutter)</td></tr>
<tr><td>91085-2 (hand mini-press)</td></tr>
</table>

7 - 2

8. SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES

8.1 Specifications of Connector/Terminal Block Convertor Modules

This chapter explains the specifications of connector/terminal block convertor modules.

(1) Connector/Terminal Block Convertor Module Specifications

Type	Details	Weight	Applicable Models
A6TBXY36	For positive common type input modules and sink type output modules (standard type)	0.4kg	Q series: QX41, QX41-S1, QX42, QX42-S1, QY41P, QY42P, QH42P AnS series: A1SX41, A1SX41-S1, A1SX41-S2, A1SX42, A1SX42-S1, A1SX42-S2, A1SX42, A1SX82-S1 A1SY41, A1SY42, A1SY82, A1SH42, A1SH42-S1 A series: AX42, AX42-S1, AY42, AY42-S1, AY42-S2, AY42-S3, AY42-S4, AH42 CC-Link: AJ65SBTCF1-32D, AJ65SBTCF1-32T, AJ65SBC1-32D AJ65SBC1-32T MELSECNET-MINI: AJ35TC1-32D, AJ35TC1-32T
A6TBXY54	For positive common type input modules and sink type output modules (2-wire type)	0.5kg	
A6TBX70	For positive common type input modules (3-wire type)	0.6kg	Q series: QX41, QX41-S1, QX42, QX42-S1, QH42P AnS series: A1SX41, A1SX41-S1, A1SX41-S2, A1SX42, A1SX42-S1, A1SX42-S2, A1SX42, A1SX82-S1, A1SH42, A1SH42-S1 A series: AX42, AX42-S1, AH42 CC-Link: AJ65SBTCF1-32D, AJ65SBC1-32D MELSECNET-MINI: AJ35TC1-32D
A6TBX36-E	For negative common type input modules (standard type)	0.4kg	Q series: QX81 AnS series: A1SX81, A1SX81-S1, A1SX81-S2 A series: AX82
A6TBX54-E	For negative common type input modules (2-wire type)	0.5kg	
A6TBX70-E	For negative common type input modules (3-wire type)	0.6kg	
A6TBY36-E	For source type output modules (standard type)	0.4kg	Q series: QY81P AnS series: A1SY81 A series: AY82EP
A6TBY54-E	For source type output modules (2-wire type)	0.5kg	

(2) Cable

Type	Details	Weight	Applicable Models
AC05TB	0.5 m (19.69 in.), for sink modules	0.17kg	A6TBXY36 A6TBXY54 A6TBX70
AC10TB	1 m (39.37 in.), for sink modules	0.23kg	
AC20TB	2 m (78.74 in.), for sink modules	0.37kg	
AC30TB	3 m (118.11 in.), for sink modules	0.51kg	
AC50TB	5 m (196.85 in.), for sink modules	0.76kg	
AC80TB	8 m (314.96 in.), for sink modules (common current not exceeding 0.5 A)	1.2kg	
AC100TB	10 m (393.7 in.), for sink modules (common current not exceeding 0.5 A)	1.5kg	
AC05TB-E	0.5 m (19.69 in.), for source modules	0.17kg	A6TBX36-E A6TBY36-E A6TBX54-E A6TBY54-E A6TBX70-E
AC10TB-E	1 m (39.37 in.), for source modules	0.23kg	
AC20TB-E	2 m (78.74 in.), for source modules	0.37kg	
AC30TB-E	3 m (118.11 in.), for source modules	0.51kg	
AC50TB-E	5 m (196.85 in.), for source modules	0.76kg	

IMPORTANT

(1) The number of connectable I/O points is 32 for all connector/terminal block convertor modules.
Two connector/terminal block convertor modules and two cables for connector/terminal block convertor modules are required for 64-point I/O modules.

(2) Though the A1SX81(S1/S2) is used either as a sink or source type, use the A6TBX36-E, A6TBX54-E or A6TBX70-E.
The A6TBXY36, A6TBXY54 or A6TBX70 cannot be used.

(3) Though the A1SX82-S1 is used either as a sink or source type, the A6TBXY36/XY54/X70 may be used only when the A1SX82-S1 is used as a sink type.
When it is used as a source type, the A6TBXY36/XY54/X70 cannot be used.

(4) Though the A1SY82 is a source type output module, use theA6TBXY36 or A6TBXY54. The A6TBXY36-E or A6TBXY54-E cannot be used.

(5) In the A series, the plus common input module is separately labeled as a sink type input module, and the minus common input module is separately labeled as a source type input module.

(6) When using the A6TBXY70 as a mixed input/output module, use at the input side.

(7) Tighten the module terminal screws to the following torque.
Supply line connecting terminal screw (M3.5 screw): Tightening torque 78.4N•cm

8 - 2

8.2 Connector/Terminal Block Convertor Module Connection Diagrams

8.2.1 A6TBXY36

(1) When connecting an input module

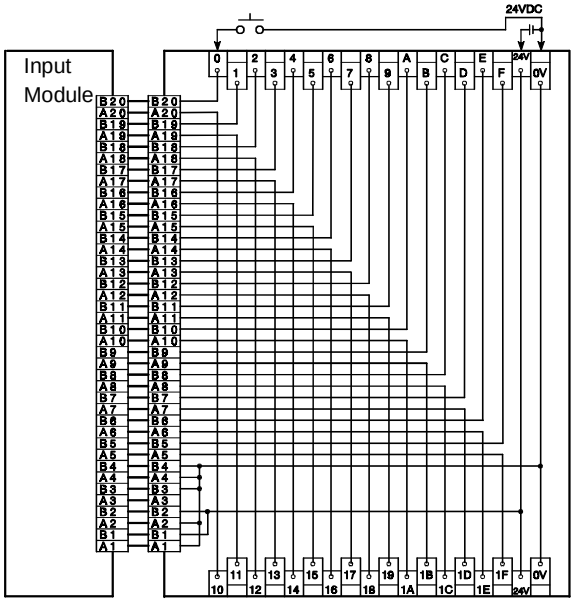

(2) When connecting an output module

(a) Sink Type

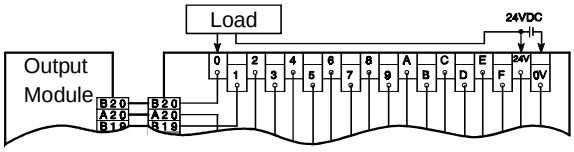

(b) Source Type

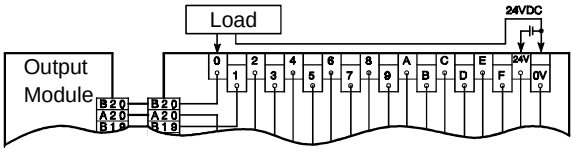

8.2.2 A6TBXY54

(1) When connecting an input module

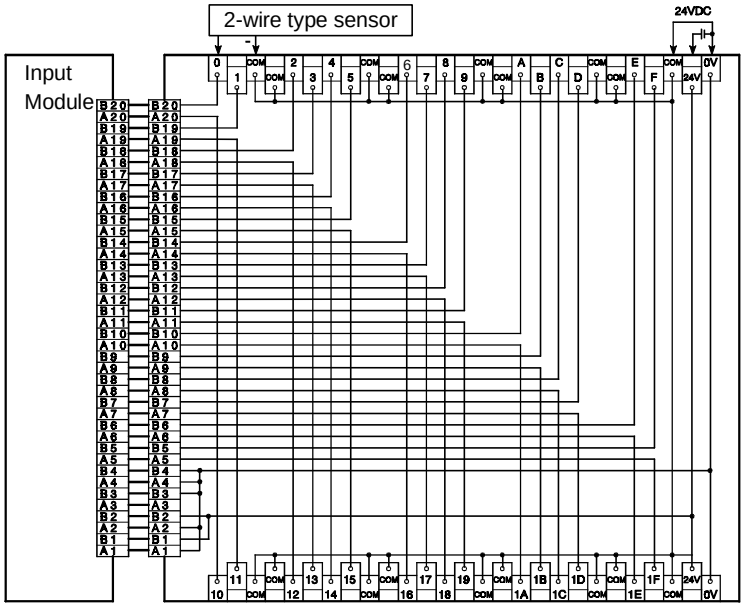

(2) When connecting an output module

(a) Sink Type

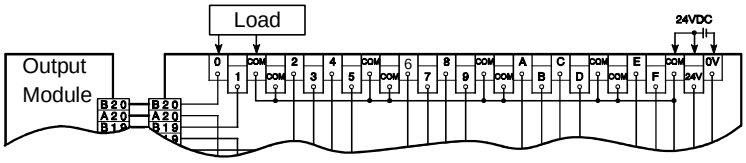

(b) Source Type

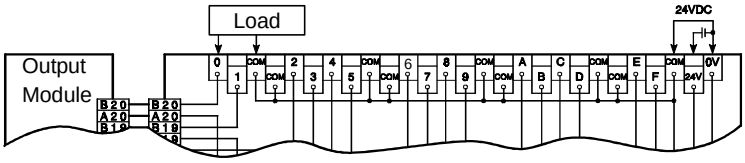

8 - 4

8.2.3 A6TBX70

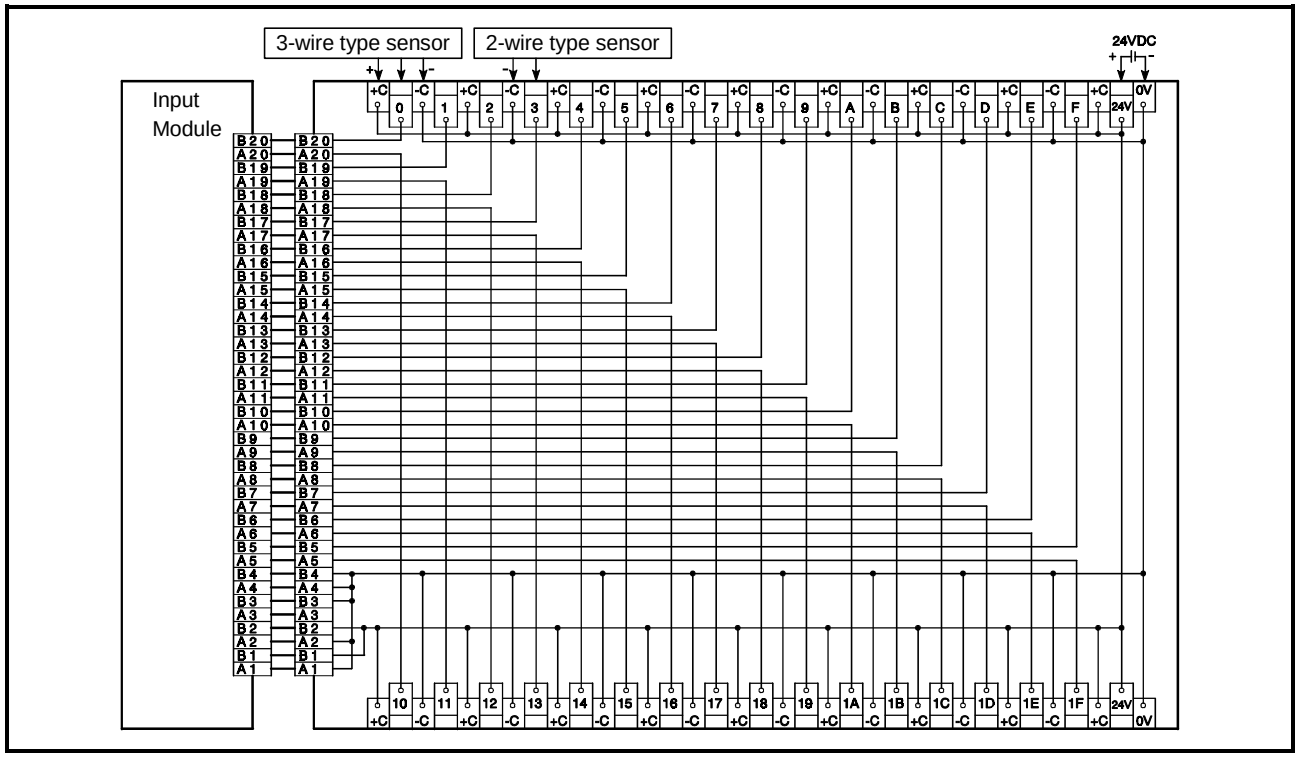

8.2.4 A6TBX36-E

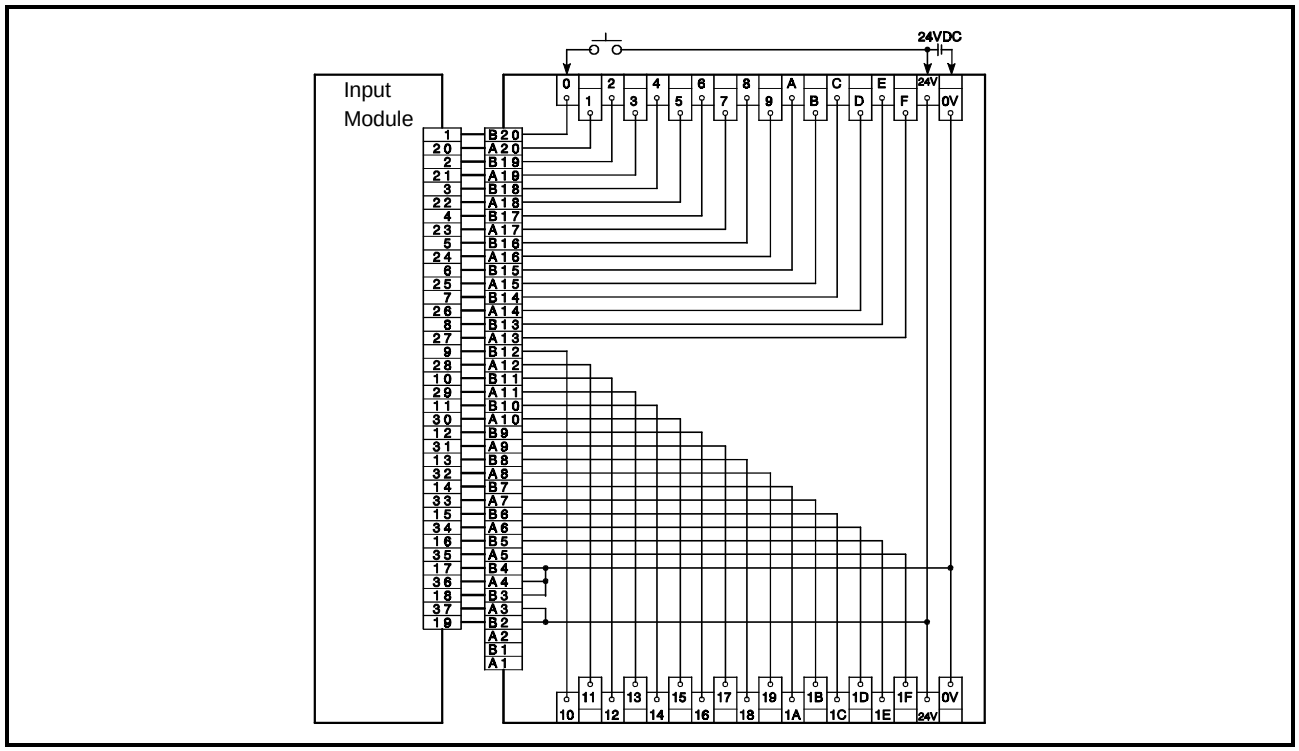

8.2.5 A6TBY36-E

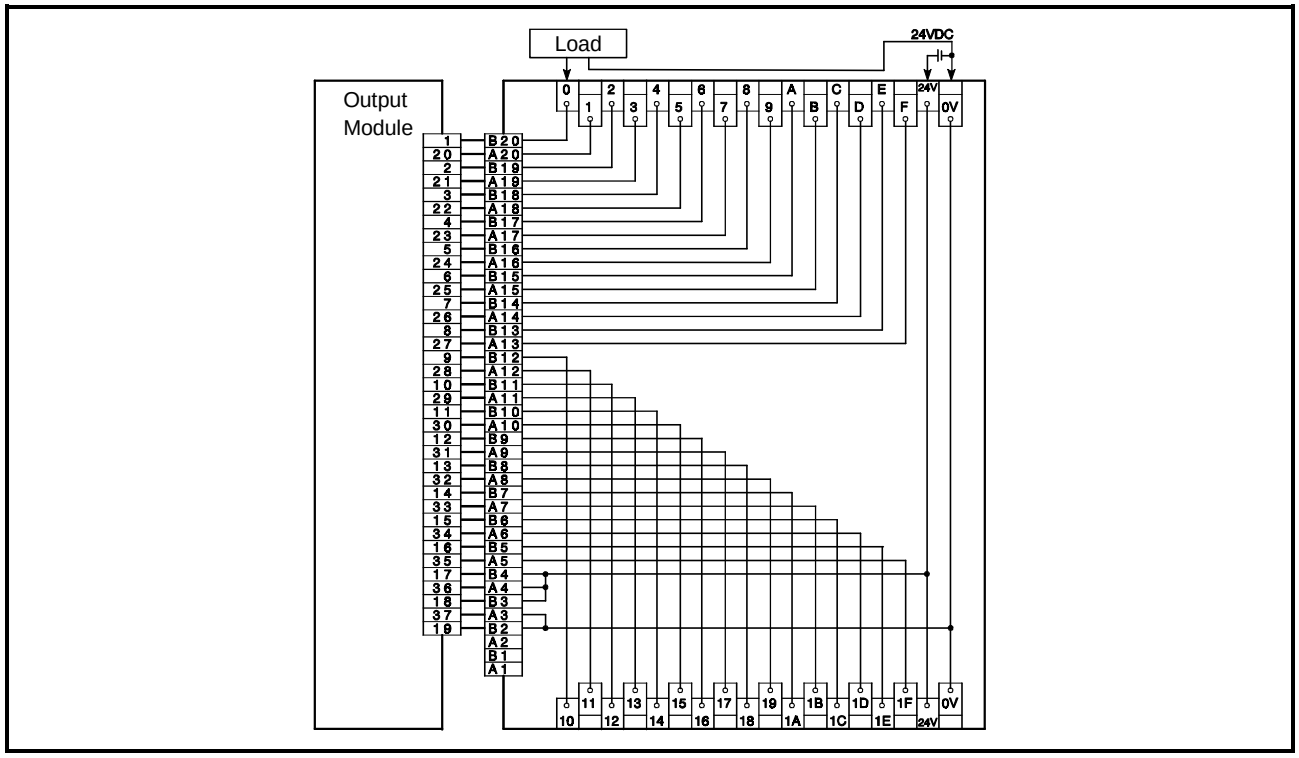

8.2.6 A6TBX54-E

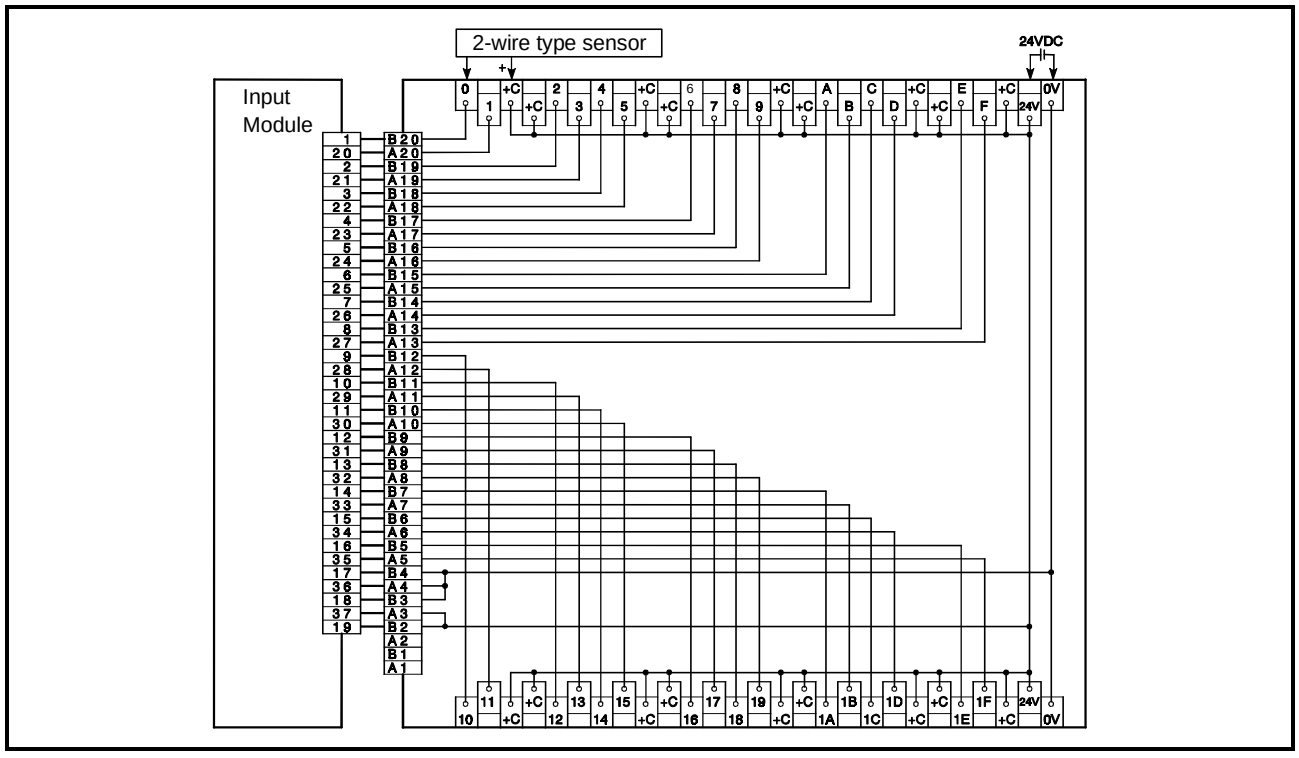

8.2.7 A6TBY54-E

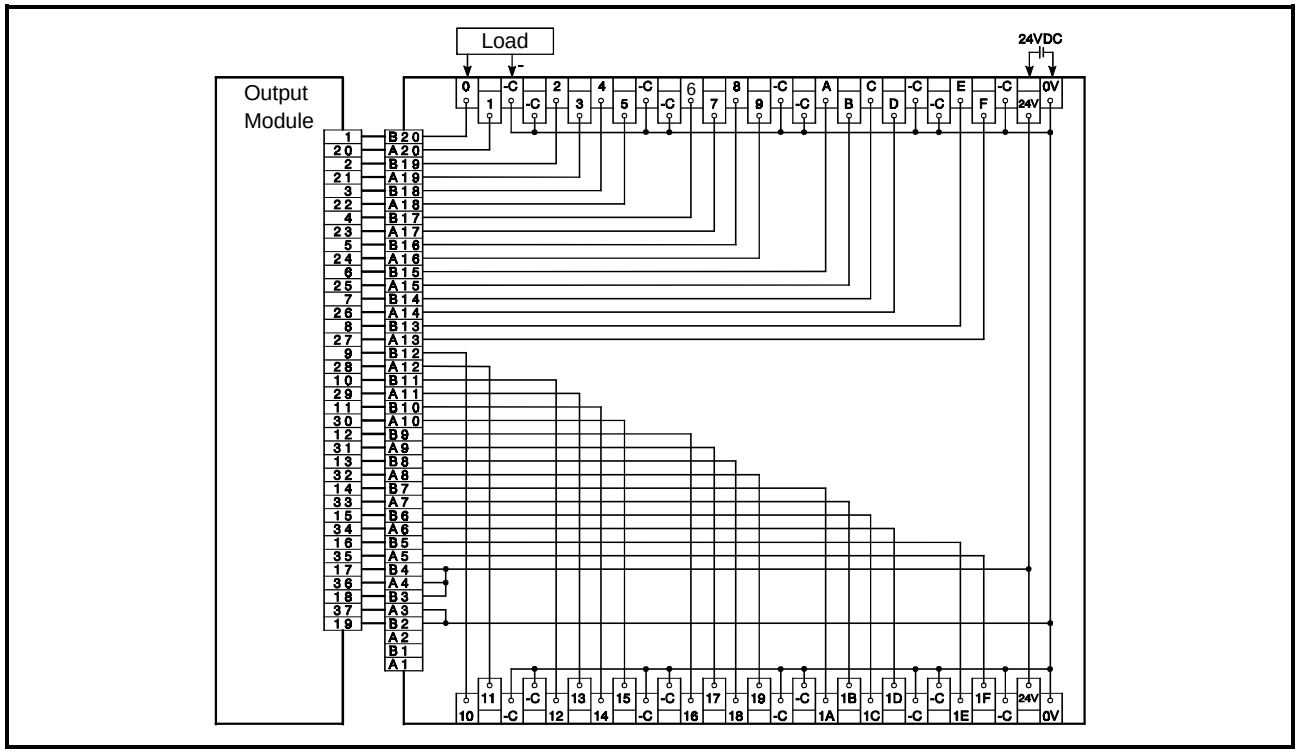

8.2.8 A6TBX70-E

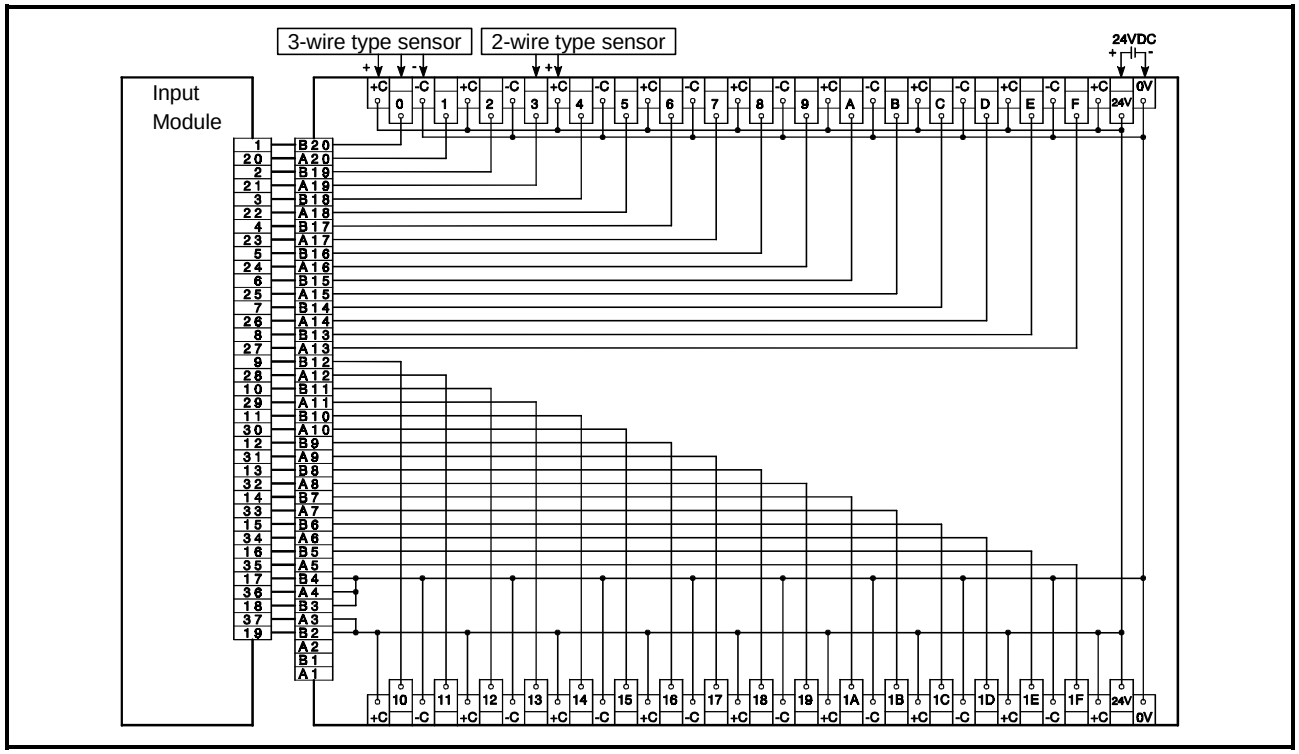

9. SPRING CLAMP TERMINAL BLOCK

9.1 Q6TE-18S

The Q6TE-18S shall be used attached to a Q Series terminal block type I/O module or an intelligent function module.
Since the Q6TE-18S uses a spring clamp it does not require screw tightening, which greatly reduces the number of wiring procedures.

(1) Compatible Models

The QT6E-18S can be used with the following models:

Model type	Model name					
I/O module	QX10 QY10 QY70	QX28 QY18A QY80	QX40 QY22 QX48Y57	QX40-S1 QY40P QI60	QX70 QY50	QX80 QY68A
Intelligent function module	Q62DA Q64AD Q64TCRT	Q64DA Q68ADV Q64TCRTBW	Q68DAV Q68ADI Q64RD	Q68DAI		

POINT

The terminal numbers of the Q6TE-18S correspond to the terminal numbers on the compatible module.
For the signal names corresponding to the terminal numbers when connected to an external device, please refer to the User's Manual of the module to use.

(2) Specifications

Item	Specifications
Applicable wire size	0.3 to 1.5 mm^2 (AWG22 to 16)
Wire strip length	8 to 11 mm
Mounting screw tightening torque range	66 to 89 N•cm
Weight	0.07kg

(3) Removal of Terminal Block and Installation of Q6TE-18S

(a) Removal of terminal block

- Unscrew the two terminal block mounting screws situated at the top and bottom of the terminal block.
- Gently remove the terminal block.

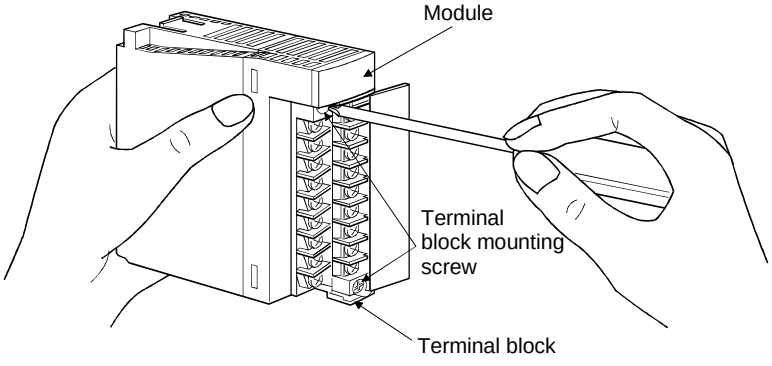

(b) Installation of Q6TE-18S

- Attach the Q6TE-18S to the module.
- Tighten the terminal block mounting screws within the specified torque range.

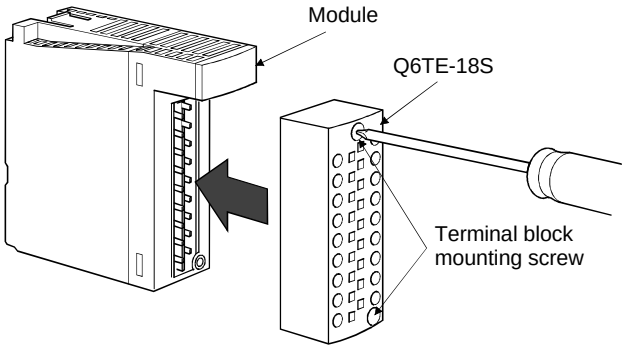

(c) Cable Installation

Insert the tool into the square shaped hole, which corresponds to the terminal you wish to use.
While the tool is inside the hole, insert the wire into the circular shaped hole (as shown below).
Remove the tool from the square shaped hole, taking care not to remove the wire.
After the wire has been clamped, gently pull the wire to confirm that it is secure.

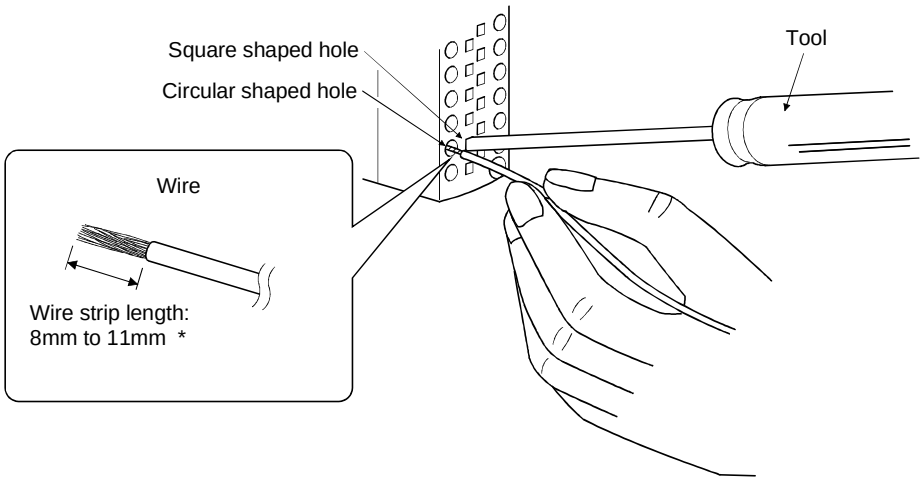

[Cautions]

* Take care that the wire strip length is between 8mm to 11mm.
  If the wire strip length is too long, this will expose the bare wire, which increases the risk of electric shock or short circuit.
  If the wire strip length is too short, this will result in the wire not being securely attached.

(d) Cable removal

Insert the tool into the corresponding square shaped hall until it stops.
Pull the wire out of the hall completely.

10. NAMES OF MODULE PARTS

This chapter explains the names of the I/O module parts.

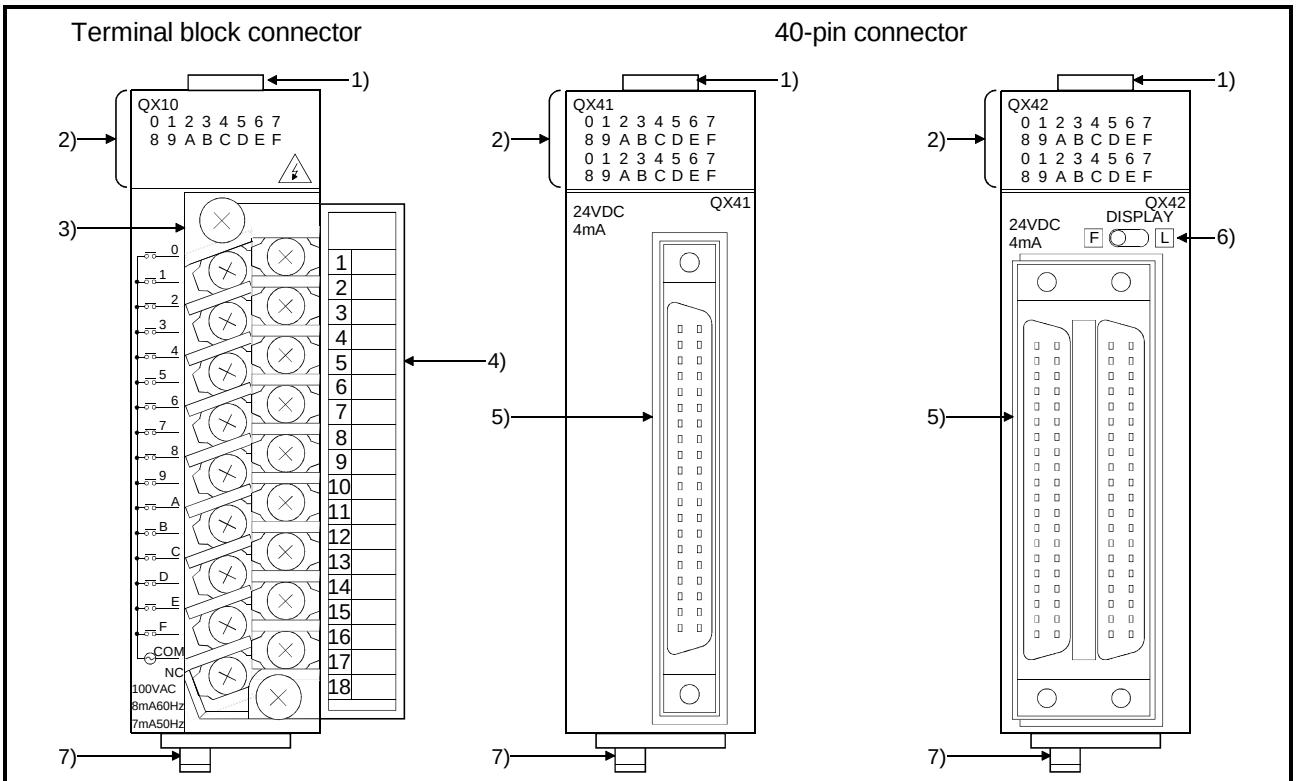

No.	Name	Description
1)	Module fixing hook	Hook used to fix the module to the base unit. (Single-motion installation)
2)	I/O indicator LED	Indicates the ON/OFF status of I/O and lit when I/O is ON.
3)	Terminal block	Used to connect power and I/O signal wires.
4)	Terminal cover	Terminal cover with recording paper
5)	40-pin connector	Designed for 32- or 64-point module and used to connect power and I/O signal wires.
6)	Indication selector switch	Used to switch the LED indications between the first-half 32 points and latter-half 32 points of a 64-point module.
7)	Module loading lever	Used to load the module into the base unit.

10 - 1

37-pin D-sub connector

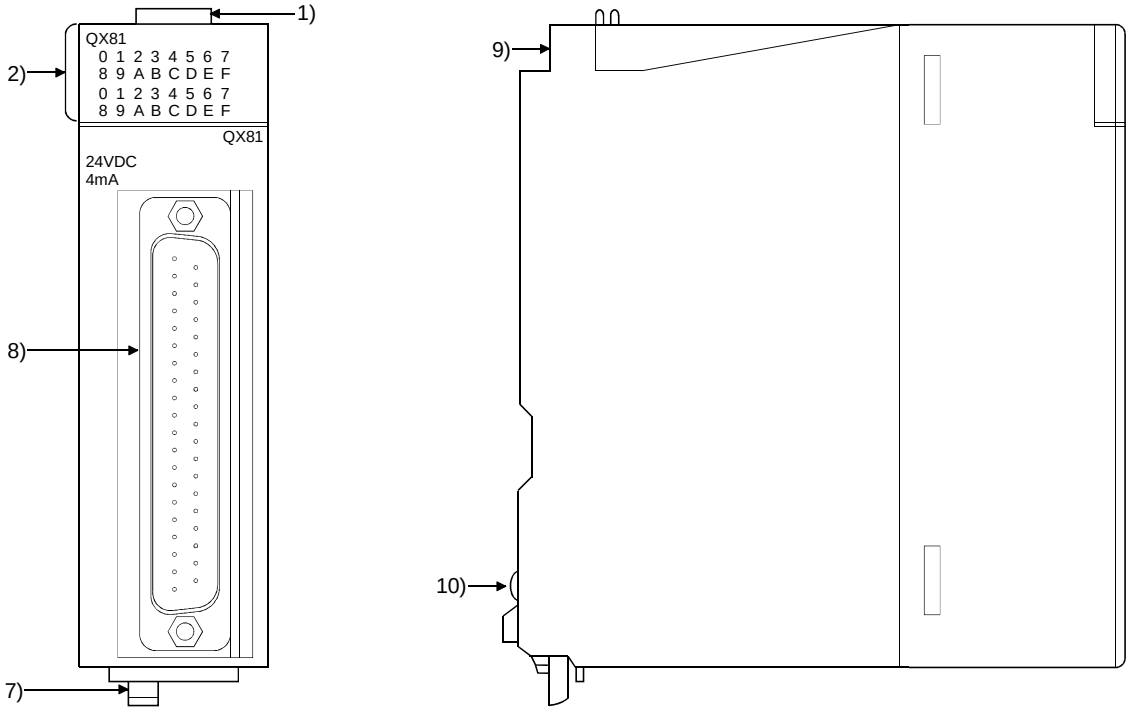

No.	Name	Description
8)	37-pin D-sub connector	Designed for 32 points and used to connect power and I/O signal wires.
9)	Module fixing screw hole	Used to fix the module to the base unit.
10)	Metal fitting	Do not touch as this may be deformed.

10 - 2

A6TB □ 36 □

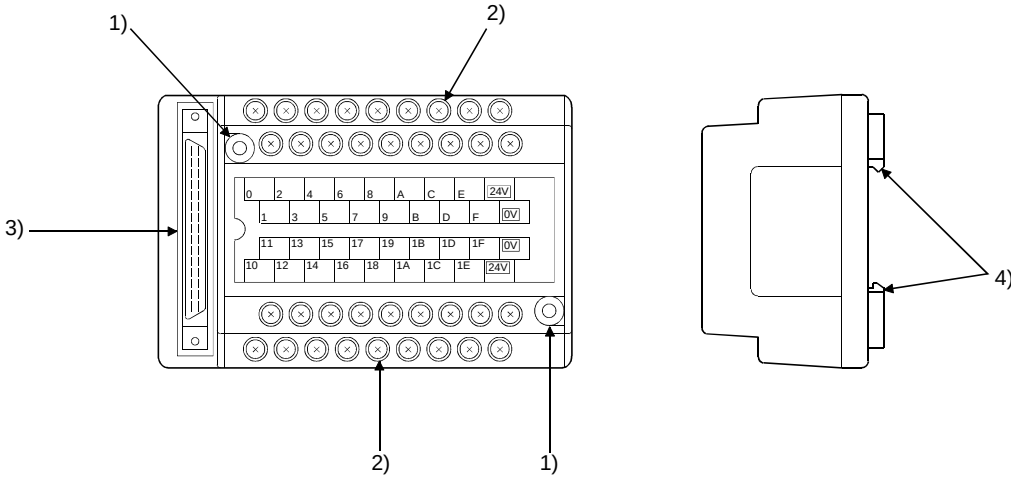

A6TB □ 54 □

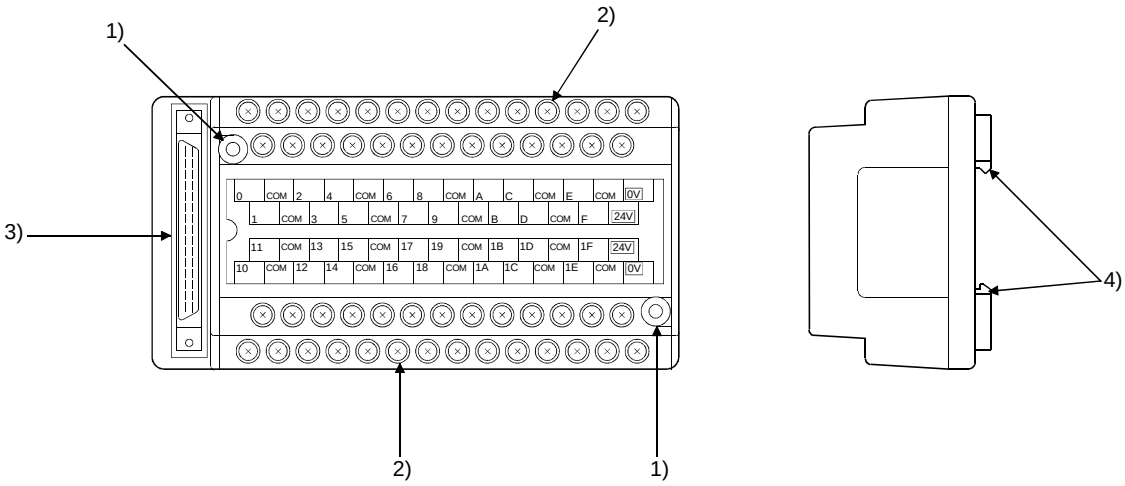

No.	Name	Description
1)	Panel mounting hole	Used for mounting to panel (for M4 screw).
2)	Terminal block	Used to connect power and signal wires.
3)	40-pin connector	Designed for 32-point module and used to connect power and I/O signal wires.
4)	Module fixing hook	Used for mounting onto DIN rail.

10 - 3

A6TBX70 □

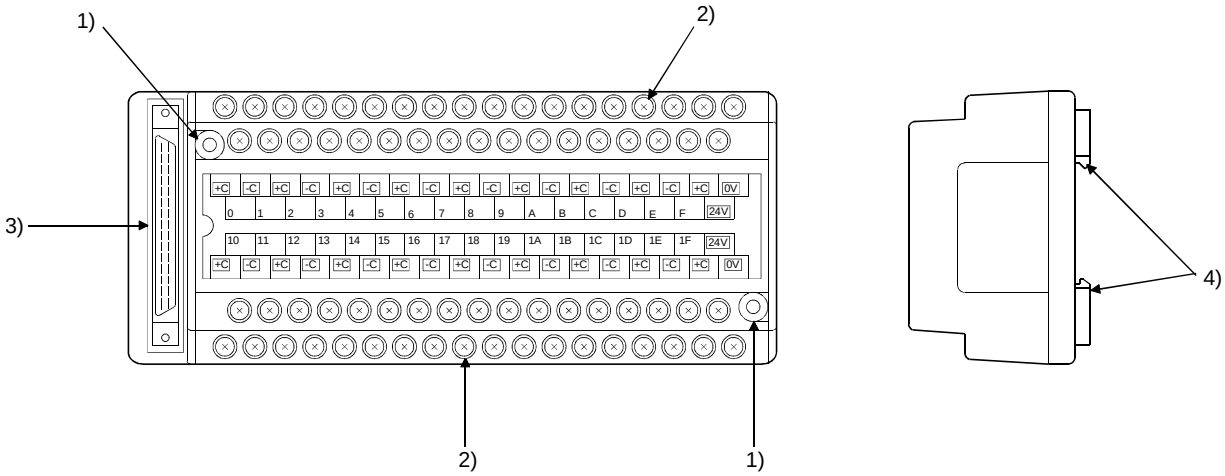

No.	Name	Description
1)	Panel mounting hole	Used for mounting to panel (for M4 screw).
2)	Terminal block	Used to connect power and signal wires.
3)	40-pin connector	Designed for 32-point module and used to connect power and I/O signal wires.
4)	Module fixing hook	Used for mounting onto DIN rail.

Q6TE-18S

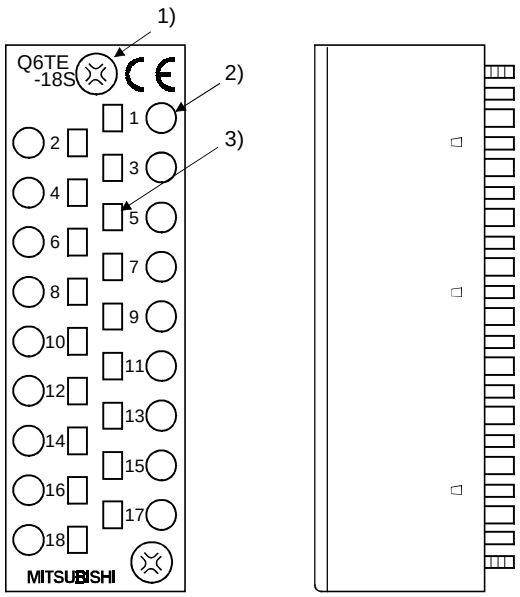

No.	Name	Description
1)	Terminal block mounting screw	This is for securing Q6TE-18S terminal block to a module
2)	Circular shaped hole	A hole for inserting wire when wiring
3)	Square shaped hole	A hole for inserting a tool when wiring

11. I/O MODULE TROUBLESHOOTING

This chapter explains possible problems with I/O circuits and their corrective actions.

11.1 Input Circuit Troubleshooting

This section describes possible problems with input circuits and their corrective actions.

Table 11.1 Input Circuit Problems and Corrective Actions

	Condition	Cause	Corrective Action
Example 1	Input signal does not turn OFF.	• Leakage current of input switch (e.g. drive by non-contact switch). 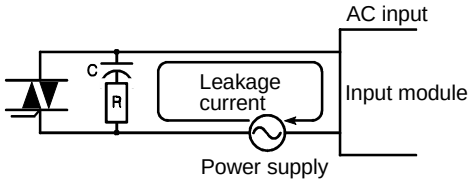	• Connect an appropriate resistor which will make the voltage across the terminals of the input module lower than the OFF voltage value.  It is recommended to use 0.1 to 47μF + 47 to 120Ω (1/2W) for the CR constant.
Example 2	Input signal does not turn OFF.	• Drive by a limit switch with neon lamp. 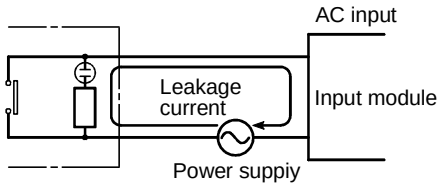	• Same as Example 1. • Or make up another independent display circuit.
Example 3	Input signal does not turn OFF.	• Leakage current due to line capacity of wiring cable. (Line capacity C of twisted pair wire is approx. 100 PF/m). 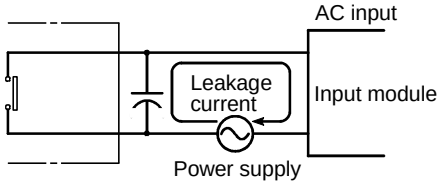	• Same as Example 1. • However, leakage current is not generated when the power supply is located in the input equipment side as shown below. 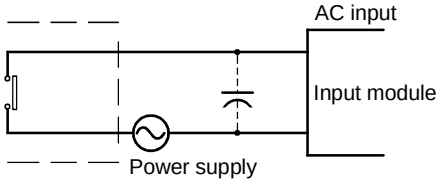

11 - 1

11

Table 11.1 Input Circuit Problems and Corrective Actions (Continued)

	Condition	Cause	Corrective Action
Example 4	Input signal does not turn OFF.	• Drive by switch with LED indicator. 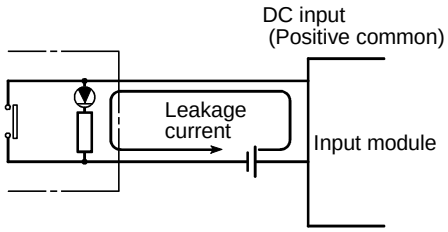	• Connect a register which will make the voltage between the input module terminal and common lower than the OFF voltage, as shown below. 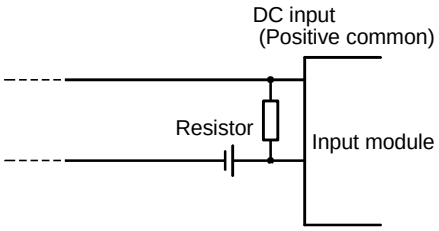 * A calculation example of a value for a connected resistor is given on the following page.
Example 5	Input signal does not turn OFF.	• Sneak path due to the use of two power supplies. 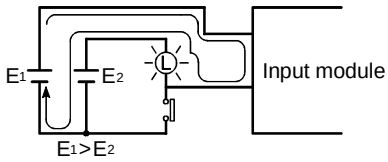	• Use only one power supply. • Connect a sneak path prevention diode. (Figure below) 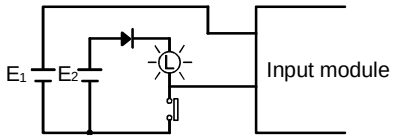
Example 6	False input due to noise	Depending on response time setting, noise is imported as input.	Change response time setting. Example 1ms → 5ms (Setting of a shorter response time may produce a higher effect on periodic excessive noise.) If no effects are produced by the above, take basic actions to prevent excessive noise from entering, e.g. avoid bundling the power and I/O cables, and suppress noise by adding surge absorbers to such noise sources as relays and contactors used with the same power supply.)

<Calculation example of Example 4>

Consider a switch with LED indicator connected to the QX40, giving a leakage current of 4mA when a 24VDC power is turned on.

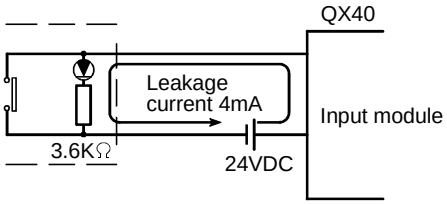

(1) The 1.7mA OFF current of the QX40 is not satisfied. Hence, connect a resistor as shown below.

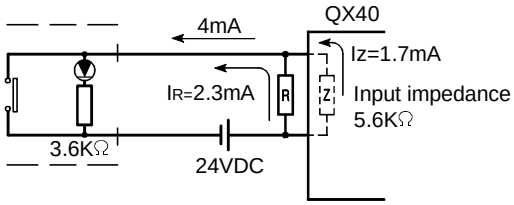

(2) Calculate the resistor value R as indicated below.
To satisfy the 1.7mA OFF current of the QX40, the resistor R to be connected may be the one where 2.3mA or more will flow.

I_R: I_Z=Z (Input impedance): R

$$R \leqq \frac{I_Z}{I_R} \times Z \text{ (Input impedance)} = \frac{1.7}{2.3} \times 5.6 = 4.14[k\Omega]$$

R<4.14kΩ.
Assuming that resistor R is 3.9kΩ, the power capacity W of resistor R is:

$W = (\text{input voltage})^2 \div R = 28.8^2 \div 3900 = 0.2(W)$

(3) The power capacity of the resistor selected is 3 to 5 times greater than the actual current consumption. A 3.9 (kΩ), 0.6 to 1.0 (W) resistor may therefore be connected to the terminal in question.

11.2 Output Circuit Troubleshooting

This section describes possible problems with output circuits and their corrective actions.

Table 11.2 output Circuit Problems and Corrective Actions

	Condition	Cause	Corrective Action
Example 1	When the output is OFF, excessive voltage is applied to the load.	• Load is half-wave rectified inside (in some cases, this is true of a solenoid). 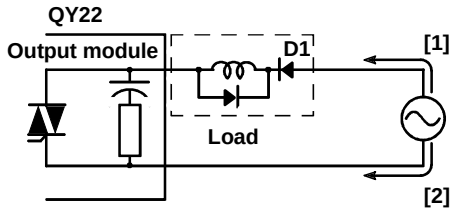 • When the polarity of the power supply is as shown in [1], C is charged. When the polarity is as shown in [2], the voltage charged in C plus the line voltage are applied across D1. Max. voltage is approx. 2.2E. (If a resistor is used in this way, it does not pose a problem to the output element. But it may cause the diode, which is built into the load, to deteriorate, resulting in a fire, etc.)	• Connect a resistor several tens to hundreds of kΩ across the load. 
Example 2	The load does not turn OFF (triac output).	• Leakage current due to built-in noise suppression. 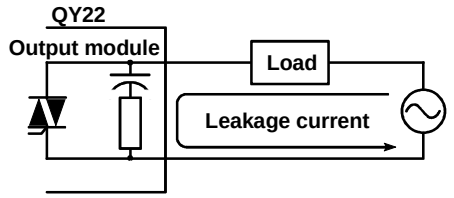	• Connect C and R across the load. (When the wiring distance from the output card to the load is long, there may be a leakage current due to the line capacity.) 

APPENDICES

Appendix 1 External Dimensional Drawings

Appendix 1.1 I/O modules

(1) Terminal block connector type

(a) Other than QY22

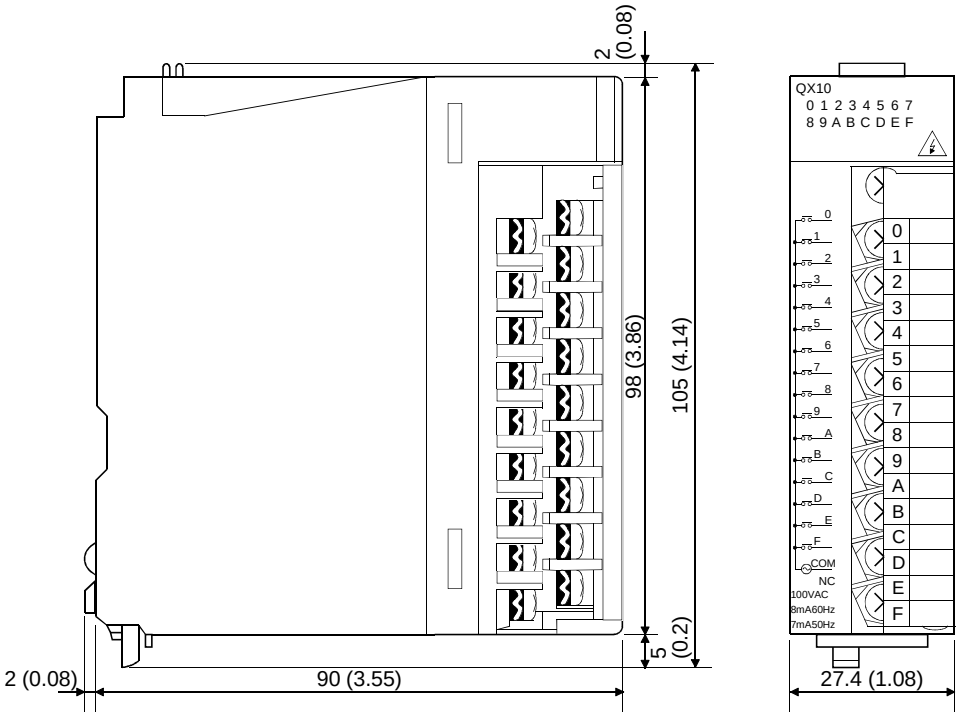

(b) QY22 TRIAC Output Module

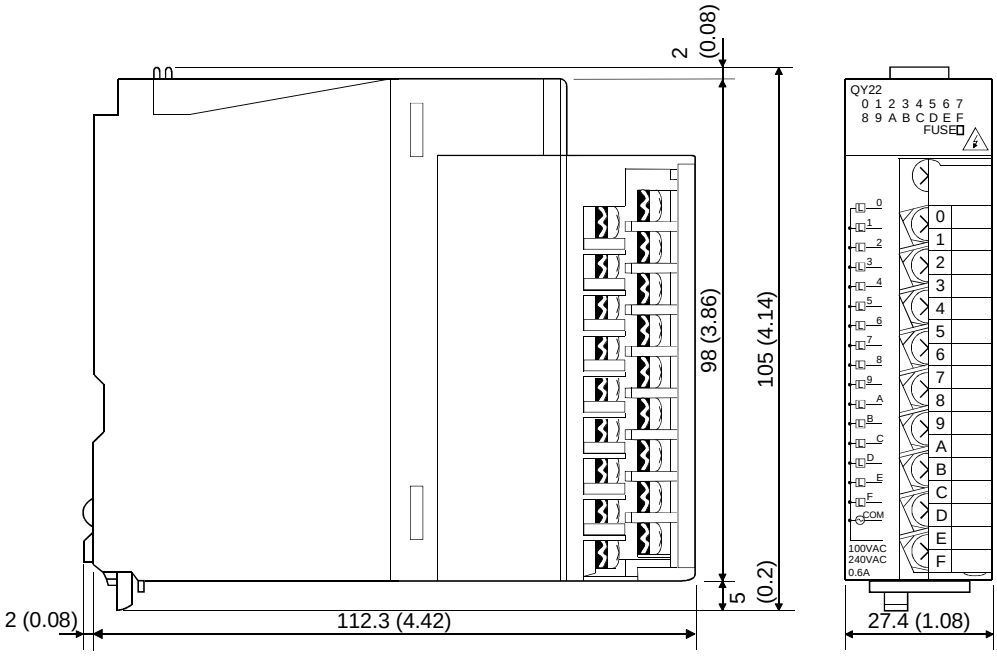

Unit: mm (inch)

APP.

(2) 40-pin connector type

(a) 32-point I/O module

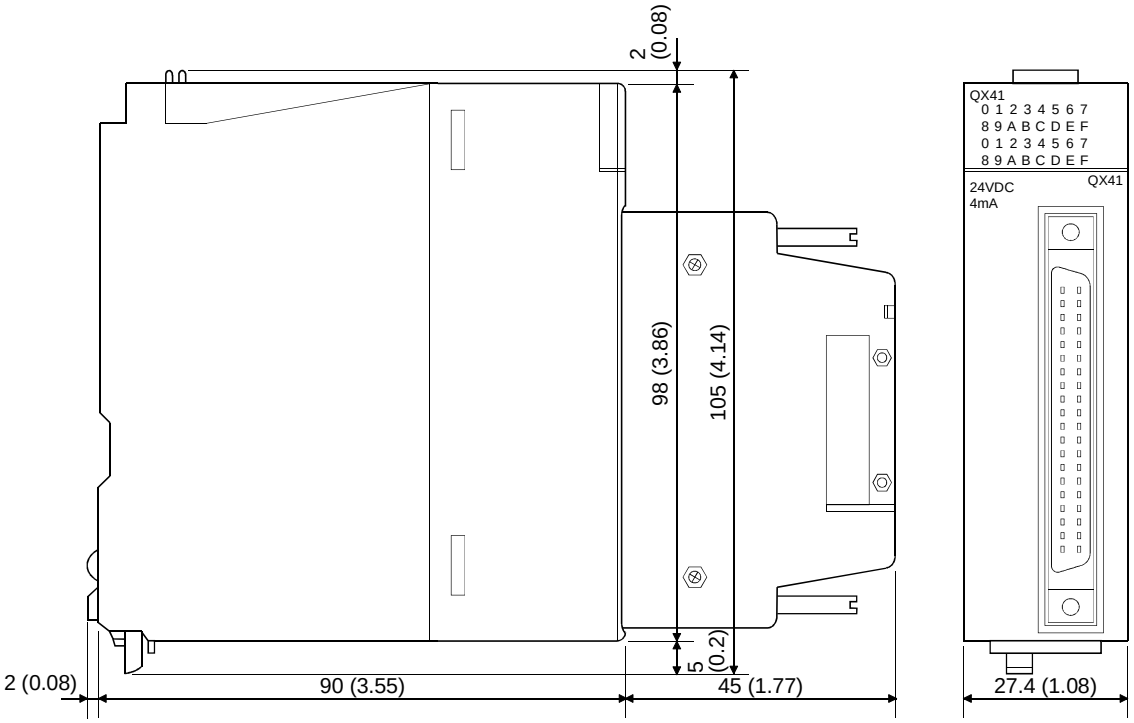

(b) 64-point I/O module

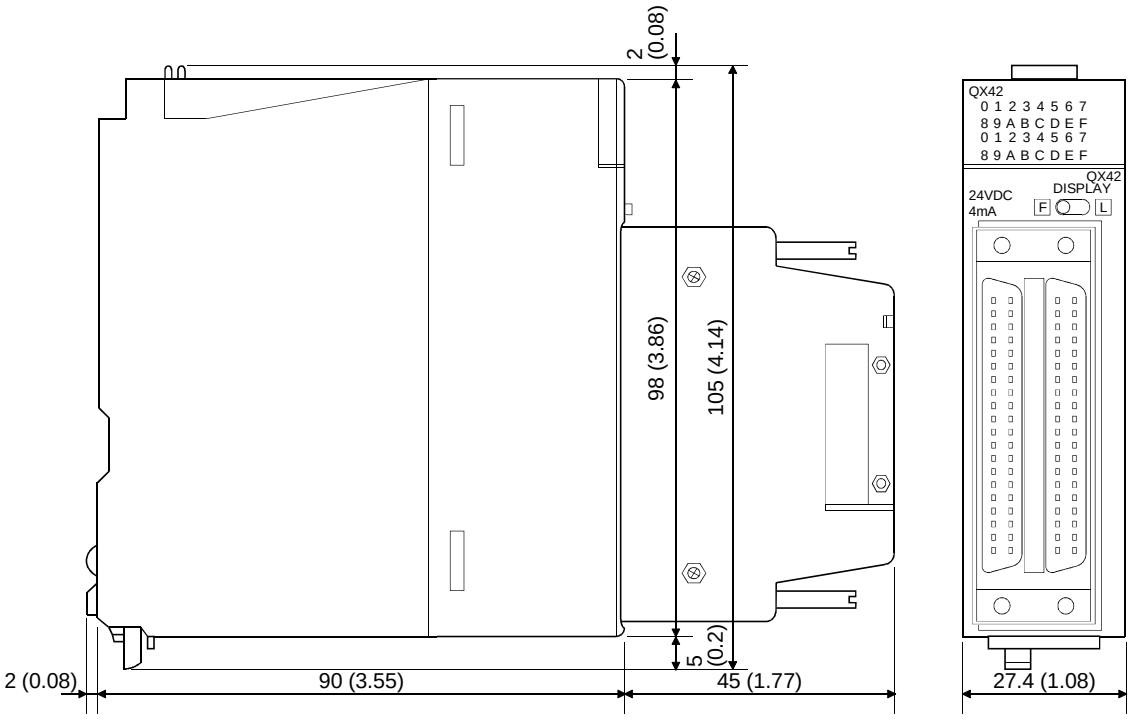

Unit: mm (inch)

App - 2

(3) 37-pin D-sub connector type 32-point I/O module

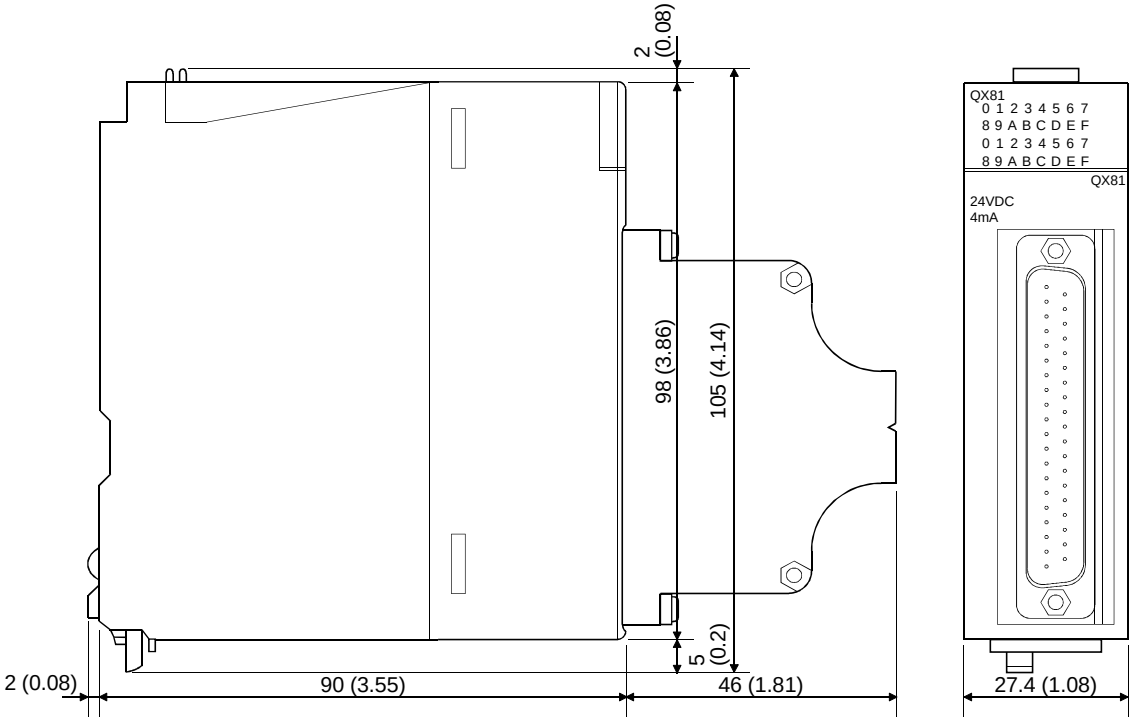

(4) Blank cover module

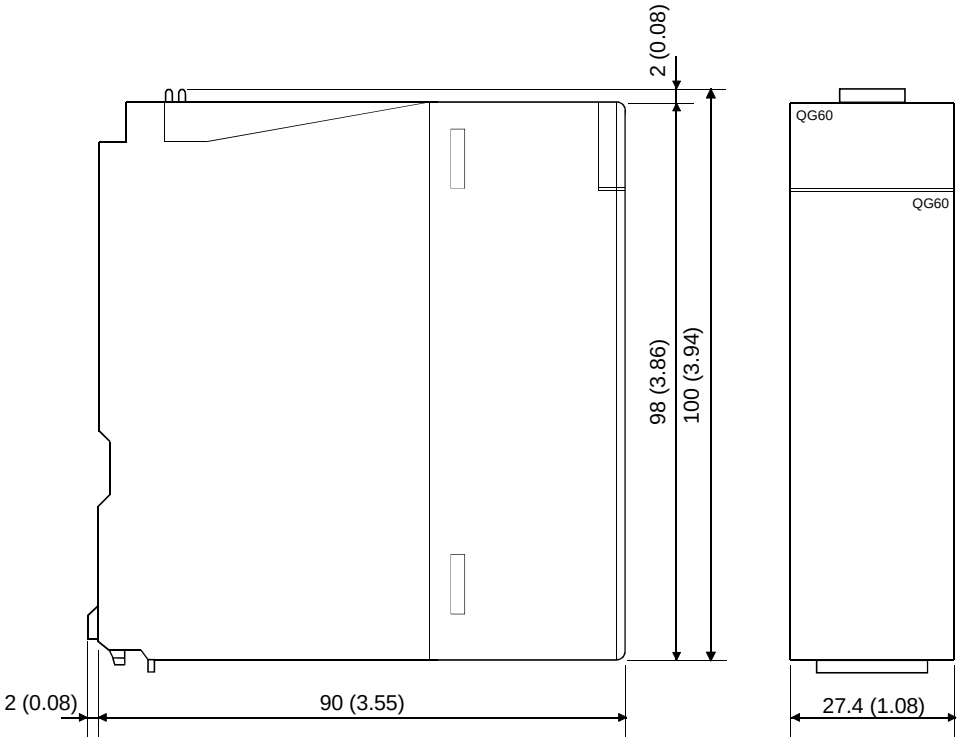

Unit: mm (inch)

App - 3

Appendix 1.2 Connectors, connector/terminal block converter modules

(1) 40-pin connectors

(a) A6CON1 soldering type, A6CON2 crimp-contact type 40-pin connector

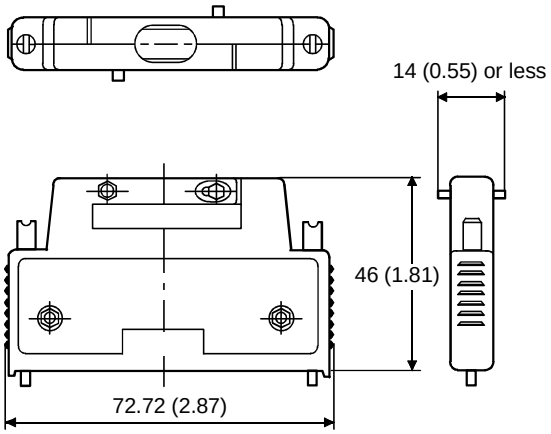

(b) A6CON3 pressure-displacement type 40-pin connector

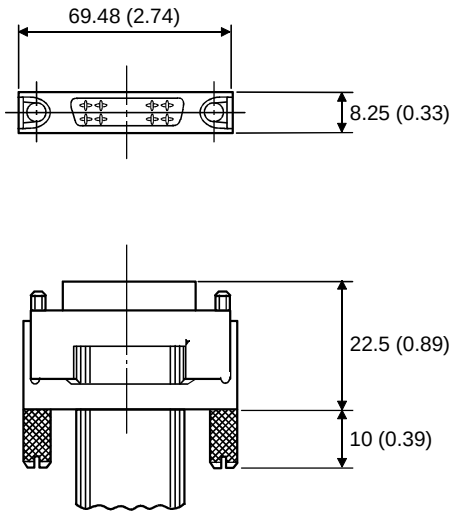

* Flat cable arrangement is in the following sequence.
A1 → B1 → A2…

Unit: mm (inch)

App - 4

(2) 37-pin D-sub connectors

(a) A6CON1E soldering type, A6CON2E crimp-contact type 37-pin D-sub connector

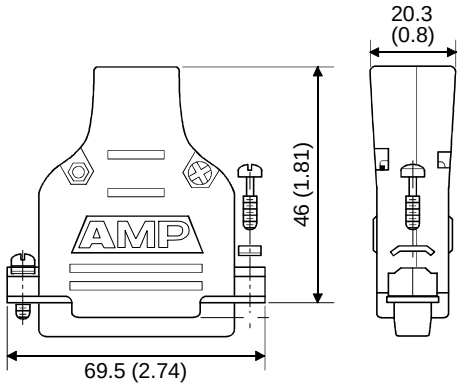

(b) A6CON3E pressure-displacement type 37-pin D-sub connector

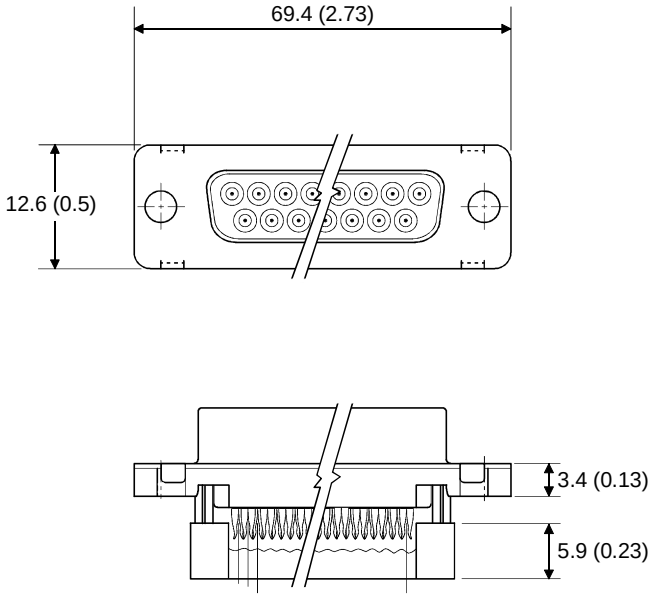

Unit: mm (inch)

App - 5

(3) A6TB □ 36 □ connector/terminal block converter module

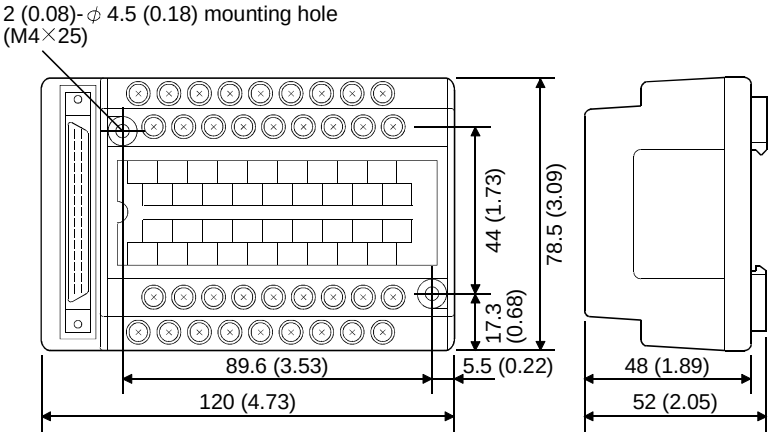

(4) A6TB □ 54 □ connector/terminal block converter module

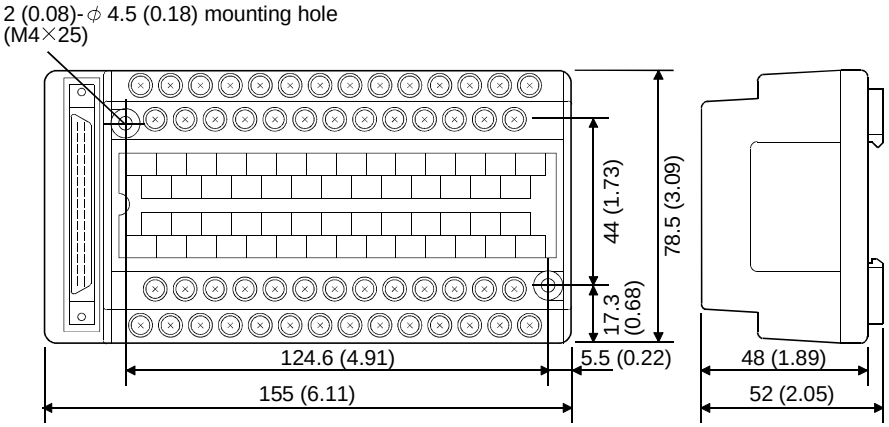

(5) A6TBX70 □ connector/terminal block converter module

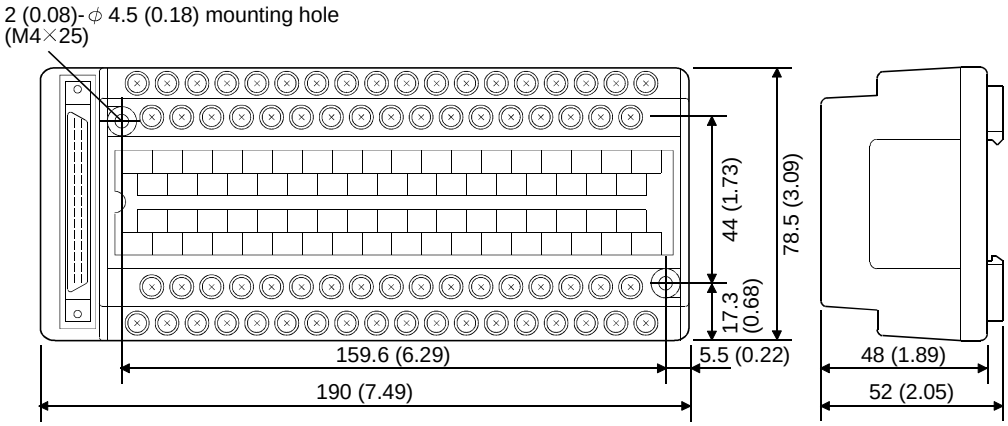

Unit: mm (inch)

App - 6

Appendix 1.3 Spring Clamp Terminal Block

(1) Q6TE-18S

Installed on a module (Example: QX10)

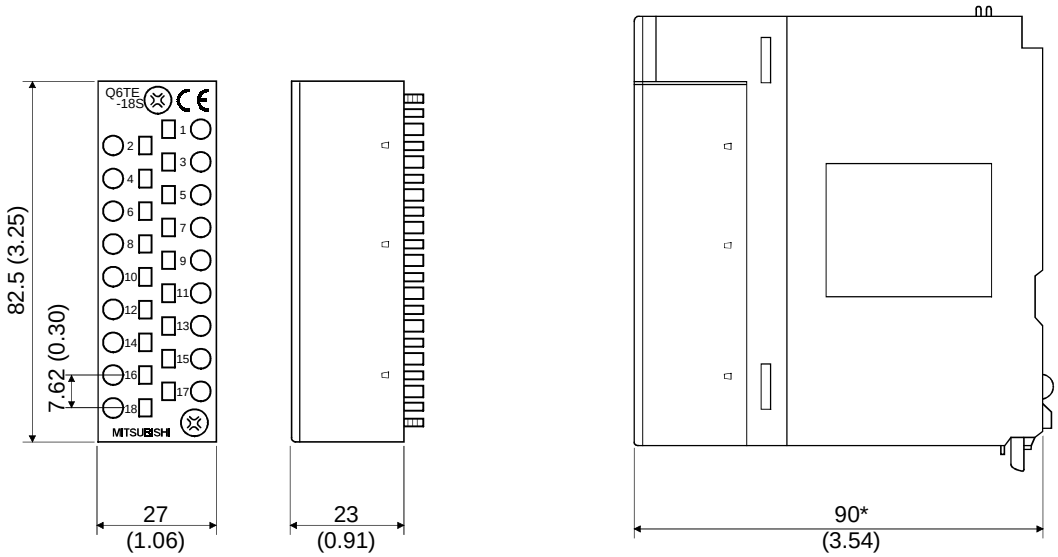

Unit: mm(inch)

*: The depth of the module installed with a Q6TE-18S is equivalent with the factory default dimensions for that module.

App - 7

Appendix 2 Compatibility with MELSEC-AnS Series I/O modules

Note that the MELSEC-Q series I/O modules and MELSEC-AnS series I/O modules are different in external terminal block configuration.
Differences in terminal block configuration are indicated below.

(1) Input modules

Terminal Block Number	QX10, QX40	QX80	A1SX10, A1SX40, A1SX80
TB9	X08	X08	COM
TB10	X09	X09	X08
TB11	X0A	X0A	X09
• • •	• • •	• • •	• • •
TB16	X0F	X0F	X0E
TB17	COM	NC	X0F
TB18	NC	COM	COM
TB19	—	—	Vacant
TB20	—	—	Vacant

(2) Output modules

Terminal Block Number	QY10	QY40P	A1SY10	A1SY40
TB9	Y08	Y08	COM1	12/24VDC
TB10	Y09	Y09	Y08	COM1
TB11	Y0A	Y0A	Y09	Y08
• • •	• • •	• • •	• • •	• • •
TB16	Y0F	Y0F	Y0E	Y0D
TB17	COM	12/24VDC	Y0F	Y0E
TB18	NC	COM	COM2	Y0F
TB19	—	—	24VDC	12/24VDC
TB20	—	—	0V	COM2

Terminal Block Number	QY50	A1SY50
TB9	Y08	12/24VDC
TB10	Y09	COM1
TB11	Y0A	Y08
•	•	•
•	•	•
•	•	•
TB16	Y0F	Y0D
TB17	12/24VDC	Y0E
TB18	COM	Y0F
TB19	—	12/24VDC
TB20	—	COM2

Terminal Block Number	QY80	A1SY80
TB9	Y08	COM1
TB10	Y09	0V
TB11	Y0A	Y08
•	•	•
•	•	•
•	•	•
TB16	Y0F	Y0D
TB17	COM	Y0E
TB18	0V	Y0F
TB19	—	COM2
TB20	—	0V

POINT

The 40-pin connector used with the MELSEC-AnS series I/O module can be used intact with the MELSEC-Q series I/O module.
The 37-pin D-sub connector used with the MELSEC-AnS series I/O module is the same in wiring as, but opposite in cable pulling direction to, the MELSEC-Q series I/O module. (The conventional cable for A6TB cannot be used.)

App - 9

WARRANTY

Please confirm the following product warranty details before starting use.

1. Gratis Warranty Term and Gratis Warranty Range

If any faults or defects (hereinafter "Failure") found to be the responsibility of Mitsubishi occurs during use of the product within the gratis warranty term, the product shall be repaired at no cost via the dealer or Mitsubishi Service Company. Note that if repairs are required at a site overseas, on a detached island or remote place, expenses to dispatch an engineer shall be charged for.

[Gratis Warranty Term]

The gratis warranty term of the product shall be for one year after the date of purchase or delivery to a designated place.

Note that after manufacture and shipment from Mitsubishi, the maximum distribution period shall be six (6) months, and the longest gratis warranty term after manufacturing shall be eighteen (18) months. The gratis warranty term of repair parts shall not exceed the gratis warranty term before repairs.

[Gratis Warranty Range]

(1) The range shall be limited to normal use within the usage state, usage methods and usage environment, etc., which follow the conditions and precautions, etc., given in the instruction manual, user's manual and caution labels on the product.

(2) Even within the gratis warranty term, repairs shall be charged for in the following cases.

1. Failure occurring from inappropriate storage or handling, carelessness or negligence by the user. Failure caused by the user's hardware or software design.
2. Failure caused by unapproved modifications, etc., to the product by the user.
3. When the Mitsubishi product is assembled into a user's device, Failure that could have been avoided if functions or structures, judged as necessary in the legal safety measures the user's device is subject to or as necessary by industry standards, had been provided.
4. Failure that could have been avoided if consumable parts (battery, backlight, fuse, etc.) designated in the instruction manual had been correctly serviced or replaced.
5. Failure caused by external irresistible forces such as fires or abnormal voltages, and Failure caused by force majeure such as earthquakes, lightning, wind and water damage.
6. Failure caused by reasons unpredictable by scientific technology standards at time of shipment from Mitsubishi.
7. Any other failure found not to be the responsibility of Mitsubishi or the user.

2. Onerous repair term after discontinuation of production

(1) Mitsubishi shall accept onerous product repairs for seven (7) years after production of the product is discontinued. Discontinuation of production shall be notified with Mitsubishi Technical Bulletins, etc.

(2) Product supply (including repair parts) is not possible after production is discontinued.

3. Overseas service

Overseas, repairs shall be accepted by Mitsubishi's local overseas FA Center. Note that the repair conditions at each FA Center may differ.

4. Exclusion of chance loss and secondary loss from warranty liability

Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation to damages caused by any cause found not to be the responsibility of Mitsubishi, chance losses, lost profits incurred to the user by Failures of Mitsubishi products, damages and secondary damages caused from special reasons regardless of Mitsubishi's expectations, compensation for accidents, and compensation for damages to products other than Mitsubishi products and other duties.

5. Changes in product specifications

The specifications given in the catalogs, manuals or technical documents are subject to change without prior notice.

6. Product application

(1) In using the Mitsubishi MELSEC programmable logic controller, the usage conditions shall be that the application will not lead to a major accident even if any problem or fault should occur in the programmable logic controller device, and that backup and fail-safe functions are systematically provided outside of the device for any problem or fault.

(2) The Mitsubishi general-purpose programmable logic controller has been designed and manufactured for applications in general industries, etc. Thus, applications in which the public could be affected such as in nuclear power plants and other power plants operated by respective power companies, and applications in which a special quality assurance system is required, such as for Railway companies or National Defense purposes shall be excluded from the programmable logic controller applications.

Note that even with these applications, if the user approves that the application is to be limited and a special quality is not required, application shall be possible.

When considering use in aircraft, medical applications, railways, incineration and fuel devices, manned transport devices, equipment for recreation and amusement, and safety devices, in which human life or assets could be greatly affected and for which a particularly high reliability is required in terms of safety and control system, please consult with Mitsubishi and discuss the required specifications.

HEADQUARTERS

MITSUBISHI ELECTRIC EUROPE B.V. — EUROPE
German Branch
Gothaer Straße 8
D-40880 Ratingen
Phone: +49 (0) 2102 / 486-0
Fax: +49 (0) 2102 / 486-1120
e mail: megfamail@meg.mee.com

MITSUBISHI ELECTRIC EUROPE B.V. — FRANCE
French Branch
25, Boulevard des Bouvets
F-92741 Nanterre Cedex
Phone: +33 1 55 68 55 68
Fax: +33 1 55 68 56 85
e mail: factory.automation@fra.mee.com

MITSUBISHI ELECTRIC EUROPE B.V. — IRELAND
Irish Branch
Westgate Business Park, Ballymount
IRL-Dublin 24
Phone: +353 (0) 1 / 419 88 00
Fax: +353 (0) 1 / 419 88 90
e mail: sales.info@meir.mee.com

MITSUBISHI ELECTRIC EUROPE B.V. — ITALY
Italian Branch
Via Paracelso 12
I-20041 Agrate Brianza (MI)
Phone: +39 039 6053 1
Fax: +39 039 6053 312
e mail: factory.automation@it.mee.com

MITSUBISHI ELECTRIC EUROPE B.V. — SPAIN
Spanish Branch
Carretera de Rubí 76-80
E-08190 Sant Cugat del Vallés
Phone: +34 9 3 / 565 3131
Fax: +34 9 3 / 589 2948
e mail: industrial@sp.mee.com

MITSUBISHI ELECTRIC EUROPE B.V. — UK
UK Branch
Travellers Lane
GB-Hatfield Herts. AL10 8 XB
Phone: +44 (0) 1707 / 27 61 00
Fax: +44 (0) 1707 / 27 86 95
e mail: automation@meuk.mee.com

MITSUBISHI ELECTRIC CORPORATION — JAPAN
Office Tower "Z" 14 F
8-12,1 chome, Harumi Chuo-Ku
Tokyo 104-6212
Phone: +81 3 6221 6060
Fax: +81 3 6221 6075

MITSUBISHI ELECTRIC AUTOMATION — USA
500 Corporate Woods Parkway
Vernon Hills, IL 60061
Phone: +1 847 / 478 21 00
Fax: +1 847 / 478 22 83

MIDDLE EAST REPRESENTATIVE

TEXEL Electronics Ltd. — ISRAEL
Box 6272
IL-42160 Netanya
Phone: +972 (0) 9 / 863 08 91
Fax: +972 (0) 9 / 885 24 30
e mail: texel_me@netvision.net.il

EUROPEAN REPRESENTATIVES

GEVA — AUSTRIA
Wiener Straße 89
AT-2500 Baden
Phone: +43 (0) 2252 / 85 55 20
Fax: +43 (0) 2252 / 488 60
e mail: office@geva.at

TEHNIKON — BELARUS
Oktjabrskaya 16/5, Ap 704
BY-220030 Minsk
Phone: +375 (0)17 / 22 75 704
Fax: +375 (0)17 / 22 76 669
e mail: tehnikon@belsonet.net

Getronics b.v. — BELGIUM
Control Systems
Pontbeeklaan 43
B-1731 Asse-Zellik
Phone: +32 (0) 2 / 467 17 51
Fax: +32 (0) 2 / 467 17 45
e mail: infoautomation@getronics.com

TELECON CO. — BULGARIA
4, A. Ljapchev Blvd.
BG-1756 Sofia
Phone: +359 (0) 2 / 97 44 05 8
Fax: +359 (0) 2 / 97 44 06 1
e mail: —

INEA CR d.o.o. — CROATIA
Drvinje 63
HR-10000 Zagreb
Phone: +385 (0) 1 / 36 67 140
Fax: +385 (0) 1 / 36 67 140
e mail: —

AutoCont — CZECH REPUBLIC
Control Systems s.r.o.
Nemocnicni 12
CZ-702 00 Ostrava 2
Phone: +420 59 / 6152 111
Fax: +420 59 / 6152 562
e mail: consys@autocont.cz

louis poulsen — DENMARK
industri & automation
Geminivej 32
DK-2670 Greve
Phone: +45 (0) 70 / 10 15 35
Fax: +45 (0) 43 / 95 95 91
e mail: lpia@lpmail.com

UTU Elektrotehnika AS — ESTONIA
Pärnu mnt.160i
EE-11317 Tallinn
Phone: +372 (0) 6 / 51 72 80
Fax: +372 (0) 6 / 51 72 88
e mail: utu@utu.ee

Beijer Electronics OY — FINLAND
Ansatie 6a
FIN-01740 Vantaa
Phone: +358 (0) 9 / 886 77 500
Fax: +358 (0) 9 / 886 77 555
e mail: info@beijer.fi

UTECO A.B.E.E. — GREECE
5, Mavrogenous Str.
GR-18542 Piraeus
Phone: +302 (0) 10 / 42 10 050
Fax: +302 (0) 10 / 42 12 033
e mail: sales@uteco.gr

Meltrade Automatika Kft. — HUNGARY
55, Harmat St.
HU-1105 Budapest
Phone: +36 (0)1 / 2605 602
Fax: +36 (0)1 / 2605 602
e mail: office@meltrade.hu

SIA POWEL — LATVIA
Lienes iela 28
LV-1009 Riga
Phone: +371 784 / 22 80
Fax: +371 784 / 22 81
e mail: utu@utu.lv

EUROPEAN REPRESENTATIVES

UAB UTU POWEL — LITHUANIA
Savanoriu pr. 187
LT-2053 Vilnius
Phone: +370 (0) 52323-101
Fax: +370 (0) 52322-980
e mail: powel@utu.lt

INTEHSIS SRL — MOLDOVA
Cuza-Voda 36/1-81
MD-2061 Chisinau
Phone: +373 (0)2 / 562 263
Fax: +373 (0)2 / 562 263
e mail: intehsis@mdl.net

Getronics b.v. — NETHERLANDS
Control Systems
Donauweg 2 B
NL-1043 AJ Amsterdam
Phone: +31 (0) 20 / 587 67 00
Fax: +31 (0) 20 / 587 68 39
e mail: info.gia@getronics.com

Beijer Electronics AS — NORWAY
Teglverksveien 1
N-3002 Drammen
Phone: +47 (0) 32 / 24 30 00
Fax: +47 (0) 32 / 84 85 77
e mail: info@beijer.no

MPL Technology Sp. z o.o. — POLAND
ul. Sliczna 36
PL-31-444 Kraków
Phone: +48 (0) 12 / 632 28 85
Fax: +48 (0) 12 / 632 47 82
e mail: krakow@mpl.pl

Sirius Trading & Services srl — ROMANIA
Str. Biharia No. 67-77
RO-013981 Bucuresti 1
Phone: +40 (0) 21 / 201 1146
Fax: +40 (0) 21 / 201 1148
e mail: sirius@siriustrading.ro

INEA d.o.o. — SLOVENIA
Stegne 11
SI-1000 Ljubljana
Phone: +386 (0) 1-513 8100
Fax: +386 (0) 1-513 8170
e mail: inea@inea.si

Beijer Electronics AB — SWEDEN
Box 426
S-20124 Malmö
Phone: +46 (0) 40 / 35 86 00
Fax: +46 (0) 40 / 35 86 02
e mail: info@beijer.se

ECONOTEC AG — SWITZERLAND
Postfach 282
CH-8309 Nürensdorf
Phone: +41 (0) 1 / 838 48 11
Fax: +41 (0) 1 / 838 48 12
e mail: info@econotec.ch

GTS — TURKEY
Darülaceze Cad. No. 43 Kat. 2
TR-80270 Okmeydani-Istanbul
Phone: +90 (0) 212 / 320 1640
Fax: +90 (0) 212 / 320 1649
e mail: gts@turk.net

CSC Automation Ltd. — UKRAINE
15, M. Raskova St., Fl. 10, Office 1010
UA-02002 Kiev
Phone: +380 (0) 44 / 238-83-16
Fax: +380 (0) 44 / 238-83-17
e mail: csc-a@csc-a.kiev.ua

EUROPEAN REPRESENTATIVES

Avtomatika Sever Ltd. — RUSSIA
Lva Tolstogo St. 7, Off. 311
RU-197376 St Petersburg
Phone: +7 812 / 11 83 238
Fax: +7 812 / 11 83 239
e mail: as@avtsev.spb.ru

CONSYS — RUSSIA
Promyshlennaya St. 42
RU-198099 St Petersburg
Phone: +7 812 / 325 36 53
Fax: +7 812 / 147 20 55
e mail: consys@consys.spb.ru

Electrotechnical Systems Siberia — RUSSIA
Partizanskaya St. 27, Office 306
RU-121355 Moscow
Phone: +7 095/ 416-4321
Fax: +7 095/ 416-4321
e mail: info@eltechsystems.ru

Electrotechnical Systems Siberia — RUSSIA
Shetinkina St. 33, Office 116
RU-630088 Novosibirsk
Phone: +7 3832 / 22-03-05
Fax: +7 3832 / 22-03-05
e mail: info@eltechsystems.ru

Elektrostyle — RUSSIA
ul. Garschina 11
RU-140070 Moscow
Phone: +7 095 / 514 9316
Fax: +7 095 / 514 9317
e mail: info@estl.ru

Elektrostyle — RUSSIA
Krasnij Prospekt 220-1
Office No. 312
RU-630049 Novosibirsk
Phone: +7 3832 / 10 66 18
Fax: +7 3832 / 10 66 26
e mail: info@estl.ru

ICOS — RUSSIA
Industrial Computer Systems Zao
Ryazanskij Prospekt 8a, Office 100
RU-109428 Moscow
Phone: +7 095 / 232 - 0207
Fax: +7 095 / 232 - 0327
e mail: mail@icos.ru

NPP Uralelektra — RUSSIA
ul. Sverdlova 11a
RU-620027 Ekaterinburg
Phone: +7 34 32 / 53 27 45
Fax: +7 34 32 / 53 27 45
e mail: elektra@etel.ru

SSMP Rosgidromontazh Ltd. — RUSSIA
23, Lesoparkovaya Str.
RU-344041 Rostov On Don
Phone: +7 8632 / 36 00 22
Fax: +7 8632 / 36 00 26
e mail: —

STC Drive Technique — RUSSIA
ul. Bajkalskaja 239, Office 2 - 23
RU-664075 Irkutsk
Phone: +7 3952 / 24 38 16
Fax: +7 3952 / 23 02 98
e mail: privod@irk.ru

STC Drive Technique — RUSSIA
Poslannikov Per. 9, str.1
RU-107005 Moscow
Phone: +7 095 / 790-72-10
Fax: +7 095 / 790-72-12
e mail: info@privod.ru

AFRICAN REPRESENTATIVE

CBI Ltd. — SOUTH AFRICA
Private Bag 2016
ZA-1600 Isando
Phone: +27 (0) 11/ 928 2000
Fax: +27 (0) 11/ 392 2354
e mail: cbi@cbi.co.za